



INSTRUCTIONS FOR REPLACING CIRCUIT BOARD ON MODEL 760 APRILAIRE® HUMIDIFIERS (BEFORE SERIAL NO. 34457)

WARNING! 120 VOLTS MAY CAUSE SERIOUS INJURY FROM ELECTRICAL SHOCK.
DISCONNECT POWER & SHUT OFF WATER SUPPLY BEFORE SERVICING.

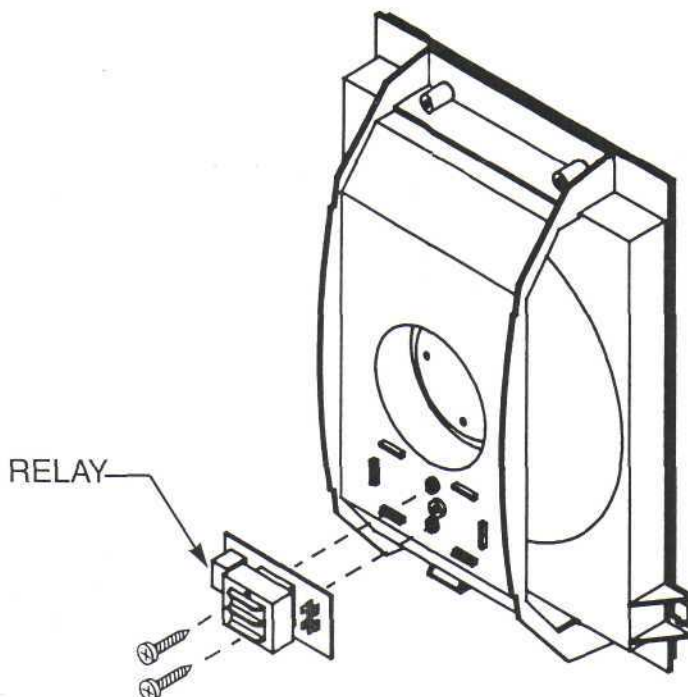

1. Unplug power cord and remove outer housing from unit.
2. Disassemble fan shroud and motor board and remove existing circuit board. Replace wire harness as needed.
3. Using template provided, mark and drill two 7/64" diameter holes into motor board.
4. Place new circuit board on motor board within ribs. **Important! Make sure the relay is in the upper left hand corner as shown on the wiring diagram.** Attach with the two screws furnished.
5. Reconnect wires to circuit board according to circuit board graphics and wiring diagram below.

WIRING DIAGRAM

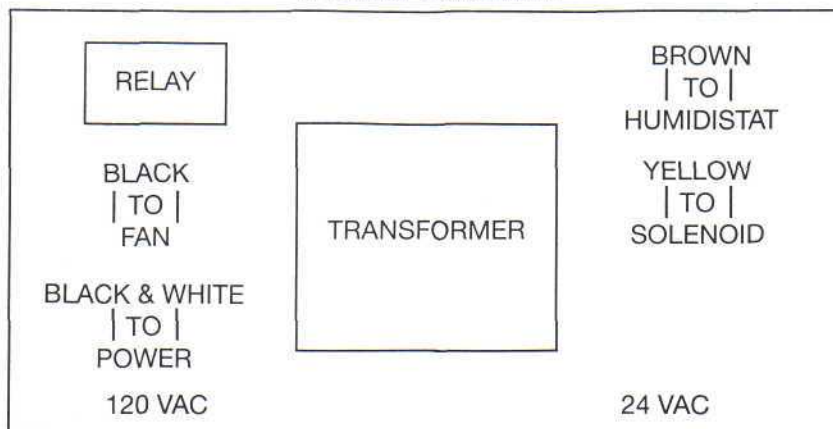

RESEARCH PRODUCTS CORPORATION

P.O. BOX 1467 • MADISON, WI 53701-1467

Call 800/334-6011 • FAX 608/257-4357

Products For Better Indoor Air Quality