



PACKAGE TERMINAL AIR CONDITIONER (PTAC) AND HEAT PUMP

Specifications and Accessories Catalog

Wise Decision.
It's an Amana® brand.



Amana is a registered trademark of Maytag Corporation or its related companies and is used under license to Goodman Company, L.P., Houston, TX, USA. All rights reserved.

Premium Amana®
Brand Quality

Featuring
DigiSmart®

Web-Based
Monitoring

DIGISMART®

A Combination of Energy Management and PTAC Performance

Amana® brand DigiSmart® brings together our best PTAC with our best energy management software that now integrates with optional property management and front desk management software. Reduce PTAC energy consumption up to 35% OR MORE* through the power of the in-unit energy management system, programmable temperature set-back, and temperature limiting combined. Our Maintenance Notification System can alert when there is a potential maintenance issue with the PTAC.

Amana brand DigiSmart Solution

In-Room "Self-Installable" Wireless Peripherals



The **DigiSmart Wireless Remote Thermostat** can be mounted on the wall anywhere in the guest room. It is Battery powered and with its own wireless ability to communicate with the PTAC to maintain room temperature.

Best of all, there are no wires to run. The PTAC and thermostat connect at the press of a button and work in-sync to display accurate temperature.



The **DigiSmart Occupancy Sensor and Door Switch Combo Device** completes the in-room equipment. This infrared sensor can determine whether the room is occupied or empty and when empty, signal the PTAC to adjust the temperature to save energy based on programmable set-backs.



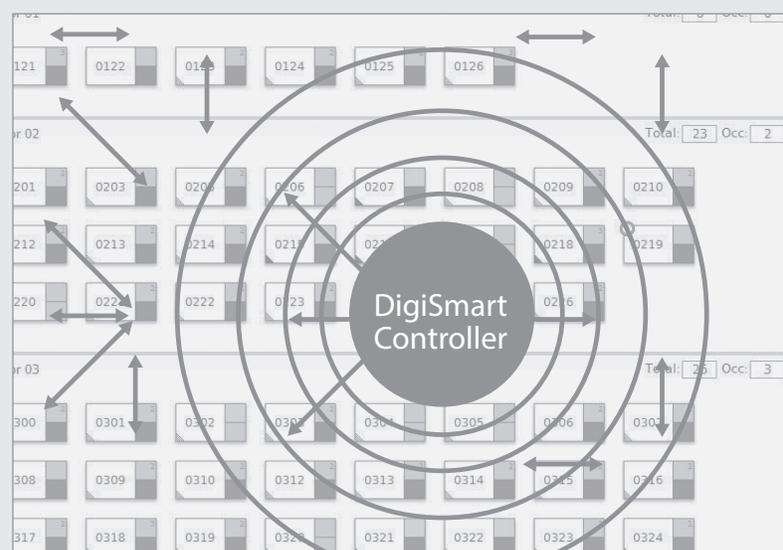
The **DigiSmart Wireless Antenna** installs inside the PTAC with a snap-in connector like a telephone jack. Installing the antenna allows the PTAC to communicate wirelessly with other devices in the room and to the DigiSmart network.

- 60,000+ rooms have had wireless installations since 2005
- Total wireless devices deployed to date: 425,000+


The Amana brand DigiSmart PTAC with antenna, combined with the self-installable, wireless thermostat and occupancy sensor give the property owner complete control over the equipment settings and can reduce PTAC energy usage up to **35% OR MORE.***

Site-Level — Central Wireless Controller

- Site-wide PTAC Configuration
- Site-wide PTAC Diagnostics
- Front-Desk System Interface
- Email Reporting
- Internet Accessible Web User Interface Enterprise



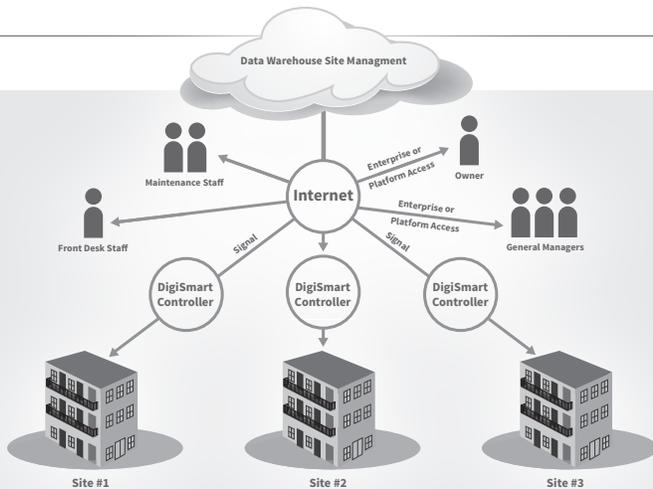* These savings represent estimated savings over time and were generated using general assumptions including energy loads, local weather averages and use of occupancy controls. Actual savings will vary according to actual use habits, room square footage, and how the unit is installed and maintained.



Enterprise – Multiple Wireless Controllers

Central Monitoring and Control of Multiple Properties

- Data Warehousing
- Virtual Metering
- Savings Analysis
- Load Shedding
- Email Reporting

Web-Based Monitoring – Amana® brand DigiSmart® Controller

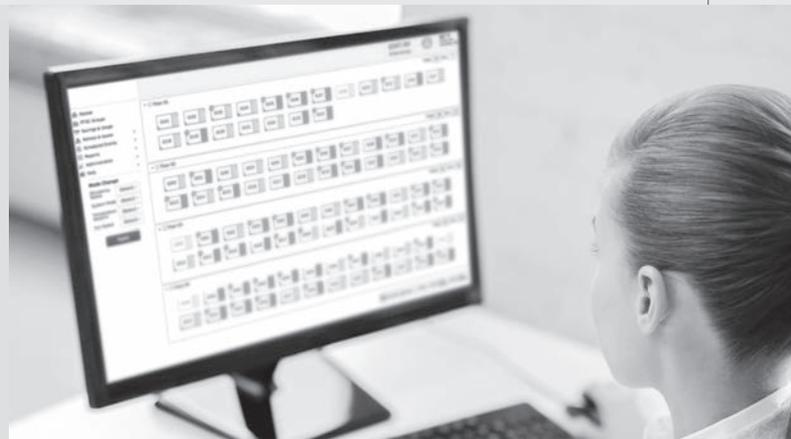
All PTACs in a building can be managed through a single interface on a PC.

Features Include:

- Full unit details for every PTAC, visible from the front desk or home office
- Automatic emails for PTAC maintenance
- Ability to change all settings on the unit
- Enhanced diagnostics
- Monitors up to 170 PTACs WIRELESSLY with one controller
- Expand the network with additional controllers
 - System Verification
 - Site Statistics
 - Global Setbacks
 - Email Reporting
 - EMS Configuration
 - Unit Health
 - Site Statistics
 - Unit Code Alerts

Unrented Set-Points

By integrating with your property's Front Desk System, the PTACs will adjust to specific set-points when no longer identified as rented in the system.



Temp Limiting

Each PTAC can be configured with a heating and cooling temperature set-point limit.

Set-backs

Once a room is declared unoccupied by the occupancy sensor, the PTAC progresses through three different temperature set-backs, configured as three degree and time pairs (An example configuration is listed below).

1. **2°, 30 mins** – Setback the temp 2 degrees after 30 minutes
2. **4°, 1 hr** – Setback the temp 2 more degrees after 30 more minutes
3. **8°, 3 hrs** – Setback the temp 4 more degrees after 2 more hours

Talk to your Amana brand dealer about opportunities to optimize the efficiency of your new unit. Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operating cost or energy efficiency rating that is available from your dealer.

Standard Features

- **Energy Efficiencies:** With EERs up to 12.0 and COPs up to 3.4, our unit's high efficiencies may qualify you for many of the rebates offered by electrical power companies.
- **Quiet Operation:** Our PTAC has been redesigned to be the quietest PTAC we've ever built. The unit's state-of-the-art design and construction provide a quiet environment, allowing guests to enjoy peaceful, sleep-filled nights.
 - Two fan motors (indoor/outdoor)
 - Indoor tangential fan for quiet operation
 - STC of 28
- **Assembled in the USA for 35 years:** assembled at our plant in Fayetteville, TN, using Goodman resources including engineering, production, and testing.
- **Increased Dehumidification Capacity:** Maintain lower humidity levels in rooms while cooling them without the need for expensive add-ons. As a result, guests feel more comfortable at higher temperatures, thus reducing cooling costs.
- **Seven-Button Touch Pad:** Provides complete control to guests for in-room comfort while maintaining energy efficiency.
- **Five-Year Limited Warranty:** Enjoy one of the most comprehensive warranties in the industry: First Year: parts & labor; Second through fifth years: parts & labor on certain sealed system components; second through fifth years: on certain functional parts only. For complete warranty details, visit www.amana-ptac.com.
- **100% Run Tested:** All units are 100% run tested at our plant in Fayetteville, TN, including leak checks during manufacturing and again prior to shipment at the warehouse.
- **7 $\frac{5}{8}$ " Unit Front Depth:** Enhance valuable room space with our slim unit front, which has a sleek 7 $\frac{5}{8}$ " depth, one of the shallowest silhouettes in the industry today. In addition, to inhibit guest-tampering, the front can be secured to the chassis with a hidden screw.
- **Easy Pull-Out Filters:** Our filters are washable and easy to maintain.
- **Filter Dryer for Sealed System Refrigerant:** Standard in all units to protect the compressor and lengthen the life of the unit by removing moisture and preventing acid formation.
- **Condensate Dispersion System:** Our condensate dispersion system removes condensate from indoor cooling operation by throwing water directly on to the outdoor coil for rapid evaporation and increased cooling efficiencies. The slinger ring on the new, enhanced fan draws water up and into the fan blades. This water is then atomized and evaporated into the atmosphere through the condenser. Increased surface area from the coil allows more water to be evaporated on the sides of the coils and helps to minimize condensate run-off.
- **Front Desk Control:** Each unit comes equipped with the DigiSmart™ control and energy management software. Using the DigiSmart™ software and optional RF Antenna, all units can be wirelessly connected to a central hub for enhanced energy savings and diagnostics. Amana brand PTACs also have a low-voltage interface capability with a field-supplied front-desk ON/OFF switch. (See inside front cover.)

- **Room Freeze Protection:** When the unit senses temperatures of 40°F or below, the unit activates the fan motor and either the electric resistance heater or the hydronic heater.
- **Easy-to-use Controls:** No complex controls to confuse your guests and create phone calls for your manager. Controls are easy to read, understand, and activate. Our new 7-button control panel provides guests with complete control of the unit for their in-room comfort while maintaining overall energy efficiency.
- **Easy to Service with On-Board LED Diagnostics:** The main components are easily serviced and there is no guessing to determine the problem with our easy-to-read diagnostics.
- **Stonewood Room Front:** Our Stonewood room front strikes the balance between attractive styling and practical design. Distinctive contours and a modern appearance enhance the character of even the most luxurious room, while the sleek 7⁵/₈" depth maximizes usable space for your guests.
- **Remote Thermostat Control:** When the DigiSmart™ wireless remote thermostat (DS01E, sold separately) is set up, both the remote thermostat and unit control panel continue to control the unit, providing flexibility and home-like system control. Installation requires no more than pressing two buttons. No need to run wires or make electrical connections.
- **Extended Heat Pump Heating:** Heat pump models will operate in the heating mode down to as low as 24°F outdoor ambient temperature.
- **Zero Floor Clearance:** The unit can be installed flush to a finished floor, if desired. (Some accessories do not have zero clearance).
- **30-Second Fan-Off Delay:** The fan continues to run 30 seconds after the compressor has stopped in either cooling or heat pump mode and after electric heat has been turned off. This improves efficiency by dispersing the conditioned air on the coils into the room.
- **Compressor Lock-In:** This feature helps prolong the life of the compressor by preventing short-cycling. When the compressor is switched from Off to On because room temperature has risen or fallen below the specified limit, it will remain on for at least 4 minutes. If the temperature set-point is changed during this 4 minutes, the lock-in feature is overridden.
- **Automatic Emergency Heat:** No more “my unit is not heating” complaints during the middle of the night. Heat pump units will automatically switch over to electric resistance heat if the heat pump compressor system fails or if the heating load is greater than the unit capacity.
- **Constant Fan Mode:** Take advantage of each unit’s dual options — select continuous fan operation or cycle the fan ON and OFF with the thermostat. Our 7-button design allows guests to select fan performance while allowing the owner to have the unit revert to the desired program of continuous fan or cycle with conditioning.
- **Hidden Ventilation Control:** The ventilation control lever is hidden from the occupant’s view to allow you to manage ventilation requirements.
- **High-Pressure Switch:** Protects the unit from high pressure and damage to the unit, helping to ensure long unit life.

Nomenclature

| | | PTC | 07 | 3 | G | 35 | AXXX | AA | | | |
|---------------------------------|---------------------------------|-------------|-----|---|---|-----|-------------|--|----------------------------|---------------|---------------------------------|
| | | 1,2,3 | 4,5 | 6 | 7 | 8,9 | 10,11,12,13 | 14,15 | | | |
| Basic Model Type | | | | | | | | Engineering | | | |
| PTC | Standard Cooler | | | | | | | Major & Minor Revisions | | | |
| PTH | Standard Heat Pump | | | | | | | | | | |
| DRY | Dehumid Cooler | | | | | | | | | | |
| PMC | DigiAIR Cooler | | | | | | | | | | |
| PMH | DigiAIR Heat Pump | | | | | | | | | | |
| Nominal Cooling Capacity | | | | | | | | Features Code * | | | |
| 07 | 7,000 BTU/h | 60 Hz | | | | | | | | A | Standard Model |
| 09 | 9,000 BTU/h | 60 Hz | | | | | | | | C | Corrosion Protection (Seacoast) |
| 10 | 10,000 BTU/h | 50 Hz | | | | | | | | D | Power Door |
| 12 | 12,000 BTU/h | 50 or 60 Hz | | | | | | | | F | Fuse Holder (230/208V Only) |
| 15 | 15,000 BTU/h | 60 Hz | | | | | | | | L | Lighting Control |
| 17 | 17,000 BTU/h | 60 Hz | | | | | | | | H | Hydronic Heat-Capable |
| | | | | | | | | P | Condensate Pump (PTH Only) | | |
| | | | | | | | | Q | Quiet STC 31 Chassis | | |
| | | | | | | | | R | RF Antenna | | |
| | | | | | | | | V | Power Vent | | |
| | | | | | | | | X | placeholder | | |
| | | | | | | | | W | Hard-Wired (PTQC) | | |
| Rated Voltage | | | | | | | | Heater Size | | | |
| 2 | 115V, 60 Hz, 1 Phase | | | | | | | 00 | No Electric Heat | 35 | 3.5 kW (230/208V) |
| 3 | 230/208V, 60 Hz, 1 Phase | | | | | | | 15 | 1.5 kW | | 3.7 kW (265V) |
| 4 | 265V, 60 Hz, 1 Phase | | | | | | | 25 | 2.5 kW | 50 | 5.0 kW |
| 5 | 240/220V, 50 Hz, 1 Phase Export | | | | | | | | | | |
| Design Series | | | | | | | | | | | |
| G | R-410A | | | | | | | * Use up to 4 as needed in alphabetical order. Examples: | | | |
| | | | | | | | | PTC123*50AXXX | | PTC073*35CRXX | |
| | | | | | | | | PTC123*50CXXX | | PTC073*25CQRW | |

Power Cord Configuration

| Power Cord Plugs | | Power Receptacle Configuration | | | | |
|---|--------|--------------------------------|--|---|---|---|
| 250V Rating Power Cord Plugs with LCDI Device NEMA 6 Configuration | | | | | | |
| 15 amp | 20 amp | 30 amp | | NEMA6-15R; 250V receptacle used on 230/208V units | NEMA6-20R; 250V receptacle used on 230/208V units | NEMA6-30R; 250V receptacle used on 230/208V units |
| 277V Rating Power Cord Plugs NEMA 7 Configuration | | | | | | |
| 20 amp | 30 amp | | | NEMA7-20R; 277V receptacle used on 265V units | NEMA7-30R; 277V receptacle used on 265V units | |
| All units come with factor-installed power cords. All units less than 250 volts come with LCDI device. | | | | | | |

Product Specifications: PTC Models — Cooling/Electric Heat

| 230/208 Volts | | | | | | |
|-------------------------------------|------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Model ^{6,8,9} | | PTC 073G***XXX | PTC 093G***XXX | PTC 123G***XXX | PTC 153G***XXX | PTC 173G***XXX |
| Voltage ³ | | 230 / 208 | 230 / 208 | 230 / 208 | 230 / 208 | 230 / 208 |
| Capacity (BTU/h) | | 7,700 / 7,700 | 9,000 / 9,000 | 12,000 / 11,700 | 15,000 / 14,700 | 16,400 / 16,200 |
| Amps ¹⁰ | | 3.5 / 3.5 | 4.1 / 4.1 | 5.6 / 5.6 | 7.0 / 7.0 | 8.4 |
| Watts ¹⁰ | | 658 / 658 | 796 / 783 | 1,114 / 1,085 | 1,500 / 1,470 | 1,740 / 1,720 |
| EER | | 11.7 / 11.7 | 11.3 / 11.5 | 10.4 / 10.5 | 10.0 / 10.0 | 9.4 |
| Unit without Electric Heater | | | | | | |
| Min. Circuit Amps ^{2,4,10} | | 4.2 | 4.9 | 6.8 | 8.5 | 10.2 |
| CFM (Cool/Wet Coil) | High | 290 | 290 | 290 | 340 | 340 |
| | Low | 264 | 264 | 264 | 314 | 314 |
| CFM (Dry Coil) | High | 310 | 310 | 310 | 360 | 360 |
| | Low | 282 | 282 | 282 | 332 | 332 |
| Ventilated Air, CFM (Fan Only)* | | 65* | 65* | 65* | 65* | 65* |
| Dehumidification (Pints/Hr.) | | 1.7 | 2.2 | 3.6 | 4.4 | 4.8 |
| Net Weight (lbs.) | | 98 | 102 | 102 | 113 | 113 |
| Ship Weight (lbs.) | | 113 | 117 | 119 | 130 | 130 |
| 265/277 Volts | | | | | | |
| Model ^{1,6,8} | | PTC 074G***XXX | PTC 094G***XXX | PTC 124G***XXX | PTC 154G***XXX | |
| Voltage ^{1,3} | | 265 | 265 | 265 | 265 | |
| Capacity (BTU/h) | | 7,700 | 9,000 | 12,000 | 14,800 | |
| Amps ¹⁰ | | 3.0 | 3.6 | 4.8 | 6.0 | |
| Watts ¹⁰ | | 658 | 796 | 1,154 | 1,480 | |
| EER | | 11.7 | 11.3 | 10.4 | 10.0 | |
| Unit without Electric Heater | | | | | | |
| Min. Circuit Amps ^{2,4,10} | | 3.6 | 4.4 | 5.9 | 7.4 | |
| CFM (Cool/Wet Coil) | High | 290 | 290 | 290 | 340 | |
| | Low | 264 | 264 | 264 | 314 | |
| CFM (Dry Coil) | High | 310 | 310 | 310 | 360 | |
| | Low | 282 | 282 | 282 | 332 | |
| Ventilated Air, CFM (Fan Only)* | | 65* | 65* | 65* | 65* | |
| Dehumidification (Pints/Hr.) | | 1.7 | 2.2 | 3.6 | 4.4 | |
| Net Weight (lbs.) | | 98 | 102 | 102 | 113 | |
| Ship Weight (lbs.) | | 113 | 117 | 119 | 130 | |

* Actual vent CFM performance will vary due to application and installation conditions.

NOTES

- ¹ All 265-volt models must use an Amana® brand sub-base (PTS4**E) or an Amana® brand hard-wire kit PTPWHWK4 and disconnect switch PSHW04A.
- ² Minimum Circuit Ampacity (MCA) ratings conform to the National Electric Code; however, local codes should apply.
- ³ Minimum voltage on 230/208-volt models is 197 volts; maximum is 253 volts. Minimum voltage on 265-volt models is 239 volts; maximum is 292 volts.
- ⁴ Overcurrent protection for all units without electric heaters is 15 amps. Overcurrent protection on 265-volt models must be cartridge-style time-delay fuses (included and factory-installed on all Amana® brand 265-volt chassis). See heater performance.
- ⁵ Heating capacity and efficiency based on unit operation without condensate pump; unit automatically switches to electric heat at approximately 24°F outdoor ambient.
- ⁶ Specify two-digit heater kW size to complete model number.
- ⁷ R-410A refrigerant used in all systems.
- ⁸ All units meet or exceed ASHRAE 90.1 standards.
- ⁹ All units less than 250 volts have a Leak Current Detector Interrupter (LCDI) power cord and meet UL 484 standards.
- ¹⁰ Refer to electric heat performance data for total MCA and recommended overcurrent protection. Amps and Watts notation refers to compressor only.

Product Specifications: PTH Models — Cooling/Heat Pump/Electric Heat

| MODEL ^{1, 6, 8, 9} | PTH073G **AXXX | PTH093G **AXXX | PTH123G **AXXX | PTH153G **AXXX | PTH074G **AXXX | PTH094G **AXXX | PTH124G **AXXX | PTH154G **AXXX | |
|--|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-----|
| Voltage ^{1, 3} | 230 / 208 | 230 / 208 | 230 / 208 | 230 / 208 | 265 | 265 | 265 | 265 | |
| Capacity (BTU/h) | 7,600 / 7,600 | 9,000 / 9,000 | 12,000 / 12,000 | 14,700 / 14,700 | 7,600 | 9,100 | 12,000 | 14,600 | |
| Amps ¹⁰ | 3.9 / 3.9 | 4.2 / 4.2 | 5.8 / 5.8 | 7.0 / 7.0 | 3.1 | 3.7 | 5.0 | 6.1 | |
| Watts ¹⁰ | 650 / 633 | 750 / 750 | 1,090 / 1,090 | 1,515 / 1,515 | 650 | 758 | 1,091 | 1,505 | |
| EER | 11.7 / 12.0 | 12.0/12.0 | 11.0/11.0 | 9.7 / 9.7 | 11.7 | 12.0 | 11.0 | 9.7 | |
| UNIT WITHOUT ELECTRIC HEATER | | | | | | | | | |
| Min. Circuit Amps ^{2, 4, 10} | 4.7 | 5.1 | 7.1 | 8.5 | 3.8 | 4.5 | 6.1 | 7.4 | |
| CFM (Cool/Wet Coil) | High | 340 | 330 | 340 | 390 | 340 | 330 | 340 | 390 |
| | Low | 245 | 245 | 245 | 340 | 245 | 245 | 245 | 340 |
| CFM (Dry Coil) | High | 370 | 360 | 370 | 410 | 370 | 360 | 370 | 410 |
| | Low | 270 | 270 | 270 | 370 | 270 | 270 | 270 | 370 |
| Ventilated Air, CFM (Fan Only)* | 65* | 65* | 65* | 65* | 65* | 65* | 65* | 65* | |
| Dehumidification (Pints/Hr.) | 1.7 | 2.2 | 3.6 | 4.4 | 1.7 | 2.2 | 3.6 | 4.4 | |
| Net Weight (lbs.) | 108 | 112 | 115 | 126 | 108 | 112 | 115 | 125 | |
| Ship Weight (lbs.) | 123 | 127 | 132 | 143 | 123 | 127 | 132 | 142 | |

* Actual vent CFM performance will vary due to application and installation conditions.

NOTES

- ¹ All 265-volt models must use an Amana® brand sub-base (PTSB4**E) or an Amana® brand hard-wire kit (PTPWHWK4).
- ² Minimum Circuit Ampacity (MCA) ratings conform to the National Electric Code; however, local codes should apply. Minimum voltage on 230/208-volt models is 197 volts; maximum is 253 volts.
- ³ Minimum voltage on 265-volt models is 239 volts; maximum is 292 volts.
- ⁴ Overcurrent protection for all units without electric heaters is 15 amps. Overcurrent protection on 265-volt models must be cartridge-style time-delay fuses (included and factory-installed on all Amana® brand 265-volt chassis).
- ⁵ Heating capacity and efficiency based on unit operation without condensate pump; unit automatically switches to electric heat at approximately 24°F outdoor ambient.
- ⁶ Specify two-digit heater kW size to complete model number.
- ⁷ R-410A refrigerant used in all systems.
- ⁸ All units meet or exceed ASHRAE 90.1 standards.
- ⁹ All units less than 250 volts have a Leak Current Detector Interrupter (LCDI) power cord and meet UL 484 standards.
- ¹⁰ Refer to electric heat performance data for total MCA and recommended overcurrent protection. Amps and Watts notation refers to compressor only.

Product Specifications: PTC 115-Volt Models — Cooling/Hydronic Heat or No-Heat Models

| MODEL ^{5, 6} | | PTC 072G**XXX | PTC 092G**XXX |
|-----------------------------------|------|------------------|------------------|
| Voltage ² | | 115 | 115 |
| Capacity (BTU/h) | | 7000 | 9000 |
| Amps | | 6.9 | 8.3 |
| Watts | | 585 | 795 |
| EER | | 11.9 | 11.3 |
| Min. Circuit Amps ^{1, 3} | | 8.3 | 10.1 |
| CFM (Cool/Wet Coil) | High | 290 | 290 |
| | Low | 264 | 264 |
| CFM (Dry Coil) | High | 310 | 310 |
| | Low | 282 | 282 |
| Ventilated Air, (Fan Only)* | | 65* | 65* |
| Dehumidification (Pints/Hr.) | | 1.7 | 2.3 |
| Net Weight (lbs.) | | 98 | 102 |
| Ship Weight (lbs.) | | 113 | 117 |

* Actual vent CFM performance will vary due to application and installation conditions.

NOTES

- ¹ Minimum Circuit Ampacity (MCA) ratings conform to the National Electric Code; however, local codes should apply.
- ² Minimum voltage on 115-volt models is 109 volts; maximum is 127 volts.
- ³ Overcurrent protection for all units without electric heaters is 15 amps.
- ⁴ R-410A refrigerant used in all systems.
- ⁵ All units meet or exceed ASHRAE 90.1 standards.
- ⁶ All units less than 250 volts have a Leak Current Detector Interrupter (LCDI) power cord and meet UL 484 standards.

Product Specifications: PTC / PTH Models — Electric Heat Performance

(Primary Heating for PTC Models; Auxiliary Heating for PTH Models; See below for Power Cord Configuration)

| VOLTAGE | ELECTRIC HEATER SIZE (kW) | NO. OF STAGES | NOMINAL HEATING (BTU/H) | | | TOTAL WATTS ⁶ | TOTAL AMPS | MIN. CIRCUIT AMPACITY ² | MOP ⁴ (AMPS) | POWER CORD |
|----------|---------------------------|---------------|-------------------------|--------|--------|--------------------------|-------------|------------------------------------|-------------------------|------------|
| | | | @ 230V | @ 208V | @ 265V | | | | | |
| 230/208V | 1.5 / 1.3 | 1 | 5,100 | 4,200 | -- | 1,570 / 1,295 | 6.8 / 6.2 | 8.5 | 15 | 6-15 P |
| 230/208V | 2.5 / 2.1 | 1 | 8,500 | 6,800 | -- | 2,570 / 2,115 | 11.2 / 10.1 | 14.1 | 15 | 6-15 P |
| 230/208V | 3.5 / 3.0 | 1 | 12,000 | 9,900 | -- | 3,570 / 2,935 | 15.5 / 14.1 | 19.5 | 20 | 6-20 P |
| 230/208V | 5.0 / 4.1 | 1 | 17,100 | 14,000 | -- | 5,070 / 4,160 | 22.1 / 20.0 | 27.6 | 30 | 6-30 P |
| 265V | 1.5 | 1 | -- | -- | 5,100 | 1,570 | 5.9 | 7.4 | 15 | 7-20P |
| 265V | 2.5 | 1 | -- | -- | 8,500 | 2,570 | 9.7 | 12.2 | 15 | 7-20 P |
| 265V | 3.7 | 1 | -- | -- | 12,600 | 3,770 | 14.2 | 17.9 | 20 | 7-20 P |
| 265V | 5 | 1 | -- | -- | 17,100 | 5,070 | 19.2 | 23.9 | 25 | 7-30 P |

NOTES

¹ All 265-volt models must use an Amana® brand sub-base (PTSB4**E) or an Amana® brand hard-wire kit (PTPWHWK4).

² Minimum branch circuit ampacity ratings conform to the National Electric Code; however, local codes should apply.

³ Minimum voltage on 230/208-volt models is 197 volts; maximum is 253 volts. Minimum voltage on 265-volt models is 239 volts; maximum is 292 volts.

⁴ Overcurrent protection for all units without electric heaters is 15 amps. Overcurrent protection on 265-volt models must be cartridge-style time-delay fuses (included and factory-installed on all Amana® brand 265-volt chassis).

⁵ Heating capacity and efficiency based on unit operation without condensate pump; unit automatically switches to electric heat at approximately 24°F outdoor ambient.

⁶ Total watts for 15,000 BTU/h models; subtract 20 watts for PT07/09/12

⁷ Specify two-digit heater kW size to complete model number.

⁸ R-410A refrigerant used in all systems.

⁹ All units meet or exceed ASHRAE 90.1 standards.

¹⁰ All units less than 250 volts have a Leak Current Detector Interrupter (LCDI) power cord and meet UL 484 standards.

Product Specifications: PTH Models — Reverse-Cycle Heating Performance

| HEATING CAPACITY ¹ | PTH073G **AXXX | PTH093G **AXXX | PTH123G **AXXX | PTH153G **AXXX | PTH074G **AXXX | PTH094G **AXXX | PTH124G **AXXX | PTH154G **AXXX |
|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Voltage ^{1, 3} | 230 / 208 | 230 / 208 | 230 / 208 | 230 / 208 | 265 | 265 | 265 | 265 |
| BTU/h ⁵ | 6,800 / 6800 | 8,300 / 8,100 | 11,500 / 11,300 | 13,800 / 13,600 | 6,800 | 8,300 | 11,400 | 13,700 |
| Amps ¹⁰ | 3.9 / 3.9 | 4.2 / 4.2 | 5.8 / 5.8 | 7.0 / 7.0 | 3.1 | 3.7 | 5.0 | 6.1 |
| Watts ¹⁰ | 585 / 585 | 715 / 700 | 1085 / 1035 | 1350 / 1330 | 585 | 715 | 1080 | 1340 |
| COP ⁵ | 3.4 / 3.4 | 3.4 / 3.4 | 3.1 / 3.2 | 3.0 / 3.0 | 3.4 | 3.4 | 3.1 | 3.0 |
| CFM (Dry) | 370 | 360 | 370 | 410 | 370 | 360 | 370 | 410 |

COP = Coefficient of Performance; per AHRI Test Procedures, units are rated for capacities and efficiencies.

NOTES

¹ All 265-volt models must use an Amana® brand sub-base (PTSB4**E) or an Amana® brand hard-wire kit (PTPWHWK4).

² Minimum branch circuit ampacity ratings conform to the National Electric Code; however, local codes should apply.

³ Minimum voltage on 230/208-volt models is 197 volts; maximum is 253 volts.

Minimum voltage on 265-volt models is 239 volts; maximum is 292 volts.

⁴ Overcurrent protection for all units without electric heaters is 15 amps. Overcurrent protection on 265-volt models must be cartridge-style time-delay fuses (included and factory-installed on all Amana® brand 265-volt chassis).

⁵ Heating capacity and efficiency based on unit operation without condensate pump; unit automatically switches to electric heat at approximately 24°F outdoor ambient.

⁶ Specify two-digit heater kW size to complete model number.

⁷ R-410A refrigerant used in all systems.

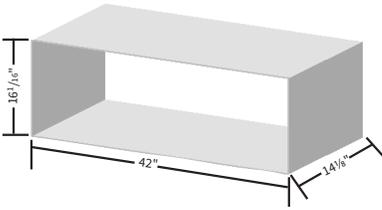
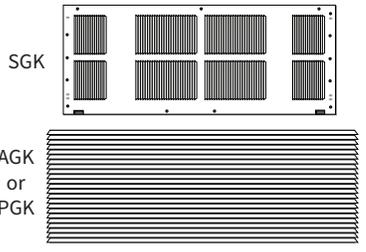

⁸ All units meet or exceed ASHRAE 90.1 standards.

⁹ All units less than 250 volts have a Leak Current Detector Interrupter (LCDI) power cord and meet UL 484 standards.





¹⁰ Refer to electric heat performance data for total MCA and recommended overcurrent protection.

Amps and Watts notation refers to compressor only.






Accessories

| | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---|--|----------------------|--|---|-------------------|--|--|---------|-----------------------------|---------|----------------|---------|----------------|---------|-------------------|-----------------|---|---|-------------|--|
| <p>WALL SLEEVES All our wall sleeves have industry standard dimensions of 42" wide x 16$\frac{1}{8}$" high. The WS900E, SC and INTERNAL 14$\frac{1}{8}$" depth is the industry standard. Sleeves may be shipped separately to allow for installation during construction.</p> <p>STANDARD-DEPTH SLEEVES</p> <table border="1" data-bbox="142 646 646 793"> <tr> <td>WS900E-GS</td> <td>Heavy Sound Isolation Insulation Sleeve</td> </tr> <tr> <td>WS900E</td> <td>Standard PTAC sleeve</td> </tr> <tr> <td>WS900SC</td> <td>Seacoast triple protected</td> </tr> <tr> <td>WS900D-INTERNAL</td> <td>Internal drain only for window-wall installations (DK900D sold separately)</td> </tr> </table> | WS900E-GS | Heavy Sound Isolation Insulation Sleeve | WS900E | Standard PTAC sleeve | WS900SC | Seacoast triple protected | WS900D-INTERNAL | Internal drain only for window-wall installations (DK900D sold separately) | <p>EXTRA DEEP SLEEVES: in several depths for thicker wall installations or special room configurations</p> <table border="1" data-bbox="654 531 1068 741"> <tr> <td>WS9XXD1</td> <td>16" to 24" in 1" increments</td> </tr> <tr> <td>WS928D1</td> <td>Extra deep 28"</td> </tr> <tr> <td>WS930D1</td> <td>Extra deep 30"</td> </tr> <tr> <td>WS936D1</td> <td>Extra deep 36"</td> </tr> <tr> <td>WS9XXD1-Interna</td> <td>Extra deep Internal drain only for window-wall installations (DK900D sold separately)</td> </tr> </table> | WS9XXD1 | 16" to 24" in 1" increments | WS928D1 | Extra deep 28" | WS930D1 | Extra deep 30" | WS936D1 | Extra deep 36" | WS9XXD1-Interna | Extra deep Internal drain only for window-wall installations (DK900D sold separately) |  | | |
| WS900E-GS | Heavy Sound Isolation Insulation Sleeve | | | | | | | | | | | | | | | | | | | | | |
| WS900E | Standard PTAC sleeve | | | | | | | | | | | | | | | | | | | | | |
| WS900SC | Seacoast triple protected | | | | | | | | | | | | | | | | | | | | | |
| WS900D-INTERNAL | Internal drain only for window-wall installations (DK900D sold separately) | | | | | | | | | | | | | | | | | | | | | |
| WS9XXD1 | 16" to 24" in 1" increments | | | | | | | | | | | | | | | | | | | | | |
| WS928D1 | Extra deep 28" | | | | | | | | | | | | | | | | | | | | | |
| WS930D1 | Extra deep 30" | | | | | | | | | | | | | | | | | | | | | |
| WS936D1 | Extra deep 36" | | | | | | | | | | | | | | | | | | | | | |
| WS9XXD1-Interna | Extra deep Internal drain only for window-wall installations (DK900D sold separately) | | | | | | | | | | | | | | | | | | | | | |
| <p>OUTDOOR GRILLES Available in stamped-aluminum or architecturally louvered for application with an Amana brand WS900E wall sleeve.</p> <p>AGK: Extruded aluminum architectural grille available with anodized aluminum finish or a baked-on paint finish for durability. Choose from 3 stock colors or a custom color to blend with your building's exterior color scheme. Colors include: CB (Clear Anodized), DB (Dark Brown/Bronze) TB (Stonewood Beige), WB (White), SB (Special/Custom Colors)</p> <p>PGK: One-piece injection molded grille using a polymer blend of engineered thermoplastic high-impact strength material with chemical resistance and an exterior UV protective coating. Choose from 3 stock colors: DB (Dark Brown/Bronze), TB (Stonewood Beige), WB (White)</p> | <p>STANDARD OUTDOOR GRILLE</p> <table border="1" data-bbox="654 856 1068 930"> <tr> <td>SGK01B</td> <td>Single Pack</td> </tr> <tr> <td>SGK01TB</td> <td>Stonewood Beige</td> </tr> </table> <p>ARCHITECTURAL OUTDOOR GRILLE</p> <table border="1" data-bbox="654 982 1068 1213"> <tr> <td>AGK01CB</td> <td>Anodized Aluminum</td> </tr> <tr> <td>AGK01DB</td> <td>Dark Bronze/Brown</td> </tr> <tr> <td>AGK01TB</td> <td>Stonewood Beige</td> </tr> <tr> <td>AGK01WB</td> <td>Amana White</td> </tr> <tr> <td>AGK01SB</td> <td>Custom Colors</td> </tr> <tr> <td>PGK01DB</td> <td>Dark Bronze/Brown</td> </tr> <tr> <td>PGK01TB</td> <td>Stonewood Beige</td> </tr> <tr> <td>PGK01WB</td> <td>Amana White</td> </tr> </table> | SGK01B | Single Pack | SGK01TB | Stonewood Beige | AGK01CB | Anodized Aluminum | AGK01DB | Dark Bronze/Brown | AGK01TB | Stonewood Beige | AGK01WB | Amana White | AGK01SB | Custom Colors | PGK01DB | Dark Bronze/Brown | PGK01TB | Stonewood Beige | PGK01WB | Amana White |  |
| SGK01B | Single Pack | | | | | | | | | | | | | | | | | | | | | |
| SGK01TB | Stonewood Beige | | | | | | | | | | | | | | | | | | | | | |
| AGK01CB | Anodized Aluminum | | | | | | | | | | | | | | | | | | | | | |
| AGK01DB | Dark Bronze/Brown | | | | | | | | | | | | | | | | | | | | | |
| AGK01TB | Stonewood Beige | | | | | | | | | | | | | | | | | | | | | |
| AGK01WB | Amana White | | | | | | | | | | | | | | | | | | | | | |
| AGK01SB | Custom Colors | | | | | | | | | | | | | | | | | | | | | |
| PGK01DB | Dark Bronze/Brown | | | | | | | | | | | | | | | | | | | | | |
| PGK01TB | Stonewood Beige | | | | | | | | | | | | | | | | | | | | | |
| PGK01WB | Amana White | | | | | | | | | | | | | | | | | | | | | |
| <p>CONDENSATE DRAIN KIT Attaches to the wall sleeve base pan for controlled internal or external disposal of condensate.</p> | <table border="1" data-bbox="654 1308 1068 1423"> <tr> <td>DK900D</td> <td>Condensate Drain Kit (use with WS900E)</td> </tr> <tr> <td>DK9001D</td> <td>Condensate Drain Kit (use with WS900B)</td> </tr> </table> | DK900D | Condensate Drain Kit (use with WS900E) | DK9001D | Condensate Drain Kit (use with WS900B) |  | | | | | | | | | | | | | | | | |
| DK900D | Condensate Drain Kit (use with WS900E) | | | | | | | | | | | | | | | | | | | | | |
| DK9001D | Condensate Drain Kit (use with WS900B) | | | | | | | | | | | | | | | | | | | | | |
| <p>LOW-VOLTAGE WIRE HARNESS KIT (NOT SHOWN) For quick connections of the remote, or wired, thermostats, wired EMS, or front desk with jumpers and connectors.</p> | <table border="1" data-bbox="654 1518 1068 1560"> <tr> <td>PWHK01C</td> <td>Wire Harness Kit</td> </tr> </table> | PWHK01C | Wire Harness Kit | | | | | | | | | | | | | | | | | | | |
| PWHK01C | Wire Harness Kit | | | | | | | | | | | | | | | | | | | | | |
| <p>REMOTE ESCUTCHEON KIT (NOT SHOWN) Optional kit for use with units controlled via a wired, remote thermostat. Covers control touch-pad for wired thermostat installations.</p> | <table border="1" data-bbox="654 1665 1068 1780"> <tr> <td>REK10B</td> <td>Remote Escutcheon Kit (10-pack)</td> </tr> <tr> <td>REK10A</td> <td>Remote Escutcheon Plates</td> </tr> </table> | REK10B | Remote Escutcheon Kit (10-pack) | REK10A | Remote Escutcheon Plates | <p>Each "B" kit contains 80 wires and wire nuts, enough to attach a thermostat and one additional accessory to 10 PTAC units. Wires come in assorted colors for easy attachment. Each "A" kit contains 10 Escutcheon plates only.</p> | | | | | | | | | | | | | | | | |
| REK10B | Remote Escutcheon Kit (10-pack) | | | | | | | | | | | | | | | | | | | | | |
| REK10A | Remote Escutcheon Plates | | | | | | | | | | | | | | | | | | | | | |

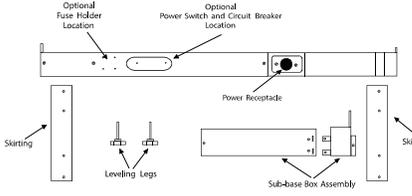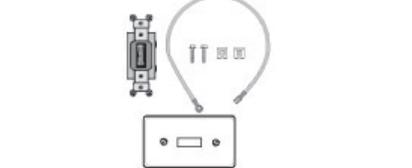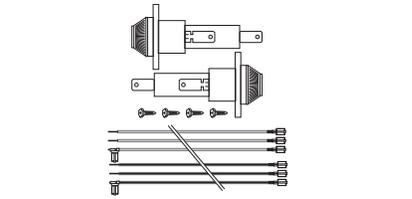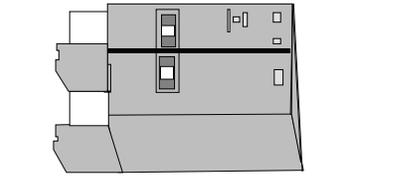Accessories (cont.)

| | | | | | | | | | | | | | | |
|--|---|-----------------|---------------------------------|---|----------------------------|---|-----------------------------|---|-----------------------|-----------------|--------------|-----------------|-----------------------|---|
| <p>SUB-BASE KIT The fully skirted sub-base conceals wiring while providing strong support, if needed. Plug-in receptacle and field-wiring access speeds installation. Electrical accessories, such as fuse holders, circuit breakers and disconnect switches, meet N.E.C. requirements.</p> | <table border="1"> <tbody> <tr> <td>PTSB215E</td> <td>115V/15A</td> </tr> <tr> <td>PTSB320E</td> <td>230/208V 15/20A</td> </tr> <tr> <td>PTSB330E</td> <td>230/208V 30A</td> </tr> <tr> <td>PTSB420E</td> <td>265V 15/20A</td> </tr> <tr> <td>PTSB430E</td> <td>265V 25A</td> </tr> <tr> <td>PTSB000E</td> <td>Non-electrical</td> </tr> </tbody> </table> | PTSB215E | 115V/15A | PTSB320E | 230/208V 15/20A | PTSB330E | 230/208V 30A | PTSB420E | 265V 15/20A | PTSB430E | 265V 25A | PTSB000E | Non-electrical |  |
| PTSB215E | 115V/15A | | | | | | | | | | | | | |
| PTSB320E | 230/208V 15/20A | | | | | | | | | | | | | |
| PTSB330E | 230/208V 30A | | | | | | | | | | | | | |
| PTSB420E | 265V 15/20A | | | | | | | | | | | | | |
| PTSB430E | 265V 25A | | | | | | | | | | | | | |
| PTSB000E | Non-electrical | | | | | | | | | | | | | |
| <p>LEVELING LEGS Gives wall sleeve front support and helps to level the unit for installation.</p> | <table border="1"> <tbody> <tr> <td>LL2B</td> <td>Leveling legs for WS9** sleeves</td> </tr> </tbody> </table> | LL2B | Leveling legs for WS9** sleeves |  | | | | | | | | | | |
| LL2B | Leveling legs for WS9** sleeves | | | | | | | | | | | | | |
| <p>HARD-WIRE KITS Used to permanently wire to the chassis when a standard sub-base and power cord are not utilized. FACTORY INSTALLED Feature Code - W</p> | <table border="1"> <tbody> <tr> <td>PTPWHWK4</td> <td>Armored Cable - all voltages</td> </tr> <tr> <td>PTQC3A</td> <td>Quick Connect - 230/208V</td> </tr> <tr> <td>PTQC4A</td> <td>Quick Connect - 265 & 115 V</td> </tr> </tbody> </table> | PTPWHWK4 | Armored Cable - all voltages | PTQC3A | Quick Connect - 230/208V | PTQC4A | Quick Connect - 265 & 115 V |  | | | | | | |
| PTPWHWK4 | Armored Cable - all voltages | | | | | | | | | | | | | |
| PTQC3A | Quick Connect - 230/208V | | | | | | | | | | | | | |
| PTQC4A | Quick Connect - 265 & 115 V | | | | | | | | | | | | | |
| <p>POWER DISCONNECT SWITCH The PSHW**A power disconnect switch can be used for 265-volt or 230/208-volt physical disconnect, where required by local codes. The switch is rated at 30-amp capacity. The switch is for use with and Amana® brand standard sub-bases or PTPWHWK4 Hard Wire Kit.</p> | <table border="1"> <tbody> <tr> <td>PSHW03A</td> <td>230/208V</td> </tr> <tr> <td>PSHW04A</td> <td>265V</td> </tr> </tbody> </table> | PSHW03A | 230/208V | PSHW04A | 265V |  | | | | | | | | |
| PSHW03A | 230/208V | | | | | | | | | | | | | |
| PSHW04A | 265V | | | | | | | | | | | | | |
| <p>FUSE HOLDER KIT Cartridge-style fuses can be installed in the fuse holder for use in the sub-base or chassis. Available in 15, 20 and 30 amp (included on 265-volt unit).</p> | <table border="1"> <tbody> <tr> <td>FHK315E</td> <td>230/208V 15A</td> </tr> <tr> <td>FHK315E</td> <td>230/208V 15A (R-410A)</td> </tr> <tr> <td>FHK320C</td> <td>230/208V 20A</td> </tr> <tr> <td>FHK320E</td> <td>230/208V 20A (R-410A)</td> </tr> <tr> <td>FHK330C</td> <td>230/208V 30A</td> </tr> <tr> <td>FHK330E</td> <td>230/208V 30A (R-410A)</td> </tr> </tbody> </table> | FHK315E | 230/208V 15A | FHK315E | 230/208V 15A (R-410A) | FHK320C | 230/208V 20A | FHK320E | 230/208V 20A (R-410A) | FHK330C | 230/208V 30A | FHK330E | 230/208V 30A (R-410A) |  |
| FHK315E | 230/208V 15A | | | | | | | | | | | | | |
| FHK315E | 230/208V 15A (R-410A) | | | | | | | | | | | | | |
| FHK320C | 230/208V 20A | | | | | | | | | | | | | |
| FHK320E | 230/208V 20A (R-410A) | | | | | | | | | | | | | |
| FHK330C | 230/208V 30A | | | | | | | | | | | | | |
| FHK330E | 230/208V 30A (R-410A) | | | | | | | | | | | | | |
| <p>CIRCUIT BREAKER KIT (230/208V ONLY) The circuit breaker kit, available in 15, 20 or 30 amp, can be used with Amana brand sub-bases. It gives overcurrent protection, and its location allows you to turn the unit on or off without tools.</p> | <table border="1"> <tbody> <tr> <td>CBK15C</td> <td>15 amp Circuit Breaker Kit</td> </tr> <tr> <td>CBK20C</td> <td>20 amp Circuit Breaker Kit</td> </tr> <tr> <td>CBK30C</td> <td>30 amp Circuit Breaker Kit</td> </tr> </tbody> </table> | CBK15C | 15 amp Circuit Breaker Kit | CBK20C | 20 amp Circuit Breaker Kit | CBK30C | 30 amp Circuit Breaker Kit |  | | | | | | |
| CBK15C | 15 amp Circuit Breaker Kit | | | | | | | | | | | | | |
| CBK20C | 20 amp Circuit Breaker Kit | | | | | | | | | | | | | |
| CBK30C | 30 amp Circuit Breaker Kit | | | | | | | | | | | | | |

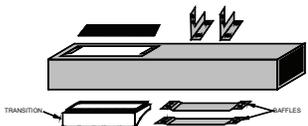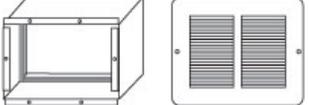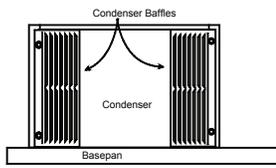Accessories (cont.)

| | | | | | | | | | | | | | | |
|---|---|------------------|--------------------------|---|----------------------------|--|--|---|---------------|---------|-----------------------------|---------|-------------------------------|--|
| <p>DUCT EXTENSION KIT Extends air distribution to an adjoining room. Consists of a main duct for the room of origin and an extension duct to reach the adjoining room and terminal duct. PTDK01A allows for the “B” series unit to work with the “A” series duct kits.</p> <table border="1" data-bbox="134 611 600 695"> <tr> <td>MDK02B</td> <td>Main Duct – R-22</td> </tr> <tr> <td>MDK01E</td> <td>Main Duct – R-410A</td> </tr> <tr> <td>EDK02B</td> <td>42" Extension Duct</td> </tr> </table> | MDK02B | Main Duct – R-22 | MDK01E | Main Duct – R-410A | EDK02B | 42" Extension Duct | <p style="text-align: center;">Main Duct Kit</p>  <table border="1" data-bbox="651 657 1070 747"> <tr> <td>TDK02B</td> <td>Terminal Duct</td> </tr> <tr> <td>PTDK01A</td> <td>Transition Duct Only – R-22</td> </tr> <tr> <td>PTDK01E</td> <td>Transition Duct Only – R-410A</td> </tr> </table> | TDK02B | Terminal Duct | PTDK01A | Transition Duct Only – R-22 | PTDK01E | Transition Duct Only – R-410A | <p style="text-align: center;">Extension Duct Kit</p>  <p style="text-align: center;">Terminal Duct Kit</p>  |
| MDK02B | Main Duct – R-22 | | | | | | | | | | | | | |
| MDK01E | Main Duct – R-410A | | | | | | | | | | | | | |
| EDK02B | 42" Extension Duct | | | | | | | | | | | | | |
| TDK02B | Terminal Duct | | | | | | | | | | | | | |
| PTDK01A | Transition Duct Only – R-22 | | | | | | | | | | | | | |
| PTDK01E | Transition Duct Only – R-410A | | | | | | | | | | | | | |
| <p>POWER VENT KIT Installation of Power Vent increases CFM up to approximately 95. Vent door will automatically close when unit fan is off.</p> <p>FACTORY INSTALLED Feature Code - V R-410A models must have these kits installed at the factory.</p> | <table border="1" data-bbox="651 850 1070 905"> <tr> <td>PVK3A</td> <td>230/208V – R-22</td> </tr> <tr> <td>PVK4A</td> <td>265V – R-22</td> </tr> </table> | PVK3A | 230/208V – R-22 | PVK4A | 265V – R-22 |  | | | | | | | | |
| PVK3A | 230/208V – R-22 | | | | | | | | | | | | | |
| PVK4A | 265V – R-22 | | | | | | | | | | | | | |
| <p>CONDENSER BAFFLE KIT For use on non-baffled grilles. These deflectors direct the air in toward the center and away from the inlet to prevent recirculation of the hot condenser air.</p> | <table border="1" data-bbox="651 1115 1070 1136"> <tr> <td>DGK1B</td> <td>Condenser Baffle Kit</td> </tr> </table> | DGK1B | Condenser Baffle Kit |  | | | | | | | | | | |
| DGK1B | Condenser Baffle Kit | | | | | | | | | | | | | |
| <p>SUB-BASE EXTENSION COVER KIT Converts older 30-amp sub-bases to allow for installation of the larger 30-amp LCDI power cord and plugs.</p> | <table border="1" data-bbox="651 1318 1070 1339"> <tr> <td>SBEC10A</td> <td>10 Pack</td> </tr> </table> | SBEC10A | 10 Pack |  | | | | | | | | | | |
| SBEC10A | 10 Pack | | | | | | | | | | | | | |
| <p>CONDENSATE REMOVAL PUMP Can be field-installed. Assists in removing condensate developed by heat pump operation and transfers it to indoor coil to dissipate into room while adding humidity to the room.</p> <p>FACTORY INSTALLED Feature Code - P</p> | <table border="1" data-bbox="651 1535 1070 1612"> <tr> <td>CDP302</td> <td>230/208V – R-22</td> </tr> <tr> <td>CDP402</td> <td>265V – R-22</td> </tr> <tr> <td>CDP303E</td> <td>230/208V – R-410A</td> </tr> </table> | CDP302 | 230/208V – R-22 | CDP402 | 265V – R-22 | CDP303E | 230/208V – R-410A |  | | | | | | |
| CDP302 | 230/208V – R-22 | | | | | | | | | | | | | |
| CDP402 | 265V – R-22 | | | | | | | | | | | | | |
| CDP303E | 230/208V – R-410A | | | | | | | | | | | | | |
| <p>SECURITY KEY LOCKS In conjunction with the tamper-resistant front, the installation of Amana® brand security key locks prevents tampering of the controls used to set temperature, heating and cooling functions. UL approved for institutional use only.</p> | <table border="1" data-bbox="651 1751 1070 1808"> <tr> <td>KL03B</td> <td>Security Key Lock (R-22)</td> </tr> <tr> <td>KL03E</td> <td>Security Key Lock (R-410A)</td> </tr> </table> | KL03B | Security Key Lock (R-22) | KL03E | Security Key Lock (R-410A) | | | | | | | | | |
| KL03B | Security Key Lock (R-22) | | | | | | | | | | | | | |
| KL03E | Security Key Lock (R-410A) | | | | | | | | | | | | | |

Accessories (cont.)

Thermostats

The following thermostats offer remote control. Any thermostat other than those listed must be submitted to Goodman Company, L.P., for approval prior to use.

| MODEL # | | HEAT STAGES | COOL STAGES | FAN SPEED | # OF WIRES REQUIRED | TEMP LIMITING | BACKLIT | DISPLAY | TYPE | SHAPE & ORIENTATION | CONNECTION |
|---------|---|-------------|-------------|-----------|---------------------|---------------|---------|---------|--------------|---------------------|------------|
| 2246002 |  | 1 | 1 | 1 | 5 | No | Yes | Digital | Manual | Rect./Horiz. | Wired |
| 2246003 |  | 2 | 2 | 2 | 7 | Yes | Yes | Digital | Manual | Rect./Horiz. | Wired |
| 2246007 |  | 2 | 2 | 1 | 7 | Yes | Yes | Digital | Auto-Change | Rect./Horiz. | Wired |
| 2246008 |  | 2 | 2 | 1 | 7 | Yes | Yes | Digital | Programmable | Rect./Horiz. | Wired |
| DS01E* |  | 2 | 2 | 2 | 0 | Yes | Yes | Digital | Manual | Rect./Horiz. | Wireless |


*Battery powered, but has optional hard wire capability. Requires DT01G Antennae for operation

HYDRONIC HEAT KIT

Add-on kits fit all units allowing the addition of hydronic water or hydronic steam heat to cooling and heating units. The kits feature left- or right-hand piping. Unit retains complete service access with a kit installed. Unit must be connected to and operated by a wall thermostat.

| | |
|--------|-----------------------------|
| HWK03B | Hydronic Water Kit – R-22 |
| HVK03B | Hydronic Steam Kit – R-22 |
| HWK03E | Hydronic Water Kit – R-410A |
| HVK03E | Hydronic Steam Kit – R-410A |

Hydronic Heat Kit:
Side View




Hydronic Heat Kit: Top View



Hydronic Heat Kit: Right View



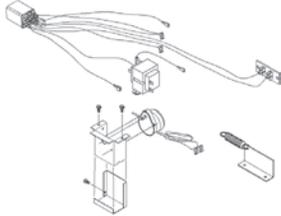Accessories (cont.)

| | | | | | | | | | | | | | | | | | | | | |
|--|---|------------------|---|------------------|--|-----------------|---|-----------------|--|---|--|--------------|-----------------------------|--------------|---|--------------|----------------------------|---------------------|------------------------------|--|
| <p>POWER DOOR KIT Vent door will automatically open when unit fan is on. Factory Installed Feature Code - D</p> | <table border="1"> <tbody> <tr> <td>PDK3A</td> <td>230/208V – R-22</td> </tr> <tr> <td>PDK4A</td> <td>265V – R-22</td> </tr> <tr> <td>PDK3E</td> <td>230/208V – R-410A</td> </tr> <tr> <td>PDK4E</td> <td>265V – R-410A</td> </tr> </tbody> </table> | PDK3A | 230/208V – R-22 | PDK4A | 265V – R-22 | PDK3E | 230/208V – R-410A | PDK4E | 265V – R-410A |  | | | | | | | | | | |
| PDK3A | 230/208V – R-22 | | | | | | | | | | | | | | | | | | | |
| PDK4A | 265V – R-22 | | | | | | | | | | | | | | | | | | | |
| PDK3E | 230/208V – R-410A | | | | | | | | | | | | | | | | | | | |
| PDK4E | 265V – R-410A | | | | | | | | | | | | | | | | | | | |
| <p>HYDRONIC VALVES Water and steam valves are available for use with the HWK03 (water) and HVK03 (steam) heat kits.</p> | <table border="1"> <tbody> <tr> <td>VS2WNCA*</td> <td>2-way/24V/NC/Steam</td> </tr> <tr> <td>VS2WNOA*</td> <td>2-way/24V/NO/Steam</td> </tr> <tr> <td>VW2WNCA*</td> <td>2-way/24V/NC/End Switch</td> </tr> <tr> <td>VW2WNOA*</td> <td>2-way/24V/NO/End Switch</td> </tr> <tr> <td>VW3WNC2B*</td> <td>3-way/24V/NC/NO/End Switch</td> </tr> </tbody> </table> <p>* Poptop Actuator</p> | VS2WNCA* | 2-way/24V/NC/Steam | VS2WNOA* | 2-way/24V/NO/Steam | VW2WNCA* | 2-way/24V/NC/End Switch | VW2WNOA* | 2-way/24V/NO/End Switch | VW3WNC2B* | 3-way/24V/NC/NO/End Switch | | | | | | | | | |
| VS2WNCA* | 2-way/24V/NC/Steam | | | | | | | | | | | | | | | | | | | |
| VS2WNOA* | 2-way/24V/NO/Steam | | | | | | | | | | | | | | | | | | | |
| VW2WNCA* | 2-way/24V/NC/End Switch | | | | | | | | | | | | | | | | | | | |
| VW2WNOA* | 2-way/24V/NO/End Switch | | | | | | | | | | | | | | | | | | | |
| VW3WNC2B* | 3-way/24V/NC/NO/End Switch | | | | | | | | | | | | | | | | | | | |
| <p>WIRELESS RF (RADIO FREQUENCY) CONTROLS All DigiSmart PTACs come factory-ready to be controlled via wireless RF devices. 2.4 Ghz 802.15.4 protocol assures robust communications and response.</p> | <table border="1"> <tbody> <tr> <td>DS01E</td> <td>Thermostat: 2-way² Communications</td> </tr> <tr> <td>DD01E</td> <td>Occupancy Sensor: EMS Activation²</td> </tr> <tr> <td>DT01G</td> <td>Antenna / Router Factory Installed Feature Code - R</td> </tr> <tr> <td>GT01G</td> <td>Generic Radio Antenna / Router³</td> </tr> <tr> <td>DD01F</td> <td>Door Switch: EMS Activation²</td> </tr> <tr> <td>DP01G</td> <td>Web-enabled Platform Server</td> </tr> <tr> <td>DL01G</td> <td>Web-enabled Platform Server Link BAC-NET capable</td> </tr> <tr> <td>DR01G</td> <td>Mesh Repeater¹</td> </tr> <tr> <td>DL01G-SERIAL</td> <td>Serial Repeater¹</td> </tr> </tbody> </table> <p>¹ Consult Amana Sales representative prior to purchase ² Requires DT01G for use ³ Requires DS01E for use</p> | DS01E | Thermostat: 2-way ² Communications | DD01E | Occupancy Sensor: EMS Activation ² | DT01G | Antenna / Router Factory Installed Feature Code - R | GT01G | Generic Radio Antenna / Router ³ | DD01F | Door Switch: EMS Activation ² | DP01G | Web-enabled Platform Server | DL01G | Web-enabled Platform Server Link BAC-NET capable | DR01G | Mesh Repeater ¹ | DL01G-SERIAL | Serial Repeater ¹ |  |
| DS01E | Thermostat: 2-way ² Communications | | | | | | | | | | | | | | | | | | | |
| DD01E | Occupancy Sensor: EMS Activation ² | | | | | | | | | | | | | | | | | | | |
| DT01G | Antenna / Router Factory Installed Feature Code - R | | | | | | | | | | | | | | | | | | | |
| GT01G | Generic Radio Antenna / Router ³ | | | | | | | | | | | | | | | | | | | |
| DD01F | Door Switch: EMS Activation ² | | | | | | | | | | | | | | | | | | | |
| DP01G | Web-enabled Platform Server | | | | | | | | | | | | | | | | | | | |
| DL01G | Web-enabled Platform Server Link BAC-NET capable | | | | | | | | | | | | | | | | | | | |
| DR01G | Mesh Repeater ¹ | | | | | | | | | | | | | | | | | | | |
| DL01G-SERIAL | Serial Repeater ¹ | | | | | | | | | | | | | | | | | | | |
| <p>WALL SLEEVE EXTENSION ADAPTER KITS Room-side extension kits to increase the depth of the existing sleeve to allow for an industry-standard PTAC to be installed.</p> | <table border="1"> <tbody> <tr> <td>SECM1001A</td> <td>1.5" Extension for 12½" Climate Master Sleeve (10 Pack)</td> </tr> <tr> <td>SEZA0501A</td> <td>2.5" Extension for 11½" Zone Air Sleeve (5 pack)</td> </tr> </tbody> </table> | SECM1001A | 1.5" Extension for 12½" Climate Master Sleeve (10 Pack) | SEZA0501A | 2.5" Extension for 11½" Zone Air Sleeve (5 pack) | | | | | | | | | | | | | | | |
| SECM1001A | 1.5" Extension for 12½" Climate Master Sleeve (10 Pack) | | | | | | | | | | | | | | | | | | | |
| SEZA0501A | 2.5" Extension for 11½" Zone Air Sleeve (5 pack) | | | | | | | | | | | | | | | | | | | |
| <p>CURTAIN BAFFLE KIT The color matched polymer curtain baffles help to prevent curtains from falling into the discharge air stream and causing recirculation, reducing efficiencies and shortening compressor life.</p> | <table border="1"> <tbody> <tr> <td>PTCB10B</td> <td>10 Pack for R-22 units</td> </tr> <tr> <td>PTCB10E</td> <td>10 Pack for R-410A units</td> </tr> </tbody> </table> | PTCB10B | 10 Pack for R-22 units | PTCB10E | 10 Pack for R-410A units | | | | | | | | | | | | | | | |
| PTCB10B | 10 Pack for R-22 units | | | | | | | | | | | | | | | | | | | |
| PTCB10E | 10 Pack for R-410A units | | | | | | | | | | | | | | | | | | | |

Framing for Accessory Wall Sleeve (WS9XX)

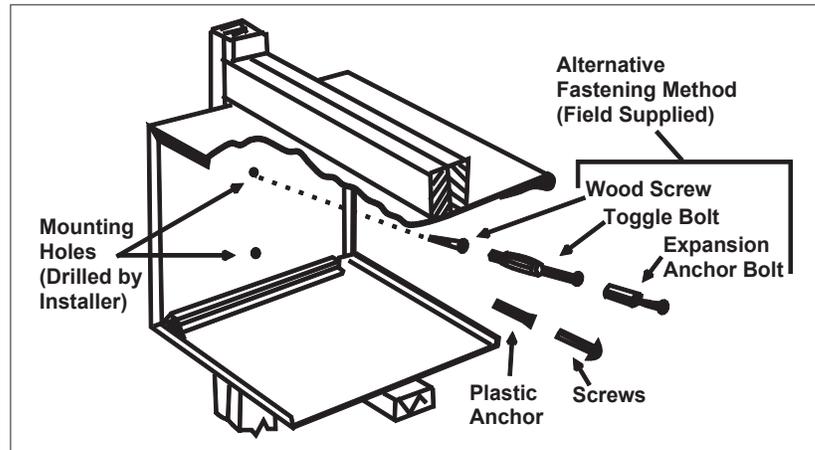
FASTENING WALL SLEEVE

When installed in an opening, the Wall Sleeve must be horizontally level (side-to-side) and pitched $\frac{1}{4}$ bubble to the outside.


(NOTE: To ensure unit's maximum efficiency, **DO NOT** over- or under-pitch.)

INSTALLATION NOTES

1. If **Sub-base** (PTSB***E) is installed, allow minimum $3\frac{1}{4}$ " height clearance and maximum 5" height clearance between wall sleeve and floor; allow minimum $2\frac{3}{4}$ " protrusion from a finished wall. See Note 4 if using hydronic units.
2. **Drain Kit** (DK900D) shipped separately. Can be mounted either right side, left side or bottom of sleeve. If mounted to bottom of sleeve, allow 2" height clearance from floor to bottom of sleeve.
3. For UL approval, 265V units must use Amana® brand **Sub-base** (PTSB***E) or Amana® brand **Hard Wire Kit** (PSHW04A). Overcurrent protection on 265V units must be by cartridge-style time delay fuses, **which are included and factory-installed on the Amana® brand 265V chassis**.
4. If **Hydronic Kit** (HWK03 or HVK03) is installed, **Wall Sleeve** must extend exactly 3" into the room from the finished interior wall. If using the Amana® brand **Sub-base** (PTSB***E), only the minimum $3\frac{1}{4}$ " height clearance between wall sleeve and floor is permissible. Unit must also be operated with a remote-mounted thermostat.
5. If **Duct Kit** (MDK***) is installed, allow a minimum of $2\frac{3}{8}$ " into the room from the finished interior wall.



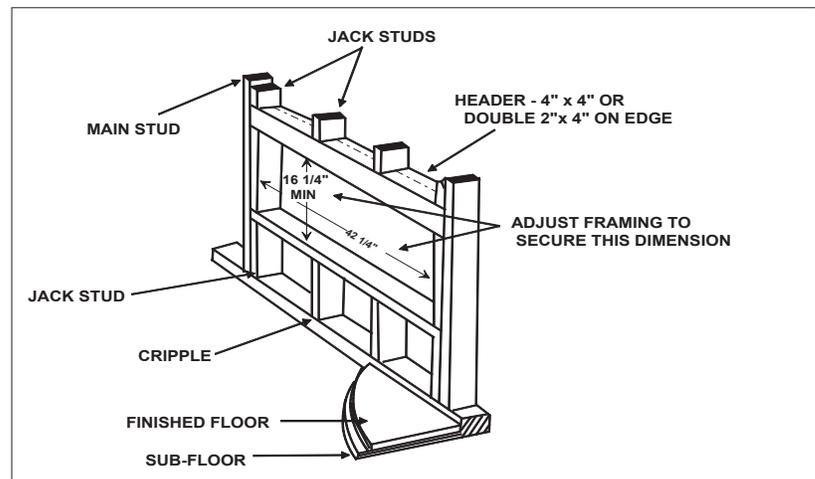Wall Sleeve must extend a minimum of $\frac{1}{4}$ " beyond outside wall to allow for proper caulking.



Wall sleeve opening height should be squared with wall sleeve opening width.

| |
|------------------------|
| H = 16 $\frac{1}{4}$ " |
| W = 42 $\frac{1}{4}$ " |

Wise Decision.
It's an Amana® brand.



Heating & Air Conditioning
Amana®

- Quiet two-fan motor system
- Energy-efficient performance
- DigiSmart® wireless controls on select models



Proudly Assembled in Texas and Tennessee

Our continuing commitment to quality products may mean a change in specifications without notice.
© 2015 Goodman Company, L.P. Amana is a registered trademark of Maytag Corporation or its related companies and is used under license to Goodman Company, L.P., Houston, TX, USA. All rights reserved.



A legacy of comfort
The impeccable reputation of
an American original

Amana heating and cooling systems are a part of the enduring legacy of one of America's most recognized and respected brands. Originating eight decades ago in Amana, Iowa, the brand is synonymous with long-lasting, premium-quality products — from home appliances to heating and air conditioning equipment. Chances are, you and generations before you have enjoyed the dependable performance and longevity the Amana brand continues to deliver.



Proudly Assembled in Texas and Tennessee



Call your Amana brand PTAC sales representative at **800-647-2982** for complete details.

Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer.

www.amana-ptac.com

Our continuing commitment to quality products may mean a change in specifications without notice. © 2015 Goodman Company, L.P. Amana is a registered trademark of Maytag Corporation or its related companies and is used under license to Goodman Company, L.P., Houston, TX, USA. All rights reserved.

MC-DPTAC 07-15
Supersedes 06-15