



Concealed Ducted Unit Spec Sheet


BM12CD

BM18CD




Model		BM12CD	BM18CD
Indoor air flow (Hi/Lo)	CFM	353/283/177	530/450/371
Indoor noise level (Hi/Lo)	dB(A)	38/26/33.5	39/37/35
Dimension(W*D*H)	inch	27.56x17.72x7.87	34.65x28.53x8.27
Packing (W*D*H)	inch	33.86x21.26x10.83	42.13x28.53x10.63
Net/Gross weight	lbs.	37.5/48.3	54/66
Motor Type		DC	DC
Input		130.0	90.0
RLA	A	1.11	1.2
Speed(Hi/Mi/Lo)	RPM	1170/1030/850	850/700/450

BM12CD

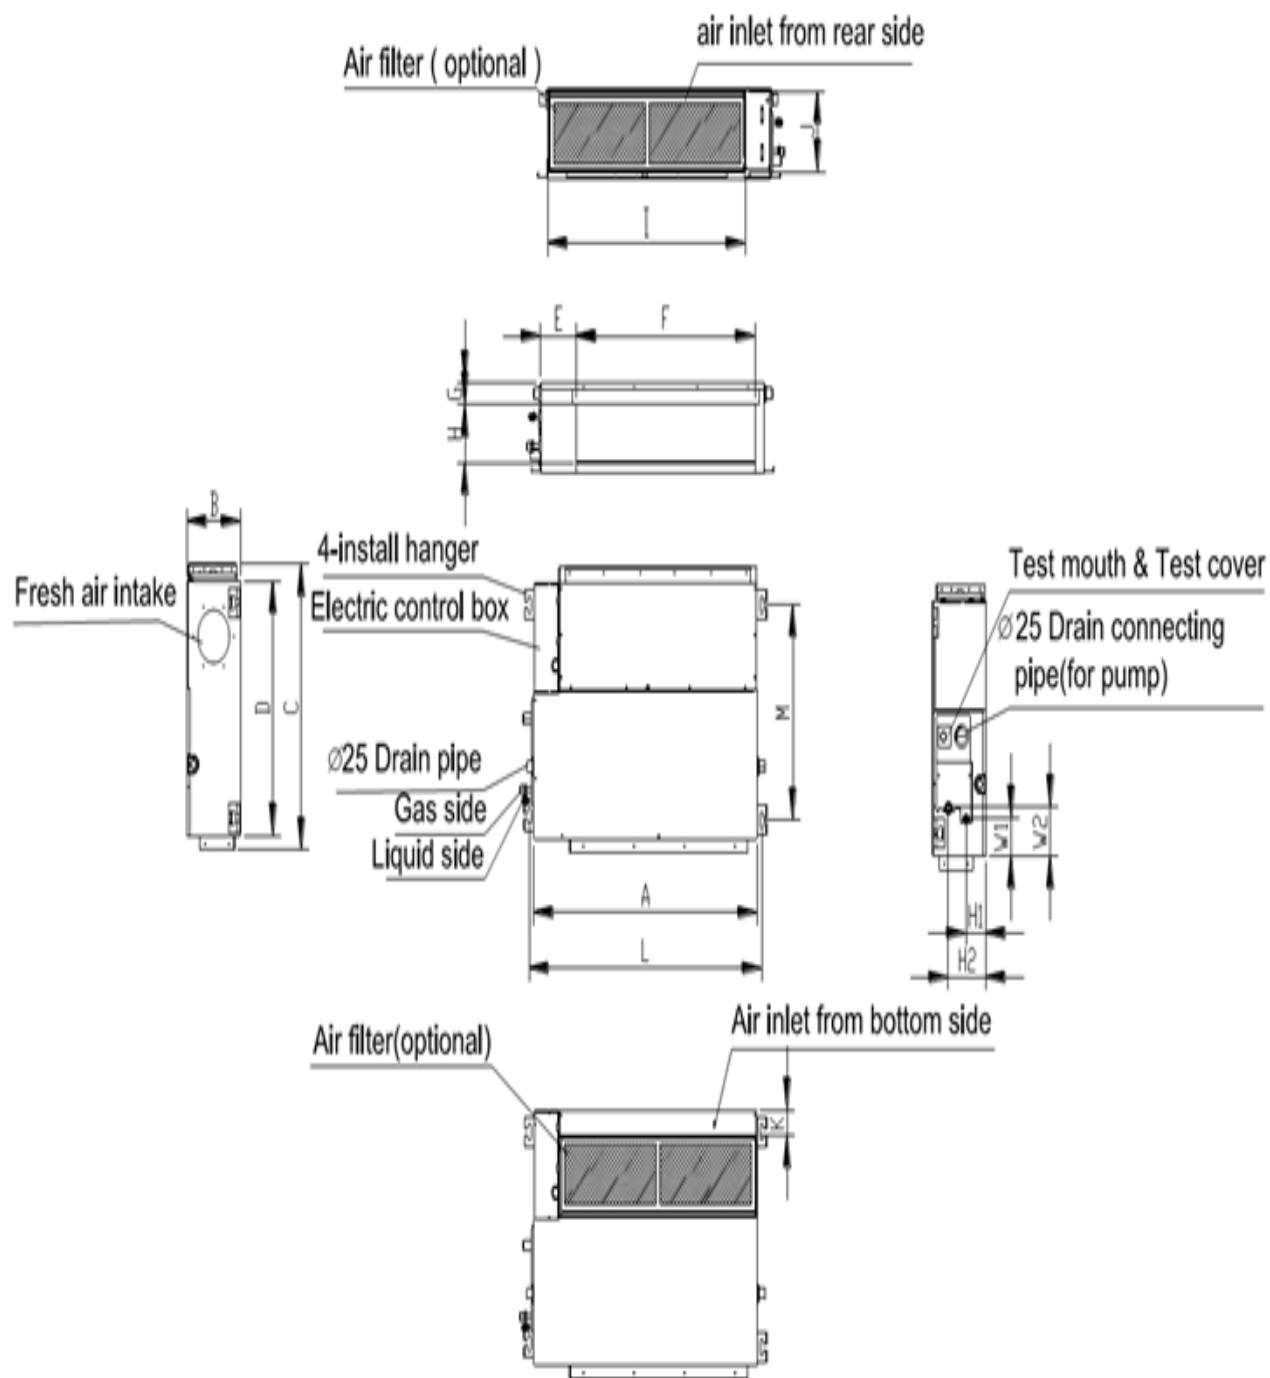

Capacity (Btu)	Outline dimension(mm)				Air outlet opening size				Air return opening size			Size of mounted plug		Size of gas and liquid valve			
	A	B	C	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
12000	700	200	506	450	137	537	30	152	599	186	50	741	360	84	140	84	84

BM18CD

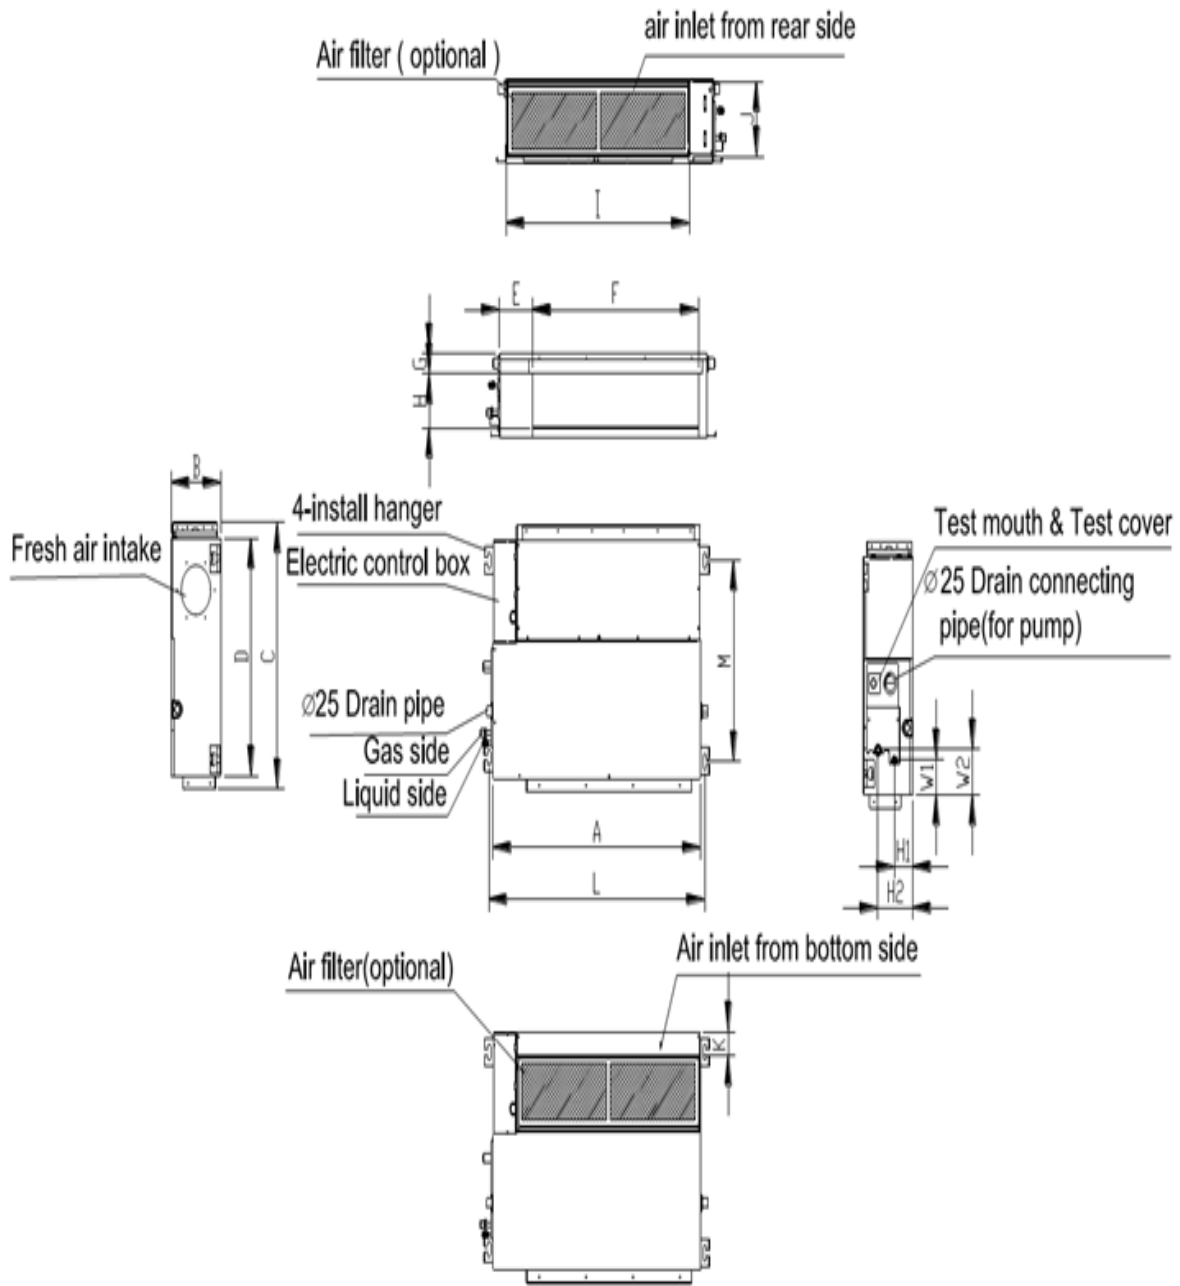

Capacity (Btu)	Outline dimension(mm)				Air outlet opening size				Air return opening size			Size of mounted plug		Size of gas and liquid valve			
	A	B	C	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
18000	880	210	674	600	140	706	50	136	782	190	40	920	508	78	148	88	112