

VNT5200H1000

Ventilation System

SPECIFICATION DATA

VNT5200H Capacities and Performance

Part Number:	VNT5200H1000
Product Weight:	50 lbs (22.68 Kg)
Input Voltage:	120 VAC; 60 Hz.
Input Current:	1.5 A
Output Power to Terminals	5 VDC, 1.0 A
Operating Ranges:	
Temp:	34–135 °F (1.1–57.2 °C)
Humidity:	0–99% RH
CFM:	50–220

Type of Heat Exchanger:	Cross-flow (Polypropylene)
--------------------------------	----------------------------

Exchange Surface:	150 sq. ft.
--------------------------	-------------

Heat Core Dimensions:	
Width:	15 in. (381 mm)
Height:	12 in. (305 mm)
Length:	12 in. (305 mm)

Filter Dimensions:	
Height:	12 in. (305 mm)
Width:	15 in. (381 mm)

Shipping Specs:	
Length:	27.5 in. (698 mm)
Height:	18.4 in. (468 mm)
Width:	25.8 in. (656 mm)
Weight:	57.5 lbs (26.08 Kg)

Defrost Type:	Evacuation
----------------------	------------

Drain Tubing Diameter	1/2 in. (12.7 mm)
------------------------------	-------------------

Flexible Duct (2):
6 in. round for inlet and outlet. Flexible vinyl, compatible for connection to rigid or flexible ducting with sheet metal screws and/or tape.

Cabinet:
20 gauge galvanized steel powder-coat painted.

Certification:
HVI, cCSAus, CSA 22.2 N°113

Conforms to UL Std. 1812.

Install the unit according to National Electric Codes.

For more information call 1-800-468-1502 or visit our website at customer.honeywell.com.



Dimensions and Clearances

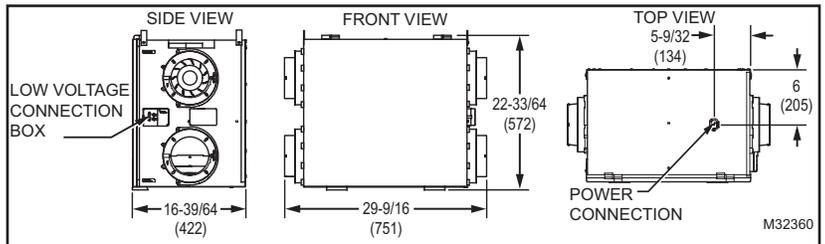


Fig. 1. Dimensions in in. (mm) and clearances.

The Honeywell Ventilation System provides improved indoor air quality through its high performance and efficiency.

Features

- 2 operating modes (Intermittent and Continuous Ventilation)
- Variable speed
- Compact installation
- Sloped drain pan
- Backward inclined motor blades
- Permanent lubrication of PSC motors
- Door opens downward
- No obstruction around the drain pan
- Simple electronic control
- Easy access to the control connection box
- Detachable 6 inch (dia.) collar system
- Proportional defrost
- Speed control balancing system
- Simplified mounting system
- Lifetime limited warranty on the HRV core
- 10-year limited warranty on ventilation motors
- 5-year warranty



Removable Duct Collars

Spend less time on the ladder by easily connecting the duct-work to the collars away from the unit before it's hung, and then sliding the collars back into place once ducted.

Intuitive Balancing


Two variable-speed motors — one for each air stream — work with the integrated speed control so installers can adjust the speed of each motor up and down to easily balance the system. This eliminates the need for adjusting dampers.

Adjustable Hanging Straps

Just like tightening or loosening straps on a backpack, these straps make it easy to raise, lower and level the unit into place


Ventilation Performance VNT5200H

External Static Pressure		Net Supply Air Flow	
Pa	in w.c.	L/s	CFM
25	0.1	117	248
50	0.2	108	229
75	0.3	102	218
100	0.4	94	200
125	0.5	85	181
150	0.6	77	163
175	0.7	69	146

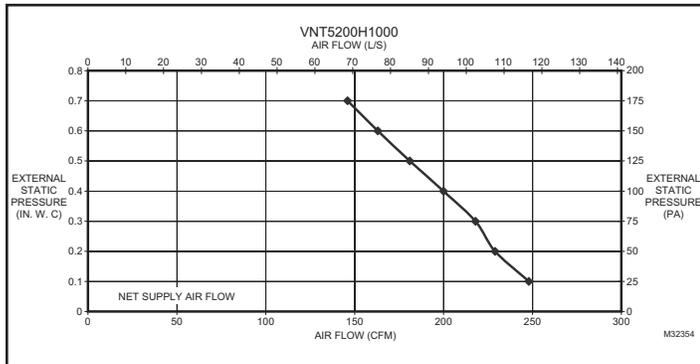

Push Through—Operation System

Outside air is pushed through the heat exchanger, which acts as a noise reducer. This process is very silent and provides you with better home comfort.

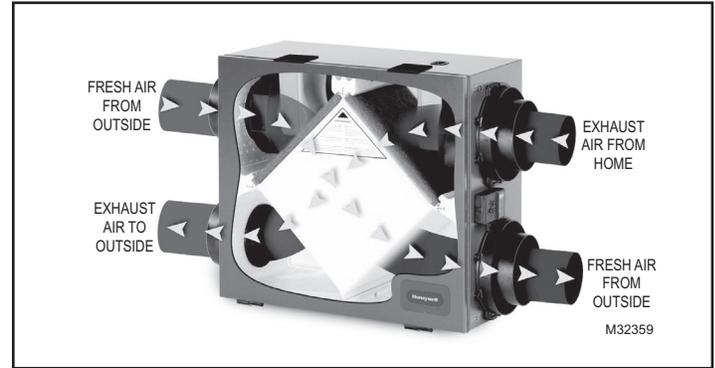

Proportional Defrost—Operation System

The defrost energy is controlled by the outdoor air temperature. The motor speed essentially increases as outdoor temperature drops to provide increased defrost capability.



WARNING: Installation must be performed by a qualified service technician and must comply with local codes. Remove power to the device before installing or servicing the device. Failure to connect the device according to these instructions may result in damage to the device or the controls.

Energy Performance VNT5200H

	Supply Temperature		Net Supply Air Flow		Average Power	Sensible Recovery	Apparent Sensible
	°C	°F	L/s	CFM	Watts	Efficiency (%)	Effectiveness (%)
Heating	0	32	55	118	106	61	71
	0	32	75	160	132	58	65
	0	32	87	185	150	55	62
	-25	-13	57	120	105	58	72

Automation and Control Solutions

Honeywell International Inc.
1985 Douglas Drive North
Golden Valley, MN 55422

Honeywell Limited-Honeywell Limitée
35 Dynamic Drive
Toronto, Ontario M1V 4Z9

<http://customer.honeywell.com>

© U.S. Registered Trademark.
© 2010 Honeywell International Inc.
68-3075EF—01 M.S. 12-10
Printed in U.S.A.

Honeywell