



# **➤** Air exchange

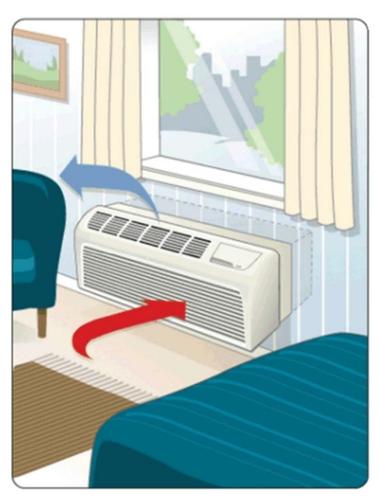


**PTAC-INTERIOR** 

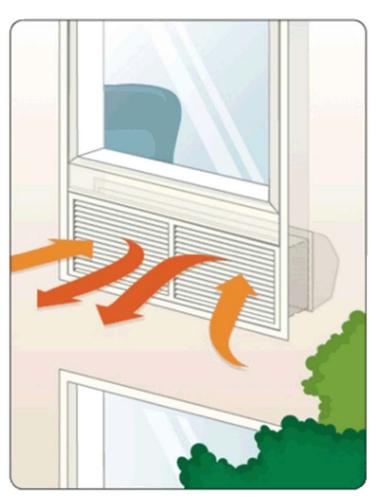

**PTAC-EXTERIOR** 

# **≻** LED Display

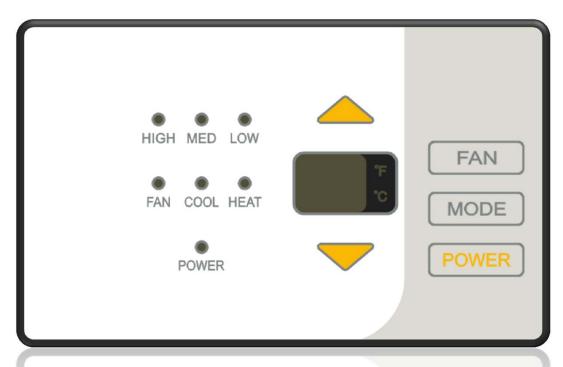

### LED display panel

Default setting

- A)Cooling mode
- B) High Fan speed
- C) Setting temperature 78°F


#### > Auto-Restart





If the air conditioner shuts off unexpectedly due to the power off, it will restart to work under the previous setting mode automatically when the power resumes.

# **➤** Auto-defrosting function

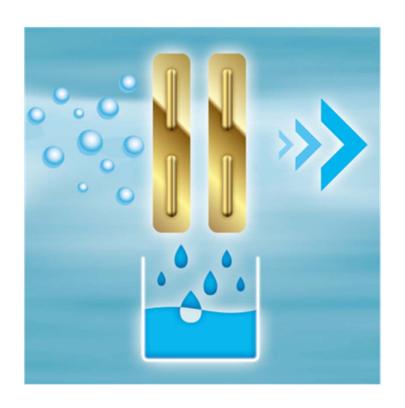



Prevent evaporator from freezing, prolong product life and improve energy saving.

## **➤** Wired control (Optional)

It is a optional function.

With or without Clock, Timer function.

Wire length: 0.85m;

White (default) or silver

Size: 235\*160\*95 mm

#### Wireless controller





24 Voltage Universal controller, Include Wired controller with weekly program (24V control) and wireless controller.

# > Electric heater (Optional)



The PTAC has two different electric heaters:

One is the standard heater, it just has one output capacity, another is optional heater, it has two different output capacity, and it is easy to be change by the power cord.

## **PTAC**

# **→** Health design (Optional)

Large ventilation door: let more fresh air into the room, and make quick air exchange.

open





close

- Normal filter
- Antibacterial filter (Optional)

Filter placed in a position easy to clean



beyond your expectation

# **➤** Accessory (Optional)



**Drain Kit** 



Wall sleeve



Extruded architectural grille



Aluminum grille

# **PTAC**

#### > Features

#### **Standard Features**



Auto Restart Function



Self-evaporative system



Timer

**Optional Features** 



Golden Fin



Easy Cleaned Panel



Fresh Air Ventilation



LED Display


**PTAC** 

## **▶** Product Lineup

: Cooling and Heating

: Cooling and Electric heater

Power supply 7K 9K 12K 15K

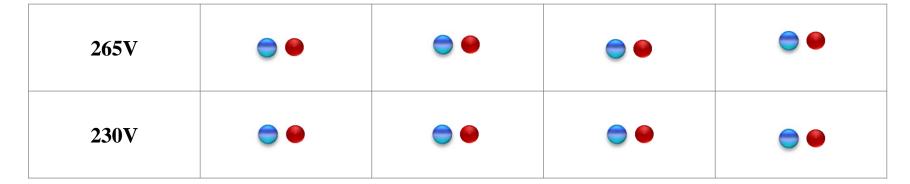

Refrigerant:R410A

