

VENTILATION SOLUTIONS





Ventamatic, Ltd. has been providing ventilation solutions with AN AIR OF EXCELLENCE for over 60 years.

Our MaxxAir product line offers high velocity ventilation designed for home, farm, commercial, and industrial applications. Our Ventamatic and NuVent product lines offer a full range of high quality residential ventilation. Whatever your ventilation requirements may be, Ventamatic, Ltd. has the right product for the job. We also carry a full line of accessories and replacement parts for all our products. For assistance with all your ventilating needs, please phone our Customer Service Department at 1-800-433-1626.



HIGH VELOCITY VENTILATION

Portable Air Circulators	3
Multi-Purpose Fans	4
Pedestal Fans	4
Speciality Fans	5
Heavy Duty Exhaust Fans	5



ROOF AND ATTIC VENTILATION

Solar Powered Roof & Gable Ventilators	6
Power Roof Ventilators	7-8
Power Gable Ventilators	8
Cool Attic Whole House Fans	9
Wind Turbines	10
Static Vents	11



BATH AND KITCHEN VENTILATION

Fans and Fan-Lights	12-14
Designer Series Fan-Lights	12
Fans with Radiation Dampers	14
Heat-Vent-Light Combination Units	15
Bulb Heaters	15



Replacement Parts	15
-------------------	----

**HIGH VELOCITY
AIR MOVEMENT**

MAXXAIR PRODUCTS



MADE IN USA

PORTABLE AIR CIRCULATORS

- Heavy duty 2-speed thermally protected PSC commercial or industrial motors
- Rugged 22-gauge galvanized steel housing
- Non-skid positioning legs
- Convenient handles for portability
- Safe, OSHA compliant grilles
- 8-foot power cord
- C-UL-US listed
- 2-year limited warranty

DIRECT DRIVE SERIES COMMERCIAL FANS

BF36DD 36" Direct Drive

BF30DD 30" Direct Drive



cULus



cULus

BELT DRIVE SERIES INDUSTRIAL FANS

BF42BD 42" Belt Drive

BF36BD 36" Belt Drive



cULus

NEW **48" BELT DRIVE
INDUSTRIAL FAN**



CFM RATINGS FOR MODELS ON THIS PAGE

Model	Description	CFM (high / low)
BF30DD	30" Direct Drive	5500 / 3850
BF36DD	36" Direct Drive	9000 / 6300
BF36BD	36" Belt Drive	10200 / 7300
BF42BD	42" Belt Drive	13300 / 9500
BF48BD	48" Belt Drive	18000 / 10100

BF48BD also available in red.



24" 2N1 TILT / STAND FAN

BF24TF2N1 YEL Tilt Fan (Direct Drive)

Converts from a roll-around floor fan with snap-on snap-off wheels to a 52" stand fan with leg extensions. 4000 (high) / 2800 (low) CFM



Models:

- BF24TF YEL 24" Tilt Fan
- BF25TF2N1YEL 24" 2N1 Tilt/Stand Fan

24" TILT FAN

BF24TF YEL (Direct Drive) Tilt Fan

Same as 2N1 but without leg extensions. 4000 (high) / 2800 (low) CFM

Wall Mount Bracket available for this model. Phone Customer Service at 1.800.433.1626 for details.



NEW



20" HIGH VELOCITY FLOOR FAN

- 3-speed energy efficient PSC motor
- Fan head tilts for versatile use
- Individually balanced fan blades for minimum vibration
- Durable powder-coated finish (RoHS compliant) for ease in cleaning
- 64" power cord has built-in retainer
- 4 non-skid feet for stability
- OSHA compliant grille
- ETL listed
- One-year limited warranty

PEDESTAL FANS

- 3-speed heavy duty motors
- Telescoping poles for maximum versatility
- OSHA compliant rust-resistant grilles
- Two-year limited warranty

TWO MODELS

HVPF 22 OSC
22" Oscillating
Pedestal Fan

HVPF 30
30" Pedestal Fan

Wall Mount Bracket available for HVPF 30. Phone Customer Service at 1.800.433.1626 for details.



Model	CFM (high / med / low)	Fan Head	Pole Telescopes
HVPF 22 OSC	4100 / 3800 / 3500	oscillates 90°	50 in-70 in
HVPF 30	4800 / 4400 / 4100	tilts 90°	60 in-80 in



CARPET/FLOOR FAN

- Heavy duty 3-speed induction motor
- Rugged polymeric housing
- Balanced carry handle
- 30-ft power cord
- 1-year limited warranty

Model	CFM (high / med / low)	AMPS (high / med / low)	HP
HVCF4000	4000 / 3300 / 2500	10.5 / 9.5 / 8.2	1

HOSE ADAPTER KIT FOR HVCF 4000

20 ft (12" diameter) flexible hose with adapter for HVCF 4000 Carpet / Floor Fan

Heavy-duty 2-ply polyvinyl hose with steel support coils and hanger rings



Model: HVCFHOSE KIT



HOSE/AXIAL FAN

Choose from 8" (900 CFM) or 12" (2000 CFM) models

- 2-speed enclosed motor
- outdoor use with GFCI outlet
- direct air flow to limited access areas
- perfect for crawl spaces, attics, basements
- 20 ft flex hose included
- 1-year limited warranty

Models: HVHF08COMBO
HVHF12COMBO

Fans / hoses also sold separately.

HEAVY DUTY EXHAUST FANS

- PSC energy efficient thermally protected motors
- Balanced 4-blade fan assembly
- Integrated, precision formed draft-free shutters

All models may be used with the Adjustable Thermostat with Firestat.™
(Phone 800.433.1626 for details.)

NEW SIZES



Model	CFM	AMPS	Rough-In Opening
IF 14	1400	2.65	17.25" x 17.25"
IF 18	3000	5.34	20.75" x 20.75"
IF 24	4100	4.35	28.25" x 28.25"
IF 30	5500	6.3	34.25" x 34.25"
IF 36	9000	5.1	40.25" x 40.25"



SOLAR POWERED ATTIC VENTILATION

UP TO 1000 CFM ON ALL MODELS !

ROOF MOUNT VENTILATORS (Two Models)



NEW



Model: VX1000SOLDOM

(pictured in mill)

*Includes Solar Panel and
Roof Mount Attic Ventilator*

Solar Panel Mounted on Dome

Great for replacing existing roof mount vents!

OUR ROOF MOUNT VENTS

- 12.6 watt, 18 volt, thermally protected DC motors
- constructed of heavy-duty galvanized steel
- expanded steel mesh grille to protect against birds and rodents
- Available in mill or powder-coated black, brown or weathered grey
- 5-year limited warranty on DC motor

Solar Panel Mounted Separately

Easily customize placement of solar panel for your geographic location!

Model: VX1000SOLAR

(pictured in weathered grey)

*Includes Solar Panel and
Roof Mount Attic Ventilator*



GABLE MOUNT VENTILATOR

OUR GABLE MOUNT VENT

- 12.6 watt, 18 volt, thermally protected DC motor
- shroud constructed of heavy-duty galvanized steel
- mounts behind existing louvers
- 5-year limited warranty on DC motor




Model: VX2515SOLARGABL

Includes Solar Panel and Gable Mount Ventilator

MULTI-CRYSTAL SOLAR PANEL

- 12.6 watt output
- high-impact tempered solar cell casings to resist hail, flying debris and impacting winds
- silicone crystals in anodized aluminum frame
- 25-ft power cord with easy connect clips
- 10-year limited warranty

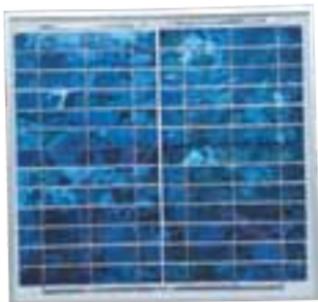

Model: VXSOLARPANEL

Additional solar panels are easily linked and will increase the CFM of your fan.



ROOF MOUNT POWER ATTIC VENTILATORS

- **Rugged and efficient domes**
- **Motors built to last**
- **Proven and reliable construction**
- **Adjustable thermostats**

VXNRG SERIES (1400 CFM)

2.1 amp Energy Efficient PSC Motor

VXNRGAM Series

Galvanized Steel Dome (mill, brown, black, w. grey)
galvanized steel venturi construction

VXNRGAA Series

Duradome® Spun Aluminum (mill, brown, black, w. grey)
aluminum venturi construction

VXSVR SERIES (1600 CFM)

5.1 amp Heavy Duty PSC Motor

VXSVRAM Series

Galvanized Steel Dome (mill, brown, black, w. grey)
galvanized steel venturi construction

VXSVRAA Series

Duradome® Spun Aluminum (mill, brown, black, w. grey)
aluminum venturi construction

VXVIP SERIES (1400 CFM)

VXVIPT Series

ABS Cyclocac® Plastic Dome (grey, brown, black)
galvanized steel venturi construction

VXVIPAM Series

Galvanized Steel Dome (mill, brown, black, w. grey)
galvanized steel venturi construction

VXVIPAA Series

Duradome® Spun Aluminum (mill, brown, black, w. grey)
aluminum venturi construction

Galvanized & Aluminum Dome Colors



Mill



Brown



Black



Weathered Grey

ABS Cyclocac® Plastic Dome



Grey

Model	CFM	Attic Size Sq Ft	Motor AMPS	Fan Size	Intake Sq Inches	Dome* Type	Warranty
VXNRG	1400	2000	2.1 PSC	14"	600	GS, AL	lifetime
VXSVR	1600	2400	5.1 PSC	14"	600	GS, AL	5 yrs
VXVIP	1400	2000	4.5	14"	600	PL, GS, AL	2 yrs
VX2414	1200	1700	3.4	14"	600	PL, GS, AL	2 yrs
VX1000	1080	1600	2.6	14"	600	PL, GS	2 yrs

*Dome Type: PL = ABS Cyclocac® Plastic, GS = Galvanized Steel, AL = Duradome™ Spun Aluminum

VX2414 SERIES (1200 CFM)

VX2414 T Series

ABS Cyclac® Plastic Dome (grey, brown, black)
galvanized steel venturi construction

VX2414 AM Series

Galvanized Steel Dome (mill, brown, black, weathered grey)
galvanized steel venturi construction

VX2414 AA Series (pictured)

Duradome® .040 Spun Aluminum (mill, brown, black, weathered grey)
aluminum venturi construction



VX1000 SERIES (1080 CFM)

VX1000 Series (brown pictured)

ABS Cyclac® Plastic Dome (grey, brown, black)
galvanized steel venturi construction

VX1000 AM Series

Galvanized Steel Dome (mill, brown, black, weathered grey)
galvanized steel venturi construction



GABLE MOUNT POWER ATTIC VENTILATORS

- **Completely preassembled**
- **Easy installation—no holes in roof required**
- **Fits behind existing louvers or order with optional shutter**

3 MODELS WITH THESE FEATURES:

- Precision balanced fan blades
- Engineered motor mount for minimum vibration and extended motor life
- Adjustable thermostat

VX2500 (1650 CFM)

VX2516 (1600 CFM)

VX2515 (1300 CFM)



VX1818 (Optional Shutter)

Fully Automatic Shutter with high impact, one-piece ABS Cyclac® frame. Felt-padded, .020 gauge aluminum louvers for quiet operation. Preassembled.

Be sure to order shutter (below) unless installing behind existing louvers.

Model	CFM	Attic Size Sq Ft	Motor AMPS	Fan Size	Intake Sq Inches	Warranty
VX2500	1650	2500	2.1 PSC	14"	600	lifetime
VX2516	1600	2400	4.5	14"	600	2 yrs
VX2515	1300	1850	2.6	14"	600	2 yrs
VX1818	Automatic Shutter for all fans (22" w x 23" h x 3" d)					



COOL ATTIC WHOLE HOUSE FANS

- **Joist-in or joist-out installation**
- **Belt or direct drive available**
- **5 models for all attics**

CX BD SERIES (Belt Drive)

CX24BD2SPD

24" Belt Drive

CX30BD2SPD

30" Belt Drive


CX36BD2SPD

36" Belt Drive

NEW – BELT DRIVE FANS IMPROVED!!

**Re-engineered bracing technology
virtually eliminates vibration!**

Superior Bracing

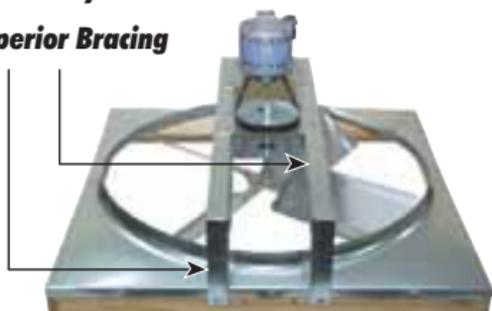

CX DD SERIES (Direct Drive)

CX242DDWT

24" Direct Drive

CX302DDWT

30" Direct Drive

Whole House fans are designed for ceiling mount installations only.

**ALL OUR
WHOLE HOUSE
FANS
HAVE THESE
QUALITY
FEATURES**

- Two-speed, thermally protected PSC motor
- Tough steel motor struts
- Precision-balanced aluminum fan blade assembly
- Four fan blades (unlike 3 in competing brands) for greater air movement
- Joist-in/Joist-out installation
- Steel venturi for enhanced durability
- White automatic shutter (included) has 95% plus air closure
- High/low/off wall switch included
- UL & C-UL Listed
- 10-year limited warranty

Model No.	Square Footage of Area to be Ventilated	CFM High / Low
CX24BD2SPD	up to 1800 sq ft (1 story)	4500 / 3100
CX30BD2SPD	2000 to 3000 sq ft (1 story)	7800 / 5400
CX36BD2SPD	over 3200 sq ft (1 story)	9700 / 6800
CX242DDWT	up to 1800 sq ft (1 story)	4600 / 3200
CX302DDWT	2000 to 3000 sq ft (1 story)	7500 / 5200



WIND TURBINES



- **Can reduce attic temperatures by as much as 50°F in a matter of minutes**
- **Zero energy costs**
- **Choice of internal or external bracing**

PREMIUM SERIES TURBINES

- Premium Aluminum Construction
- Premium Reinforced Bracing
- Premium Grade Stainless Steel ball bearing system
- Adjustable to a 12/12 pitch
- Limited Lifetime warranty

Premium Reinforced Internal Bracing



Premium Reinforced External Bracing



All Premium Series turbines comply with the Texas Department of Insurance's Building Specification for windstorm resistant construction. Also tested and approved by Queensland University.

Internally Braced Turbines



Externally Braced Turbines



mill

black

brown

weathered grey

STANDARD SERIES TURBINES

- Galvanized Steel
- Delrin (co-polymer) bearing system
- Adjustable to a 6/12 pitch
- Available in mill, brown, black, weathered grey

All Standard Series turbines comply with the Texas Department of Insurance's Building Specification for windstorm resistant construction. Constructed to meet or exceed industry specifications and standards.

Model	Description
CX12IBAL	Premium 12" internally braced with base*
CX14IBAL	Premium 14" internally braced with base
CX12EBAL	Premium 12" externally braced with base
<i>(Turbines are available in mill, black, brown or weathered grey. Add MIL (mill), BLK (black), BRN (brown) or WG (weathered grey) to part number.)</i>	
CX12IBGVT	Standard 12" Top Only (internally braced)
CX12IBGV	Standard 12" with base (internally braced)
CX14IBGV	Standard 14" with base (internally braced)
CX12BRGV	Standard 12" Base/Riser Combo, Mill (8-pack)
CX12EBGVT	Standard 12" Top Only (externally braced)
CX12EBGV	Standard 12" with base (externally braced)

All turbines require a minimum 432 sq in of intake ventilation for proper functioning.



STATIC VENTS

- Create constant airflow in the attic
- Save energy costs by reducing strain on heating/cooling systems
- Help prolong shingle life and protect roofing components



EXHAUST VENTS

VX25 SERIES

VX25

144" Net Free Area
Galvanized steel dome (mill, brown, black, weathered grey)

VX25T (not shown)

ABS Cyclac® Plastic Dome (grey)

VX 25 RG (with Rain Guard) (mill, brown, black, weathered grey)



SBV 603 GV SERIES

51" Net Free Area
Galvanized Steel (mill, brown, black)



STV-51 SERIES

51" Net Free Area
Aluminum (mill, brown, black, weathered grey)



SBV 40 SERIES

SBV40

40" Net Free Area
Galvanized steel (brown, black, weathered grey)



STV-51 GV SERIES

51" Net Free Area
Galvanized Steel (mill)



SBV 603 SERIES

51" Net Free Area
Aluminum (mill, brown, black, weathered grey)



SBV 61 SERIES

61" Net Free Area
Polypropylene Plastic (grey, black, brown, weathered grey, cedar, white)



RIDGE VENT

SOR 4

18.3" Net Free Area (per linear ft); 4' continuous length injection-molded polypropylene; (black)



Dade County Approved

Model No.	Description	Base	Opening
VX25, VX25T	Large Round Vent	25" x 25"	15" dia.
VX25RG	Large Round Vent w/ Rain Guard	25" x 25"	15" dia.
SBV 40	Small Galv Slant Back Vent	14" x 16.75"	8.5" dia.
SBV 603, SBV 603 GV	Alum. Slant Back Vent, Galv Slant Back	16" x 20"	8" dia.
STV-51, STV-51 GV	Alum. Square Top Vent, Galv Sq Top	16.5" x 17.5"	8" x 8"
SBV 61	Plastic Slant Back Vent (low profile)	17" x 18"	9" x 9"

INTAKE VENTS

WALL AND GABLE LOUVERS



- SGV88** 8"x8" gable louver
SGV1212 12" x 12" gable louver
SGV1218 12" x 18" gable louver
SGV1418 14" x 18" gable louver
SGV1424 14" x 24" gable louver
SGV1824 18" x 24" gable louver
SWL2430 24" x 30" wall louver

Aluminum. Most louvers available in mill and white.

SOFFIT AND UNDEREAVE VENTS



CX8 Continuous Soffit Vent
Aluminum, 8' lengths



CX64 4" x 16" undereave



CX66 6" x 16" undereave

CX68 8" x 16" undereave

Aluminum (mill, brown, white; CX66 mill only)

MINI VENTS

- MV 1** 1" aluminum (mill) **MV 3** 3" aluminum (mill)
MV 2 2" aluminum (mill) **MV 4** 4" aluminum (mill)





BATH & KITCHEN VENTILATION

- Contemporary Profiles
- Superior Air Movement
- Increased Efficiency
- Easy Installation

NuVent products are C-UL-US Listed and HVI certified.  



Model NXSH80L

SH SERIES

**High Efficiency
Quiet Fans and Fan-Lights**

- High efficiency PSC motors
- Ideal for applications that require continuous operation
- Fluorescent models available



SH Series fans and fan-lights use Universal Housing S2000A

Model	Bath Size	Other Rooms	CFM	Sones	Amps	Watts
NXSH50	45	60	53	0.8	0.30	—
NXSH80	75	100	86	1.3	0.35	—
NXSH110	105	135	114	2.0	0.40	—
NXSH130	120	160	127	2.0	0.40	—
NXSH80L	75	100	86	1.3	1.35	100
NXSH80FL	75	100	86	1.3	1.00	21
NXSH110L	105	135	114	2.0	1.40	100
NXSH110FL	105	135	114	2.0	1.02	21
NXSH130L	120	160	127	2.0	1.40	100

FL denotes fluorescent light.

DESIGNER SERIES

**Sophisticated elegance
and powerful performance
in one design**

- Bright light provided by two 60W incandescent bulbs or two compact fluorescent bulbs (not included)
- Designer frame available in three colors to fit any decor
- Choose from 50, 70, 90, and 110 CFM models (2.5 to 4.5 sones)
- All Designer Series Fan-Lights use NuVent's M2000 Universal Housing™ (fits all models in the NuVent MR and MS Series, pp. 13-14)



NX MD Series

Available in white, antique brass, and oil-rubbed bronze

Ask your Sales Representative for details or phone 1-800-433-1626



Model NXMR90L

MR SERIES

Deluxe Round Grille Fans and Fan-Lights



Model NXMS50L

MS SERIES

Square Grille Fans and Fan-Lights

- **Powerful and quiet**
- **Styled for good looks**
- **Economical choice**
- **Gracefully curved grilles provide efficient airflow**
- **Fluorescent models available**



MR and MS Series fans and fan-lights use Universal Housing M2000A

Model	Bath Size	Other Rooms	CFM	Sones	Amps	Watts
NXMR50	45	60	52	2.0	0.80	—
NXMR70	65	85	70	4.5	0.88	—
NXMR90	85	110	90	3.5	0.55	—
NXMR110	105	135	110	3.5	0.80	—
NXMR70L	65	85	70	4.5	1.88	100
NXMR70FL	65	85	70	4.5	1.40	21
NXMR90L	85	110	90	3.5	1.55	100
NXMR110L	105	135	110	3.5	1.80	100
NXMR110FL	105	135	110	3.5	1.40	21

NXMS50	45	60	52	2.0	0.80	—
NXMS70	65	85	70	4.5	0.88	—
NXMS90	85	110	90	3.5	0.55	—
NXMS110	105	135	110	3.5	0.80	—
NXMS50L	45	60	52	2.0	1.8	100
NXMS70L	65	85	70	4.5	1.88	100
NXMS70FL	65	85	70	4.5	1.40	21
NXMS90L	85	110	90	3.5	1.55	100
NXMS110L	105	135	110	3.5	1.80	100

FL denotes fluorescent light.



Model NX503

CF SERIES

Contractor Fans

- **50 CFM and 70 CFM Models**



All CF Series fans use Universal Housing 503/703A

Model	Description	CFM	Sones	Amp
NX503	50 CFM fan with 3" plastic duct collar	50	4.0	0.90
NX703	70 CFM fan with 3" plastic duct collar	70	5.5	1.80
NX503MTL	50 CFM fan with 3" metal duct collar	50	4.0	0.90
NX703MTL	70 CFM fan with 3" metal duct collar	70	5.5	1.80
NX504	50 CFM fan with 4" plastic duct collar	50	4.0	0.90
NX704	70 CFM fan with 4" plastic duct collar	70	5.5	1.80

Fans with Ceiling Radiation Dampers

*—now available for select
NuVent CF and M Series models*



Hourly-rated floor/ceiling membranes are designed to protect a structure from heat and subsequent potential collapse. Vented fans installed in these assemblies penetrate the fire-resistive membrane. To protect the ducted opening against the spread of heat and fire, many local codes require the installation of a ceiling radiation damper. Installed between the housing and grille, the damper employs an insulation blanket which closes off the opening in an emergency by means of a heat-sensitive fusible link. All NuVent Radiation Dampers meet UL Standard 555C.

NuVent Ceiling Radiation Dampers

- UL tested and labeled (UL Standard 555C) for use in 1-, 2-, and 3-hour floor-ceiling and roof-ceiling constructions
- removeable damper assembly and sleeve to allow easy motor replacement
- UL approved insulation blanket constructed of non-asbestos, high temperature reinforced fiber thermal curtain
- heat sensitive 165°F replaceable fusible link
- .024 galvanized steel frame

CF SERIES (CONTRACTOR) FANS WITH RADIATION DAMPERS

CF Series	Air Delivery	Bath Size	Sones	Amp
503	50 CFM	45 sq ft	4.0	0.90
703	70 CFM	65 sq ft	5.5	1.80

CFRD Dimensions	L	W	H
Radiation Damper	8 1/16"	7 5/8"	3 3/4"
Housing	8 1/16"	7 5/8"	3 3/4"
Assembled Damper/Housing	8 1/16"	7 5/8"	7 1/4"
Grille	10 1/4"	10 1/4"	5/8"

M SERIES FANS WITH RADIATION DAMPERS

M Series	Air Delivery	Bath Size	Sones	Amp
MRD50	52 CFM	60 sq ft	2.0	0.80
MRD70	72 CFM	85 sq ft	4.5	0.88
MRD90	90 CFM	110 sq ft	3.5	0.55
MRD110	110 CFM	135 sq ft	3.5	0.80

MRD Dimensions	L	W	H
Radiation Damper	9 3/8"	9 1/2"	3"
Housing	9 1/4"	9 3/8"	5 5/8"
Assembled Damper/Housing	9 3/8"	9 1/2"	8"
Radiation Damper w/ Light	9 3/8"	9 1/2"	5 3/8"
Grille	12"	12"	5/8"

For more information on NuVent Fans with Radiation Dampers please phone Customer Service at 1-800-433-1626.



Model NXDHVL

DHVL/HVL SERIES

Heat-Vent-Light Combination Units

- **Multiple functions in one easy installation**
- **Directional Heat Discharge™ focuses heat exactly where it's needed (DHVL model only)**



All DHVL/HVL Series units use Universal Housing H2000A

Model	Description	CFM	Sones	Lamp Watts	Element Watts
NXDHVL	heat/vent/light DHD™	72	5.5	100	1400
NXHVL	heat/vent/light	72	5.5	100	1400
NXHV	heat/vent	72	5.5	—	1400



Model NXBV70

BH SERIES

Bulb Heater-Vent

- **Instant heat for the bath**

Model	Description	CFM	Sones	Amps	Lamp Watts
NXBV70	single bulb heater/vent	70	5.5	2.80	250

ACCESSORIES & REPLACEMENT PARTS

We carry a full line of Accessories and Replacement parts for our Ventamatic, Cool Attic, MaxxAir, and NuVent product lines. Please telephone Customer Service at 800.433.1626 for assistance.

Ventamatic, Ltd.
AN AIR OF EXCELLENCE

P.O. Box 728, Mineral Wells, Texas 76068-0728

Telephone 800.433.1626 • Fax 940.325-9311

www.bvc.com

A leader in the ventilation industry for over 60 years, Ventamatic, Ltd. offers a complete line of air movement products for commercial, industrial, agricultural, and residential use sold under these fine names:

Ventamatic

**Cool
Attic**

**MAXX
AIR**

nuVent

***VENTAMATIC, LTD. has provided
the ventilation industry with
AN AIR OF EXCELLENCE for over 60 years.***

***A pioneer in the ventilation industry since
1948, Ventamatic, Ltd. manufactures high
quality air delivery and air movement
products for the residential, commercial,
industrial, and agricultural markets.***

***Based in Mineral Wells, Texas, the
company is an industry leader with a
reputation for quality, value, and
customer satisfaction. Ventamatic, Ltd.
products are sold throughout North
America through retail and wholesale
distributors, home centers, and lumber
and building materials suppliers.***



**P.O. Box 728, Mineral Wells, TX 76068
Phone: 800-433-1626 Fax: 940-325-9311
www.bvc.com e-mail: bvc@bvc.com**