



SRA-HE

Compressor using environmentally friendly R-410A refrigerant

Energy efficient up to 15 SEER

Greater airflow

Reduced dimensions

Built-in low ambient cycling control

Ultra-quiet operation

5 operating modes


Automatic restart function

24-hour programming

A look that will integrate easily to your environment

High Efficiency Wall-Mounted Split A/C Systems

□ 9 000 to 24 000 BTU/H

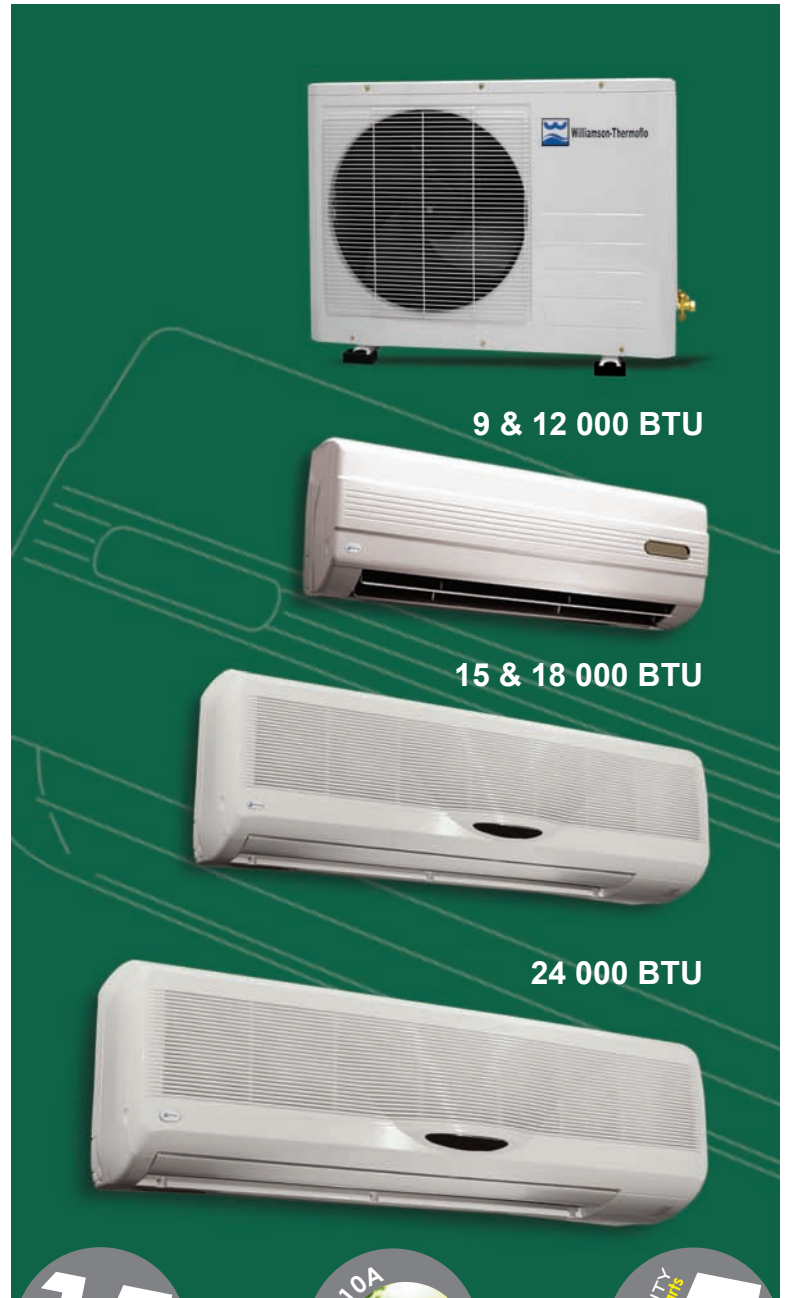

9 & 12 000 BTU

15 & 18 000 BTU

24 000 BTU



Williamson


RATINGS

| MODELS | | | | 9SRA-HE | 12SRA-HE | 15SRA-HE | 18SRA-HE | 24SRA-HE |
|---|--------------------|---------|---------|----------|----------|----------|----------|----------|
| Performance ratings | | | | | | | | |
| Nominal capacity | BTU/h | Cooling | | 9 000 | 12 000 | 15 000 | 18 000 | 24 000 |
| S.E.E.R | BTU/hW | Cooling | | 15 | 13.5 | 14 | 13 | 13 |
| Refrigerant type | | | | R-410A | R-410A | R-410A | R-410A | R-410A |
| Dehumidifying capacity | Pt/H | | | 1.9 | 3.1 | 3.5 | 4.1 | 5.2 |
| Airflow circulation (High) | CFM | | | 382 | 441 | 559 | 647 | 765 |
| Indoor sound rating (High-Medium-Low) | dB(A) | | | 44-40-33 | 45-42-34 | 47-44-40 | 48-44-40 | 52-49-45 |
| Outdoor sound rating | dB(A) | | | 50 | 52 | 55 | 56 | 59 |
| Temperature | Indoor air intake | °F (°C) | Maximum | 95 (35) | 95 (35) | 95 (35) | 95 (35) | 95 (35) |
| | | | Minimum | 64 (18) | 64 (18) | 64 (18) | 64 (18) | 64 (18) |
| | Outdoor air intake | °F (°C) | Maximum | 109 (43) | 109 (43) | 109 (43) | 109 (43) | 109 (43) |
| | | | Minimum | 32 (0) | 32 (0) | 32 (0) | 32 (0) | 32 (0) |
| Electrical data | | | | | | | | |
| Voltage rating | V | | | 115 | 115 | 115 | 208~230 | 208~230 |
| Frequency / Phase | Hz / ϕ | | | 60 / 1 | 60 / 1 | 60 / 1 | 60 / 1 | 60 / 1 |
| Running amperes | A | Cooling | | 7.7 | 10.6 | 10.7 | 7.9 | 10.5 |
| Minimum circuit ampacity | A | | | 15 | 15 | 15 | 15 | 20 |
| Maximum overcurrent protection (Time delay fuse or HACR type circuit breaker) | A | | | 15 | 25 | 25 | 20 | 25 |
| Refrigeration tubing | | | | | | | | |
| Connection method | | | | Flare | Flare | Flare | Flare | Flare |
| Refrigerant tube outer diameter | in. | Liquid | | 1/4 | 1/4 | 1/4 | 1/4 | 3/8 |
| | | Suction | | 1/2 | 1/2 | 1/2 | 5/8 | 5/8 |
| Limit of tubing length | ft. | | | 49 | 49 | 49 | 49 | 49 |
| Limit of elevation difference between the two units | ft. | | | 20 | 20 | 20 | 20 | 20 |

*Note: Design and specifications are subject to change without notice for product improvement.
Comply with ARI STANDARD 210/240.



DIMENSIONS & WEIGHT

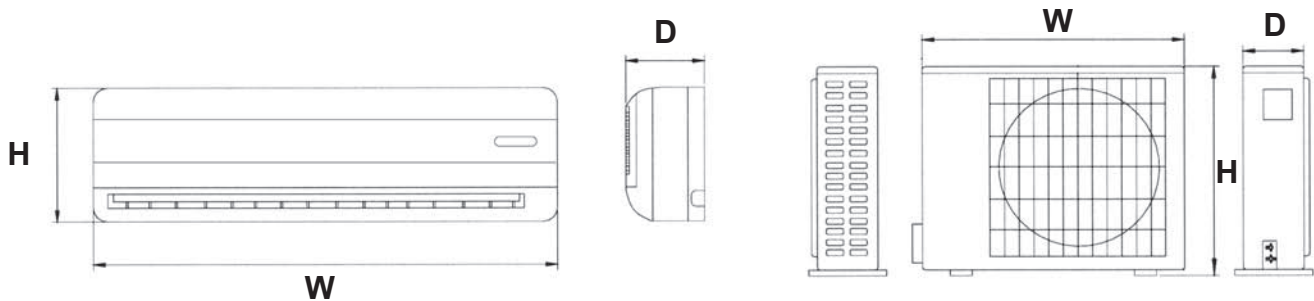

| | | | | | | | | |
|--------------|------------|-----|--------------|--------|--------|----------|--------|--------|
| Indoor unit | Dimensions | in. | Width (W) | 31 1/2 | 31 1/2 | 38 3/4 | 38 3/4 | 42 1/2 |
| | | | Height (H) | 10 7/8 | 10 7/8 | 12 5/8 | 12 5/8 | 13 |
| | | | Depth (D) | 8 1/4 | 8 1/4 | 7 1/2 | 7 1/2 | 9 1/4 |
| Outdoor unit | Dimensions | in. | Width (W) | 31 3/4 | 33 7/8 | 33 7/8 | 37 1/2 | 38 1/4 |
| | | | Height (H) | 23 1/2 | 25 5/8 | 25 5/8 | 33 3/4 | 37 1/2 |
| | | | Depth (D) | 11 1/4 | 12 | 12 | 13 3/4 | 14 1/2 |
| Indoor unit | Weight | lbs | Shipping | 24 | 22 | 33 | 33 | 39 |
| | | | Net | 19 | 19 | 28 | 28 | 35 |
| | | | Outdoor unit | Weight | lbs | Shipping | 92 | 101 |
| Net | 88 | 94 | 94 | | | 119 | 141 | |

EQUIPMENT

- Compressor with R-410A refrigerant
- DC motors with variable speeds
- Built-in low ambient cycling control
- Low and high pressure switches for protection
- Remote control
- Anti-vibration rubber pads
- Compressor sound blanket
- Carbon filters included

WARRANTY

- 5-year limited warranty on parts including compressor
- Optional 5 or 10-year parts and labor warranty



8201 W. Calumet Road • Milwaukee, WI 53223

www.williamson-thermoflo.com Form T-703 (03/07)