


CM SERIES COILS FOR MANUFACTURED HOME PRODUCTS

UNCASED COPPER UPFLOW/DOWNFLOW

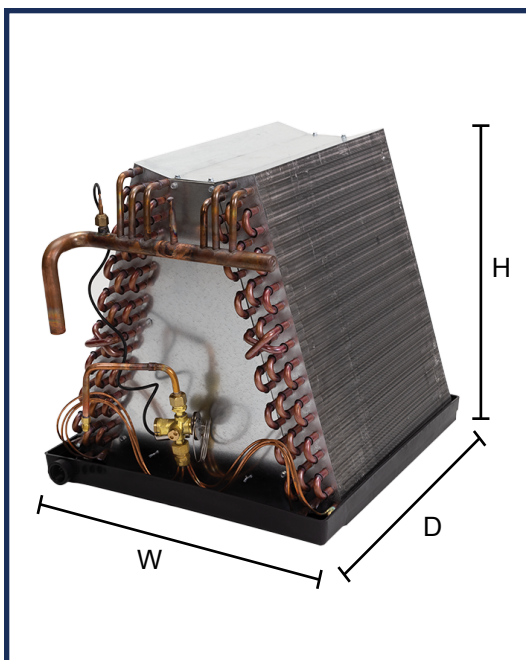

Unit shown with service panels removed.
Representative image only. Some models
may vary in appearance.

STANDARD FEATURES

- Rifled copper tubing, enhanced aluminum fins.
- Downflow plates and manufactured housing drain hose and drain elbow included.
- Immersion tested at 500 psi, followed by nitrogen pressurization and factory sealing to ensure optimal system integrity and long-term reliability.
- Left-hand refrigerant/plumbing connections, with downturn suction line for easy installation in manufactured housing applications. Schrader provided for pressure assurance testing. Refrigerant and plumbing connections:
 - **Liquid line:** 3/8" ODS
 - **Suction line:**
 - ▶ 3/4" ODS on 1-1/2-ton to 3-ton
 - ▶ 7/8" ODS on 3-1/2-ton to 5-ton
 - **Drain connections:**
 - ▶ 195L pans have four (4) drains 3/4" FPT
 - ▶ 177L pans have one (1) LH 3/4" FPT
- Heavy duty polypropylene drain pans.
- AHRI certifiable with all brands of A/C and heat pump systems.
- A2L refrigerants require a Refrigerant Detection System (RDS) for compliance.
- ETL listed for R22 and 410A. ETL listed for R454B and R32 with Refrigerant Detection System (RDS).

WARRANTY

- Ten-year limited warranty with registration.


CM-SS-C-001

HELPFUL LINKS



VIEW PRODUCT ONLINE

For full warranty terms and conditions, please refer to the Warranty Information section on Aspen's official website.



AHRI QUICK MATCH TOOL

Identify the correct AHRI-certified match for any Aspen coil, air handler, or Aspen PRO air handler. Available on the Resources page.



R-410A • R-22 • R-454B • R-32
REFRIGERANT READY
WHEN PROPER METERING DEVICE IS USED



In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Customer Service: info@aspenmfg.com • Warranty Team: warranty@aspenmfg.com • Phone: 281.441.6500 • Toll Free: 800.423.9007 • Fax: 281.441.6510



WWW.ASPENMFG.COM

PERFORMANCE & DIMENSIONAL DATA (In.)											
COIL MODEL	NOM. CAPACITY (BTU)	CONNECTIONS		DIMENSIONS				SHIPPING INFO.			
		LIQ. LINE	SUCT. LINE	DRAIN PAN		COIL ASMBLY HEIGHT	WEIGHT (LBS)			SKID QTY	
				STANDARD WIDTH W"			DEPTH	# OF ROWS			
		OD	OD	17-3/4	19-1/2	D"	H"	2	3	4	
CM24A(2,3)*-177L	24,000	3/8	3/4	17-3/4	-	19-5/8	13-1/2	17	27	--	30
CM24B(2,3)*-177L				17-3/4	-	19-5/8	15-1/2	20	31	-	25
CM24C(2,3)*-177L				17-3/4	-	19-5/8	17-1/2	23	36	-	25
CM24D(2,3)*-177L				17-3/4	-	19-5/8	19-1/2	25	40	-	20
CM30A(2,3)*-177L	30,000	3/8	3/4	17-3/4	-	19-5/8	15-1/2	20	31	-	25
CM30B(2,3)*-177L				17-3/4	-	19-5/8	17-1/2	23	36	-	25
CM30C(2,3)*-177L				17-3/4	-	19-5/8	19-1/2	25	40	-	20
CM36A(2,3,4)*-177L	36,000	3/8	3/4	17-3/4(4)	-	19-5/8	17-1/2	23	36	50	25
CM36B(2,3,4)*-177L				17-3/4(4)	-	19-5/8	19-1/2	25	40	55	20
CM36B4*-195L				-	19-1/2	19-1/2	19-1/2	-	-	55	20
CM36E3*-195L				-	19-1/2	19-1/2	17-1/2	-	36	-	25
CM36E4*-195L				-	19-1/2	19-1/2	26-1/2	-	-	57	25
CM36C34*(2)(5)				-	-	23(2)(5)	26(2)(5)	-	25	-	14
CM42A(2,3,4)*-177L	42,000	3/8	7/8	17-3/4(4)	-	19-5/8	19-1/2	25	40	55	20
CM48A(3,4)*-177L	48,000	3/8	7/8	17-3/4(4)	-	19-5/8	21-1/2	-	45	60	16
CM48B(3,4)*-177L				17-3/4(4)	-	19-5/8	23-1/2	-	49	63	12
CM48C(3,4)*-177L				17-3/4(4)	-	19-5/8	25-1/2	-	54	68	12
CM48D(3,4)*-177L				17-3/4(4)	-	19-5/8	27-1/2	-	58	72	12
CM48E(3,4)*-177L				17-3/4(4)	-	19-5/8	19-1/2	-	40	55	20
CM59A4*-177L	60,000	3/8	7/8	17-3/4(4)	-	19-1/2	19-1/2	-	-	55	20
CM59A4*-195L				-	19-1/2	19-1/2	19-1/2	-	-	55	20
CM60A(3,4)*-195L	60,000	3/8	7/8	-	19-1/2	19-1/2	25-1/2	-	54	70	12
CM60B(3,4)*-195L				-	19-1/2	19-1/2	27-1/2	-	58	76	12

Notes: (1) Do not use plastic drain pans on oil furnaces or other applications where outlet temperature may exceed 290°F +/- 5°F. Metal drain pans are recommended for this type of application. (2) Metal drain pan. (4) Metal drain pan applicable for 4 row coils. (5) Use option code -000 for downflow configuration, -001 for upflow

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Customer Service: info@aspenmfg.com Warranty Team: warranty@aspenmfg.com Phone: 281.441.6500 Toll Free: 800.423.9007 Fax: 281.441.6510