


SUBMITTAL DATA SHEET



BMM12CC2	One Way Cassette
Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____	Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____

Indoor unit code	453091298
Indoor unit model	BMM12CC2
Certified	UL

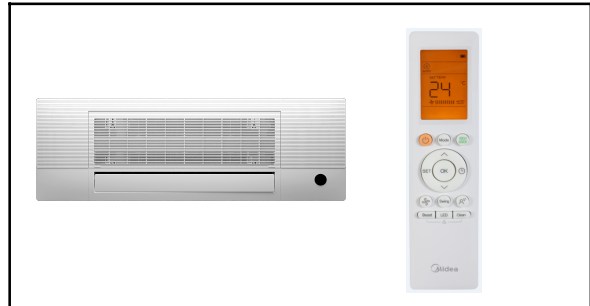

INDOOR UNIT DATA			
Power supply			
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz	
Voltage Range	(V)	187-253	
Indoor fan motor			
Type		Cross-Flow	
Model		ZKFN-30-8-43	
Qty		1	
Input	(W)	/	
Output	(W)	30	
RLA	(A)	1	
Speed(Hi/Mi/Lo)	(r/min)	1075/982/797	

INDOOR UNIT DATA			
Air flow & Noise level			
Indoor air flow (Hi/Med/Lo) (No	(CFM)	311.76/282.35/247.06	
Indoor noise level (Hi/Med/Lo)	[dB(A)]	38.5/37/32.5	
Dehumidification	(Pint/H)	---	
Indoor unit			
Dimension (WxDxH)	(inch)	50.31x13.19x8.98	
	(mm)	1278x335x228	
Packing(WxDxH)	(inch)	57.60x22.48x22.64	
	(mm)	1463x571x575	
Net/Gross weight	(lbs.)	45.19/82.89	
	(kg)	20.5/37.6	
Liquid side/ Gas side	(inch)	1/4" / 1/2"	
	(mm)	6.35/12.7	

