

SUBMITTAL DATA SHEET



BMM12WM

Wall Mounted Heat Pump Air Handlers

Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Approval: _____
 Date: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____

Indoor unit code 453083716

Indoor unit model BMM12WM

Certified **UL** **US**
 LISTED



INDOOR UNIT DATA

Power supply

Normal Operational Voltage (V, Ph, Hz) 208/230, 1, 60
 Voltage Range (V) 187-253

Indoor fan motor

Type Cross-Flow
 Model ZKFP-13-8-4
 Qty 1
 Input (W) -
 RLA (A) -
 LRA (A) -
 Winding Resistance (Ω) -
 Capacitor (uF) -
 Speed(Hi/Mi/Lo) (r/min) 1250/950/750

INDOOR UNIT DATA

Air flow & Noise level

Indoor air flow (Hi/Med/Lo) (CFM) 291.18/194.12/152.94
 Indoor noise level (Hi/Med/Lo) [dB(A)] 41.5/36/24

Dehumidification

(Pint/H) ---

Indoor unit

Dimension (WxDxH) (inch) 31.57x7.87x11.61
 (mm) 802x200x295
 Packing(WxDxH) (inch) 34.45x11.22x14.96
 (mm) 875x285x380
 Net/Gross weight (lbs.) 18.74/24.25
 (kg) 8.5/11


Liquid side/ Gas side (inch) 1/4" / 1/2"

(mm) Φ6.35 / Φ12.7

Application area (sq.ft) 172.22 ~ 247.57

(m2) 16 ~ 23

Indoor unit dimension

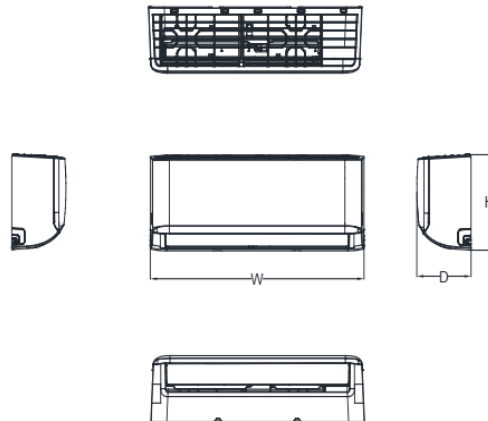

Capacity	Body Code	W(mm/inch)	D(mm/inch)	H(mm/inch)
6K~11K	A	729/28.7	200/7.87	292/11.5
8K~14K	B	802/31.57	200/7.87	295/11.61
12K~21K	C	971/38.23	228/8.98	321/12.64
18K~28K	D	1082/42.6	234/9.21	337/13.27
27K~36K	F	1259/49.57	283/11.14	362/14.25