


# SUBMITTAL DATA SHEET



BMM16LW	New Console
Location: _____	Approval: _____
Engineer: _____	Date: _____
Submitted to: _____	Construction: _____
Submitted by: _____	Unit #: _____
Reference: _____	Drawing #: _____

Indoor unit code	453091302
Indoor unit model	BMM16LW
Certified	UL  US

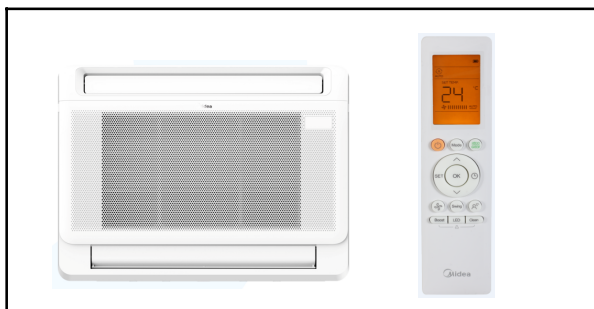

INDOOR UNIT DATA			
<b>Power supply</b>			
Normal Operational Voltage	(V, Ph, Hz)	208-230V,1Ph,60Hz	
Voltage Range	(V)	187-253	
<b>Indoor fan motor 1</b>			
Type		Cross-Flow	
Model		ZKFP-13-8-136	
Qty		1	
Input	(W)	/	
Output	(W)	13	
RLA	(A)	1.03	
Speed(Hi/Mi/Lo)	(r/min)	1100/1000/900	
<b>Indoor fan motor 2</b>			
Type		Cross-Flow	
Model		ZKFP-13-8-104	
Qty		1	
Input	(W)	/	
Output	(W)	13	
RLA	(A)	1.03	
Speed(Hi/Mi/Lo)	(r/min)	1100/1000/900	

INDOOR UNIT DATA			
<b>Air flow &amp; Noise level</b>			
Indoor air flow (Hi/Med/Lo)	(CFM)	441.18/382.35/323.53	
Indoor noise level (Hi/Med/Lo)	[dB(A)]	45/43.5/30.5	
<b>Dehumidification</b>			
	(Pint/H)	---	
<b>Indoor unit</b>			
Dimension (WxDxH)	(inch)	31.26x7.87x24.45	
	(mm)	794x200x621	
Packing(WxDxH)	(inch)	34.06x11.02x28.31	
	(mm)	865x280x719	
Net/Gross weight	(lbs.)	32.85/41.45	
	(kg)	14.9/18.8	
Liquid side/ Gas side	(inch)	1/4" / 1/2"	
	(mm)	6.35/12.7	

