

SUBMITTAL DATA SHEET

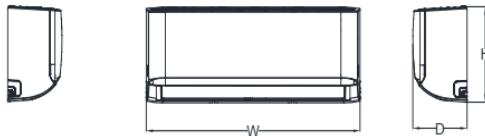
BMM6WM	Wall Mounted Heat Pump Air Handlers
Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____	Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____

Indoor unit code	453087899
Indoor unit model	BMM6WM
Certified	UL 



INDOOR UNIT DATA			
Power supply			
Normal Operational Voltage	(V, Ph, Hz)	208/230, 1, 60	
Voltage Range	(V)	187-253	
Indoor fan motor			
Type		Cross-Flow	
Model		ZKFP-13-8-4	
Qty		1	
Input	(W)	-	
RLA	(A)	-	
LRA	(A)	-	
Winding Resistance	(Ω)	-	
Capacitor	(uF)	-	
Speed(Hi/Mi/Lo)	(r/min)	1100/810/690	

INDOOR UNIT DATA			
Air flow & Noise level			
Indoor air flow (Hi/Med/Lo)	(CFM)	247.06/176.47/141.18	
Indoor noise level (Hi/Med/Lo)	[dB(A)]	38.5/33/20.5	
Dehumidification	(Pint/H)	---	
Indoor unit			
Dimension (WxDxH)	(inch)	28.70x7.87x11.50	
	(mm)	729x200x292	
Packing(WxDxH)	(inch)	31.10x10.63x14.76	
	(mm)	790x270x375	
Net/Gross weight	(lbs.)	17.64/22.49	
	(kg)	8.0/10.2	
Liquid side/ Gas side	(inch)	1/4" / 3/8"	
	(mm)	Φ6.35 / Φ9.52	
Application area	(sq.ft)	86.11~129.17	
	(m2)	8~12	

Indoor unit dimension					
					
					
					
Capacity	Body Code	W(mm/inch)	D(mm/inch)	H(mm/inch)	
6K~11K	A	729/28.7	200/7.87	292/11.5	
8K~14K	B	802/31.57	200/7.87	295/11.61	
12K~21K	C	971/38.23	228/8.98	321/12.64	
18K~28K	D	1082/42.6	234/9.21	337/13.27	
27K~36K	F	1259/49.57	283/11.14	362/14.25	