


SUBMITTAL DATA SHEET



BMY3020WM	Wall Mounted Heat Pump Air Handlers
Location: _____	Approval: _____
Engineer: _____	Date: _____
Submitted to: _____	Construction: _____
Submitted by: _____	Unit #: _____
Reference: _____	Drawing #: _____

Indoor unit code	453083704
Indoor unit model	BMY3020WM
Certified	UL US LISTED

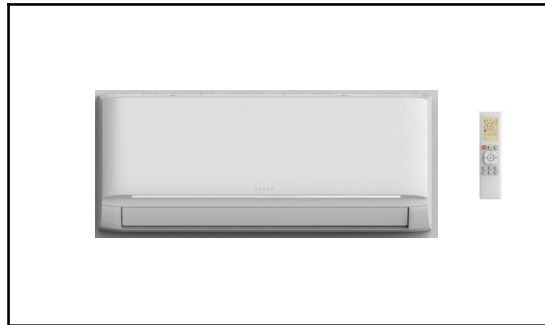

INDOOR UNIT DATA			
Power supply			
Normal Operational Voltage	(V, Ph, Hz)	208/230, 1, 60	
Voltage Range	(V)	187-253	
Indoor fan motor			
Type		Cross-Flow	
Model		ZKFP-58-8-1-5	
Qty		1	
Input	(W)	58.0	
RLA	(A)	-	
LRA	(A)	-	
Winding Resistance	(Ω)	-	
Capacitor	(uF)	-	
Speed(Hi/Mi/Lo)	(r/min)	1200/1050/950	

INDOOR UNIT DATA			
Air flow & Noise level			
Indoor air flow (Hi/Med/Lo)	(CFM)	1193/911/646	
Indoor noise level (Hi/Med/Lo)	[dB(A)]	49.5/43.5/39.5	
Dehumidification	(Pint/H)	---	
Indoor unit			
Dimension (WxDxH)	(inch)	49.57x11.14x14.25	
	(mm)	1259x283x362	
Packing(WxDxH)	(inch)	52.76x17.72x15.16	
	(mm)	1340x450x385	
Net/Gross weight	(lbs.)	42.99/55.56	
	(kg)	19.5/25.2	
Liquid side/ Gas side	(inch)	3/8" / 5/8"	
	(mm)	Φ9.52 / Φ15.9	
Application area	(sq.ft)	430.56~635.07	
	(m2)	40~59	

Indoor unit dimension					
Capacity	Body Code	W(mm/inch)	D(mm/inch)	H(mm/inch)	
6K~11K	A	729/28.7	200/7.87	292/11.5	
8K~14K	B	802/31.57	200/7.87	295/11.61	
12K~21K	C	971/38.23	228/8.98	321/12.64	
18K~28K	D	1082/42.6	234/9.21	337/13.27	
27K~36K	F	1259/49.57	283/11.14	362/14.25	

