SUBMITTAL DATA SHEET

Air Handler Heat Pump System BNG3A60UCN-60END	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:





INDOOR SPECIFICATION		
Dimension (W×D×H)	inch	24-1/2 x 21 x 28
	mm	622 × 533 × 711
Package (W×D×H)	inch	27-3/4 x 26-1/8 x 30-3/8
	mm	705 × 665 × 770
Net/Gross Weight	lbs	81 / 92
	kg	36.8 / 41.9

OUTDOOR SPECIFICATION		
Compressor Type		TWIN-ROTARY
Compressor Model		ETPQ480D66UMU1
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1300
Refrigerant Oil		VG75
Outdoor Air Flow (Max) (CFM)		2,649
Outdoor Noise Level (dBA)		64
Dimension (W×D×H)	inch	37-1/2 x 16-3/8 x 52-1/2
	mm	952 × 415 × 1333
Package (W×D×H)	inch	43-1/8 x 19-1/2 x 58-1/4
	mm	1095 × 495 × 1480
Net/Gross Weight	lbs	242 / 275
	kg	110.2 / 124.8

EFFICIENCY			
Cooling		Heating	
SEER2	14.5	HSPF2-4	8.1
EER2	8.8	COP	2.76


PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	53000
Min/Max Capacity	17,600~53,400
Moisture Removal(L/h)	8.5
Standard Operating Range(℉/℃)	-22~122(-30~50)
Rated Cooling Conditions:	Indoor: 80℉ DB/67℉ WB
	Outdoor: 95℉ DB/75℉ WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47℉ Rated	58,000
2. @ 47℉ Min/Max Capacity	21,200~59,000
3. @ 17℉ Rated	36,000
4. @ 5℉ Rated: Capacity / COP	43000/1.83
5. @ 5℉ Max: Capacity	43,000
Standard Operating Range(℉/℃)	-22~75(-30~24)
1. Rated Heating Conditions:	Indoor: 70℉ DB/60℉ WB
	Outdoor: 47℉ DB/43℉ WB
2. Rated Heating Conditions:	Indoor: 70℉ DB/60℉ WB
	Outdoor: 17℉ DB/15℉ WB
3. Heating Conditions, Compressor	Indoor: 70℉ DB/60℉ WB
Operating at Max. Frequency	Outdoor: 5℉ DB/5℉ WB

ELECTRICAL	
Indoor Power Supply	24V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	/
Indoor MOP	/
Outdoor Power Supply	208/230,60Hz,1Ph
Outdoor MCA	40
Outdoor MOP	40
Communication Wiring	AWG 20-2
Compressor RLA	31
Outdoor Fan Motor RLA	1.2
Outdoor Fan Motor W	/
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	6020(1,520 ~ 6,040)
System Power Input @ Heating (W)	6,159(1,580 ~6,750)
MCA: Min. circuit amps (A)	**MOCP: Max. over current protection (A)**
RLA: Rated load amps (A)	**W: Fan motor rated output (W)**


PIPING	
Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	246(75)
Max. Height Difference(ft/m)	98(30)
Max. Pre-charged Length(ft)	25
Refrigerant Pre-charged Amount(oz/kg)	183.42(5.2)
Additional Charge of Refrigerant((oz/ft)/(g/m)	0.7(65)
Connection Method	Flared

Indoor Unit Dimension

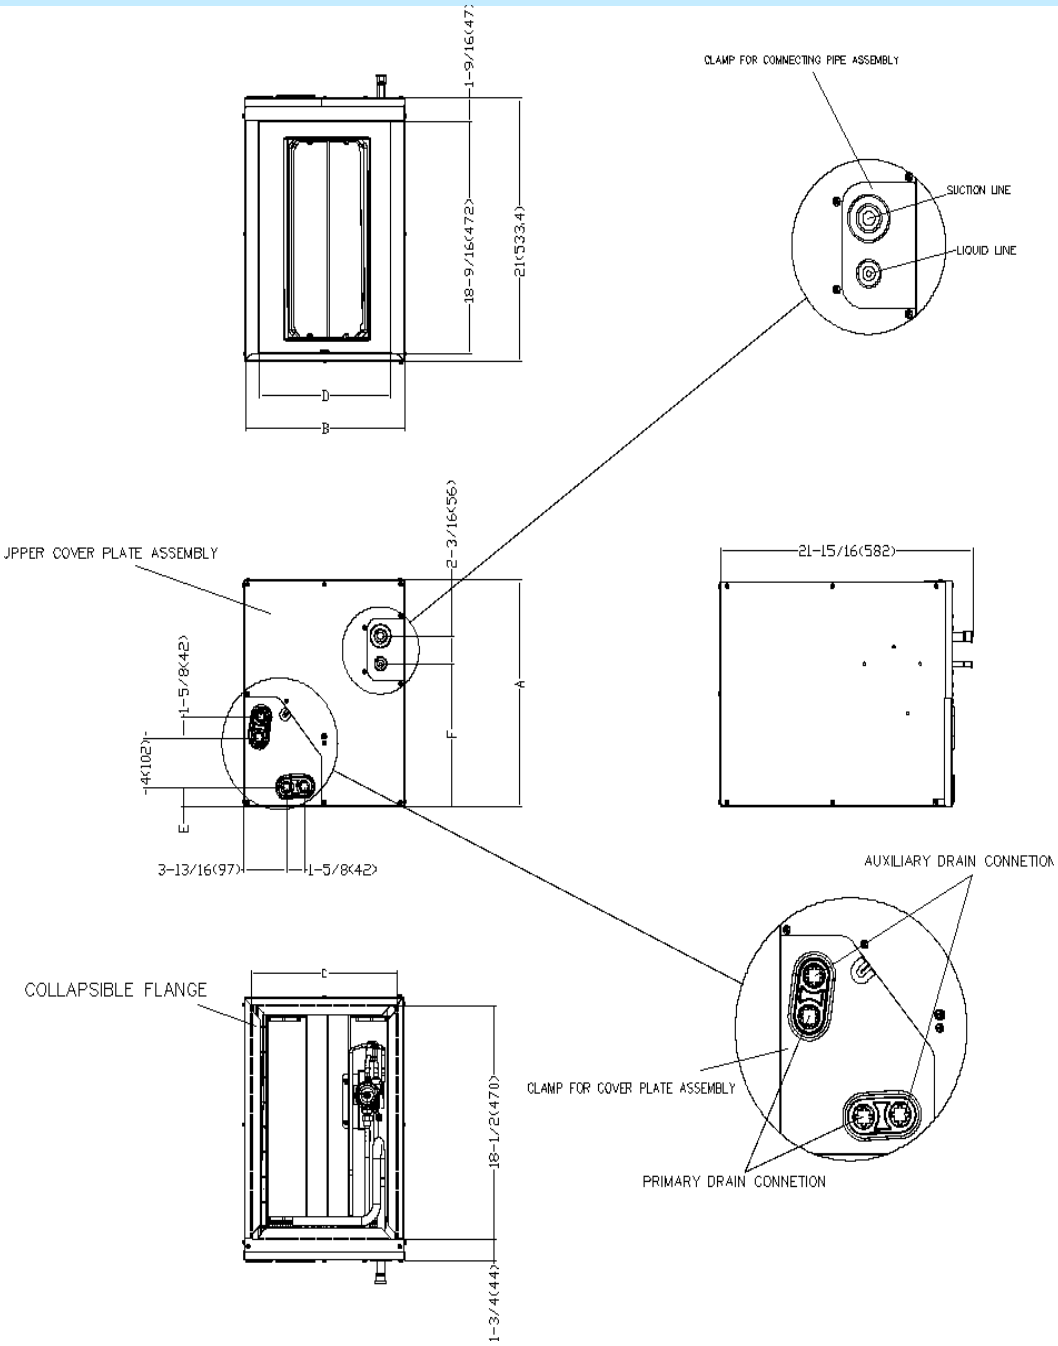


Dimensions / Model		MVBM-24B18T3N10		MVBM-24A18T3N10		MVBM-36A24T4N10		MVBM-36B24T4N10		MVBM-36C24T4N10		MVBM-60D28T6N10	
		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
A	Model Height	18	457	18	457	23-5/16	592	23-9/16	599	24	611	28	711
B	Model Width	17-1/2	445	14-1/2	368	14-1/2	368	17-1/2	445	21	534	24-1/2	622
C	Supply Air Opening Width	16-3/16	411	13-1/4	336	13-1/4	336	16-3/16	411	19-3/4	502	23-1/4	591
D	Return Air Opening Width	14-15/16	380	11-15/16	303	11-15/16	303	14-15/16	380	19-1/2	498	23-1/8	587
E	Condensate Drains Height	1-7/16	1-7/16	1-7/16	38	1-7/16	38	1-7/16	38	2-3/16	55	2-3/16	55
F	Liquid Line Height	11-3/8	290	11-3/8	290	17-15/16	455	16-3/8	417	17-1/2	445	21-7/16	545

Outdoor Unit Dimension

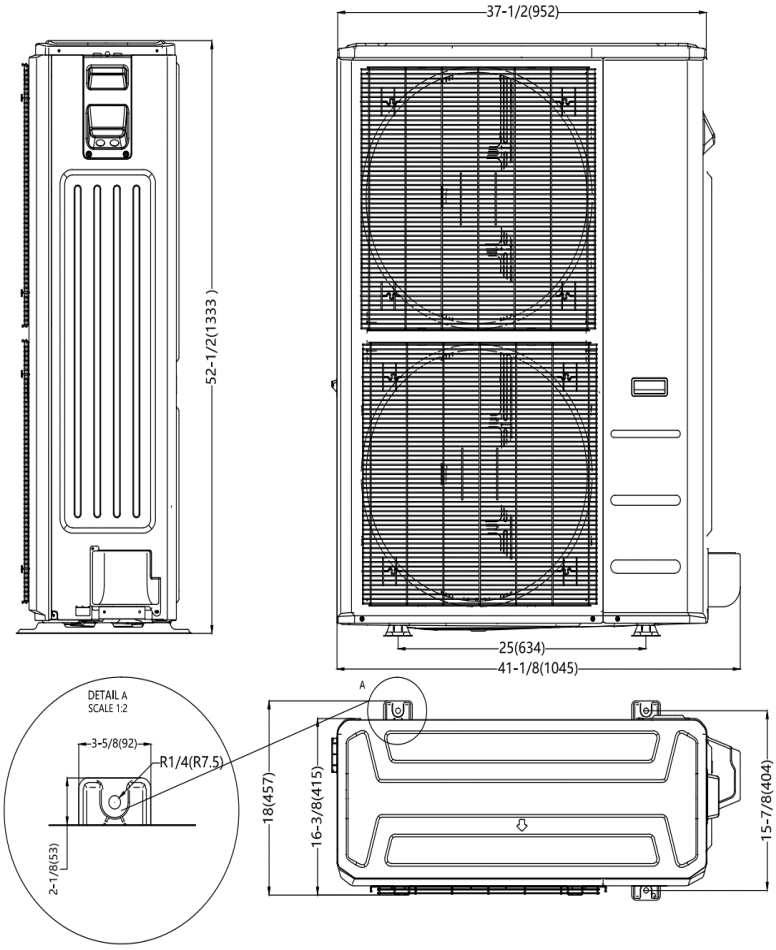

Installation Instruction For Outdoor Unit

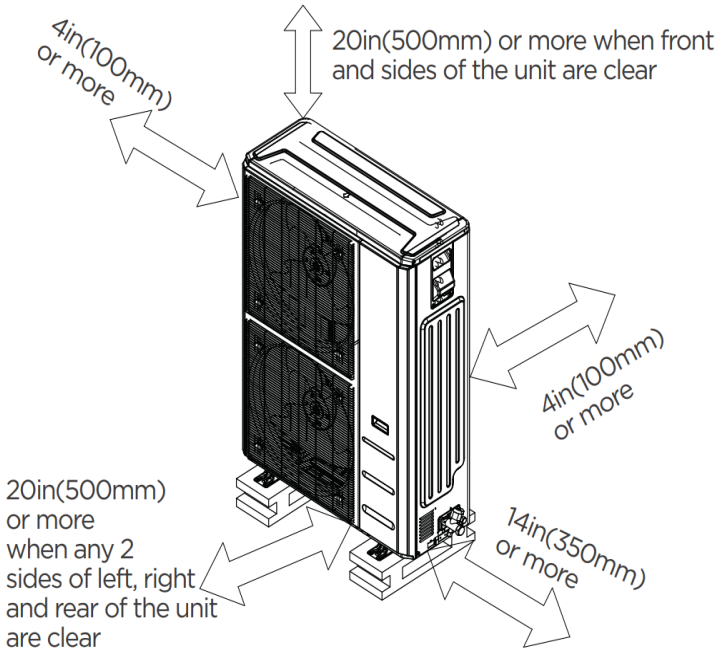

Features

- Multi-position installation: horizontal(left or right), vertical(up or down)
- Aluminum Coil
- R454B refrigerant sensor
- Easy Maintenance
- Multiple control options available:
  - Two way communication wired controller with built-in WiFi:120N(X6W)
  - Third-Party 24V Thermostat