

SUBMITTAL DATA SHEET

Ceiling&Floor Regular System BXALA60FC0-BXL1A60SC0

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	1365.6 / 1236.1 / 1118.3 / 882.9 / 777.0
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	N/A/54.5/49.5/41.5/38.5
Dimension (W×D×H)	inch 64.96 x 26.57 x 9.25
	mm 1650.0×675.0×235.0
Package (W×D×H)	inch 67.91 x 29.72 x 12.52
	mm 1725×755×318
Net/Gross Weight	lbs 95.24/111.33
	kg 43.2/50.5

OUTDOOR SPECIFICATION

Compressor Type	ROTARY
Compressor Model	KTQ420D1UMU
Refrigerant	R454B
Refrigerant Oil Charge(mL)	1400
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	4237.9
Outdoor Noise Level (dBA)	63.5
Dimension (W×D×H)	inch 37.48 x 16.34 x 52.48
	mm 952.0×415.0×1333.0
Package (W×D×H)	inch 43.11 x 19.49 x 58.27
	mm 1095×495×1480
Net/Gross Weight	lbs 209.44/240.08
	kg 95/108.9

EFFICIENCY

Cooling	Heating
SEER2 19.5	HSPF2-4 9.5
EER2 9.5	COP 3.05

PERFORMANCE of Cooling

Cooling (Btu/hr)
Rated Capacity 54000
Min/Max Capacity 15000~54500
Moisture Removal(L/h) 7.48
Standard Operating Range(°F/°C) -13~122(-25~50)
Conditions: Indoor: 80°F DB/67°F WB
Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)
1. @ 47°F Rated 60000
1. @ 47°F Min/Max Capacity 20200~60000
2. @ 17°F Rated 37200
3. @ 5°F Rated: Capacity / COP 35000/2.01
3. @ 5°F Max: Capacity 35000
Standard Operating Range(°F/°C) -13~75(-25~24)
1. Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 47°F DB/43°F WB
2. Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 17°F DB/15°F WB
3. Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	42.00
Connection Wiring	14#x3
System MOCP	45
Compressor RLA	25.0
Outdoor Fan Motor RLA	2.2
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	2.0
Indoor Fan Motor W	160
System Power Input @ Cooling (W)	5625(1400 ~ 6050)
System Power Input @ Heating (W)	5765(1150 ~5765)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING


Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	246.00(75)
Max. Height Difference(ft/m)	98.40(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	144.62(4.10)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared

Indoor Unit Dimension

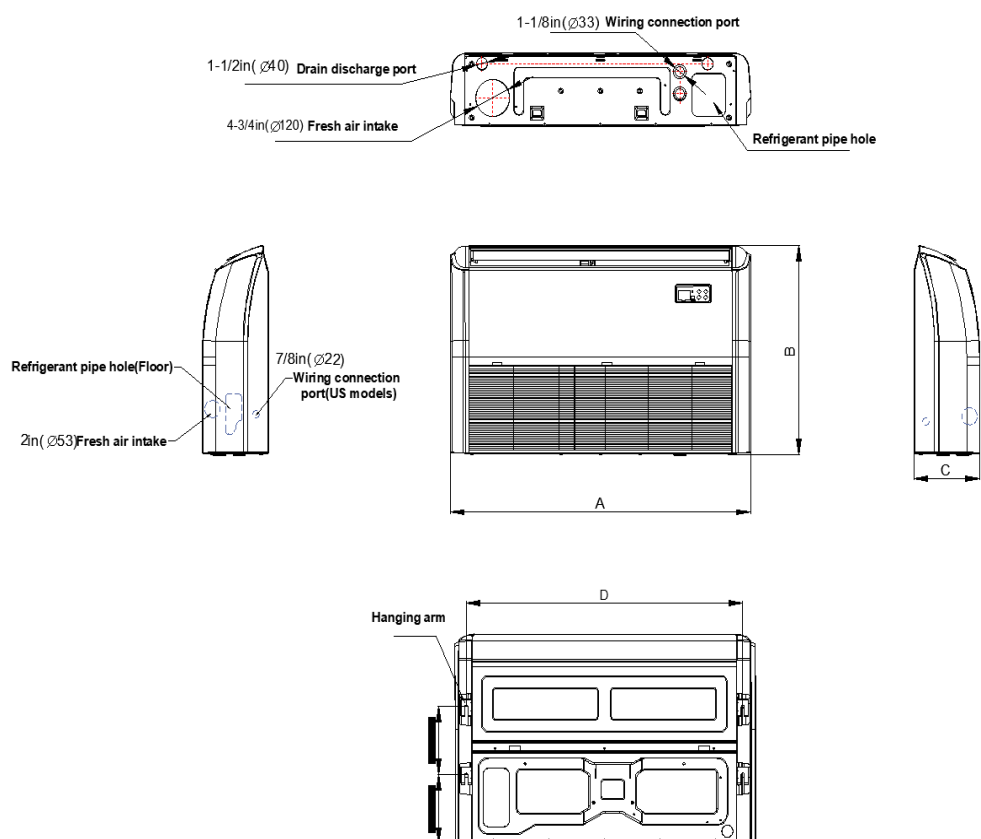


Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)

Installation Instruction

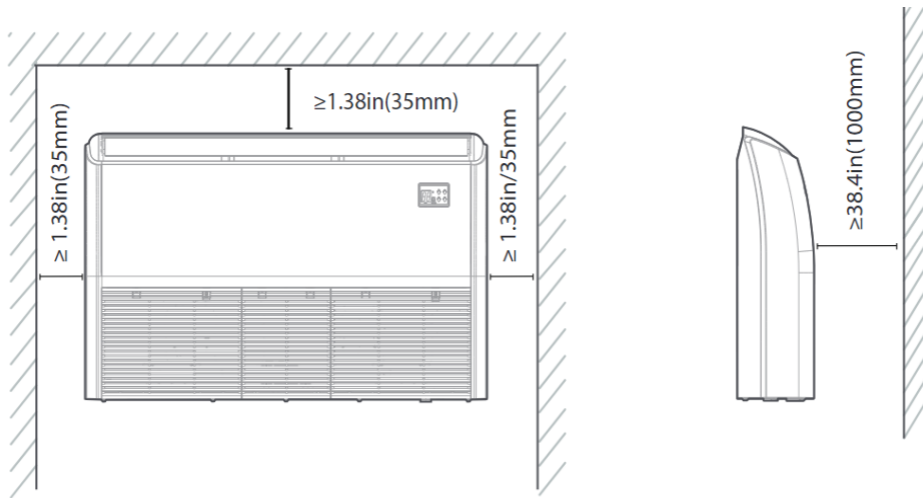


Outdoor Unit Dimension

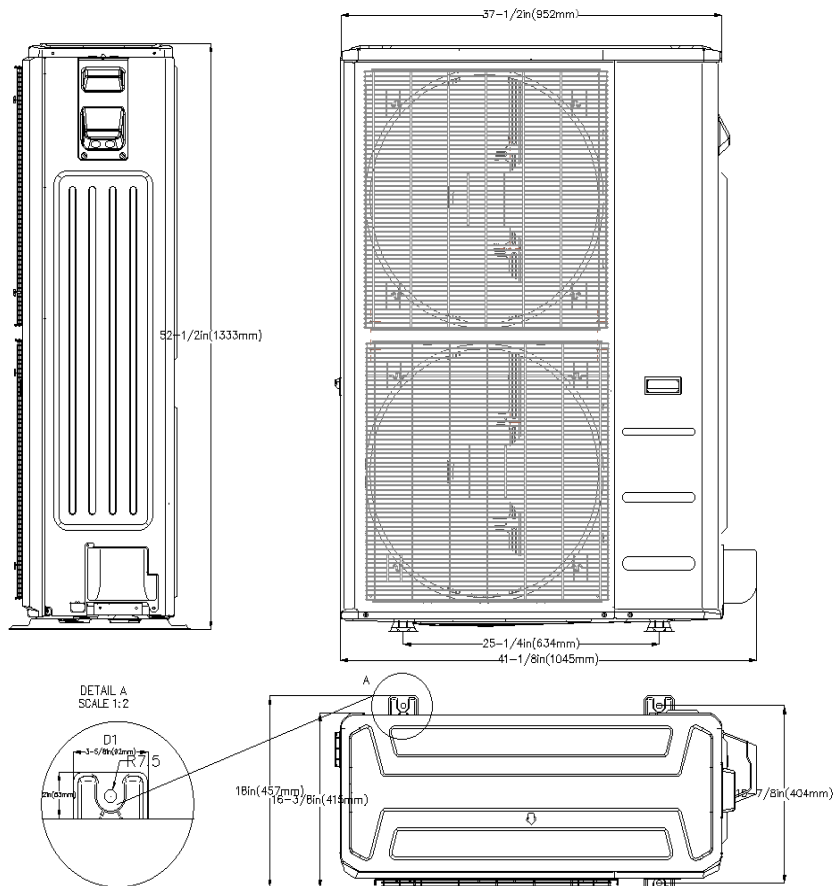

REQUIRED CLEARANCE

*1 20in. (500mm) or more when front and sides of the unit are clear

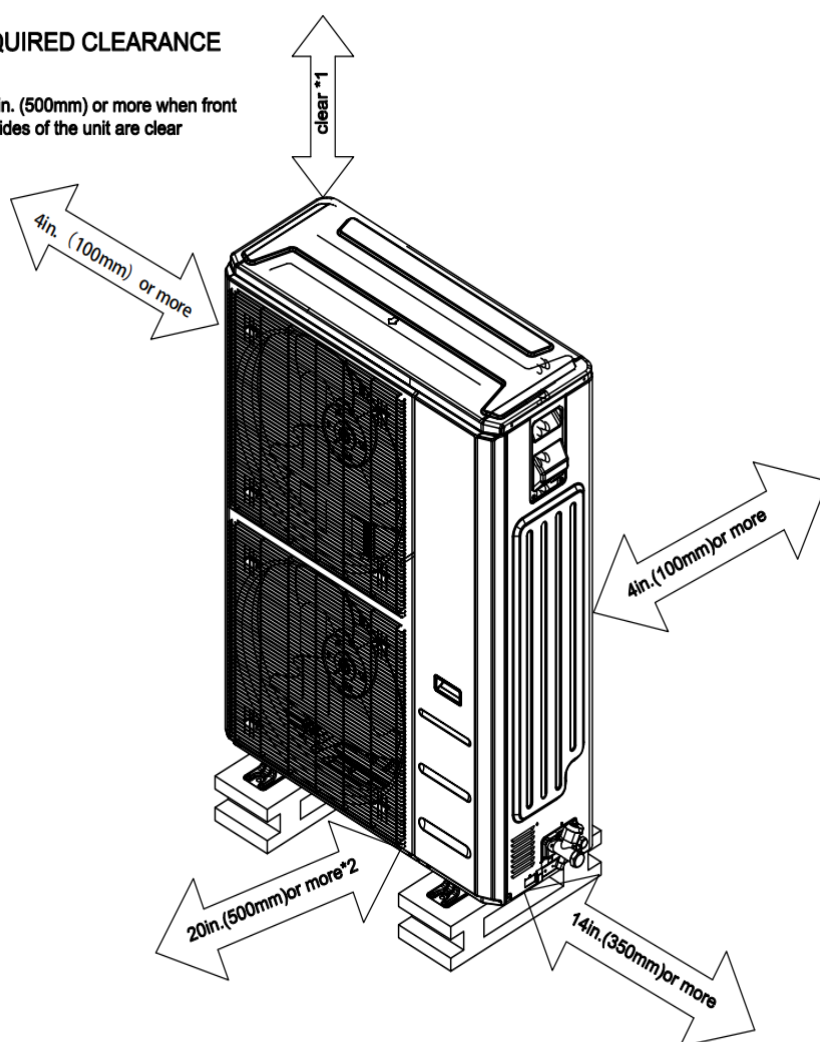

*2 When any 2 sides of left, right and rear of the unit are clear

FEATURES

- 2 Style Installation
- 3D Airflow
- Refrigerant leakage detection sensor
- Humidity sensor
- “88” display tube
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:
 - Two way communication wired controller:120N(X6)
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Infrared wired controller: 120L
 - Wireless remote controller
 - Third-Party 24V Thermostat*

*24V interface is required.