DAIKIN

NEXIO PLUS



R-32 High-Efficiency Gas/Electric Direct-Drive Packaged Rooftop Unit DHG Commercial 3-6 Nominal Tons

3-5 Ton Up To - 16.6 SEER2 / 12.5 EER2
6 Ton - 18.6 IEER / 12.5 EER

20 YEAR HEAT EXCHANGER LIMITED WARRANTY*

5 YEAR PARTS LIMITED WARRANTY*

C ETL LISTED US Intertek

AHRI CERTIFIED

ISO 9001

ISO 14001 CERTIFIED ENVIRONMENTAL MANAGEMENT SYSTEM

R32

*Complete warranty details available from your local distributor or manufacturer's representative or at www.daikincomfort.com



Our Perfect Package:

Harnessing energy-efficient performance, proven technology, and enhanced comfort for life.

Since becoming the first company in Japan to manufacture packaged air conditioning systems, in 1951, Daikin has supported comfortable indoor living based on the strengths and technologies that have led to the growth of the company becoming one of the world's largest manufacturers of HVAC products, systems and refrigerants.

Today, as a comprehensive global manufacturer of HVAC products and systems, the Daikin brand is committed to being recognized as a truly global and excellent company capable of continually creating new value for its customers. The company plans to pursue sustainable growth and foster business operations that consistently harmonize with the goals of improving indoor comfort.

The group philosophy of the company includes:

- Creating new value continuously for customers
- Developing world leading energy-saving technology
- Being a flexible and dynamic organization
- Allowing employees to be the driving force for the success of the company
- Fostering an atmosphere of best practices, boldness, and innovation
- Thinking and acting globally



Contents

2 Introduction 2

4 Nomenclature 4

5 Features and Benefits 5

Applications 8

Serviceability 8

9 Product Specifications 9

Standard and ULN

Coil Dimensions 21

AHRI Ratings 21

Sound Data 22

23 Dimensional Data 23

24 Expanding Cooling Data 24

40 Heating Data 40

42 Airflow 42

Fan Data Standard Static (Standard and ULN)

Fan Data High Static (Standard and ULN)

78 DDC Airflow 78

85 Static Pressures 85

86 HGRH Performance 86

90 Electrical Data 90

92 Wiring Diagrams 92

123 Electrical Connections 123

Unit Clearances 123

124 Installation 124

Weights 124

For details on accessories refer to document **PM-LC-ACCESSORIES**

Nomenclature

D	H	G	120	3	S	400	C	A	A	X	X	X	X	X	X	X	X	A	*
1	2	3	4,5,6	7	8	9,10,11	12	13	14	15	16	17	18	19	20	21	22	23	24

Brand
D Daikin

Configuration
S R-32 Standard Efficiency
H R-32 High Efficiency
V Inverter (variable speed compressor)

Application
C Cooling
G Gas Heat
H Heat Pump

Nominal Cooling Capacity

036	3 Tons	090	7½ Tons	180	15 Tons
048	4 Tons	102	8½ Tons	240	20 Tons
060	5 Tons	120	10 Tons	300	25 Tons
072	6 Tons	150	12½ tons		

Voltage
1 208-230/1/60
3 208-230/3/60
4 460/3/60
7 575/3/60

Supply Fan/Drive Type/Motor
D Direct Drive- Standard Static
L Direct Drive-Medium Static
W Direct Drive- High Static

Nominal Heating Capacity

Gas/Electric		A/C H/P Factory-Installed Electric Heat	
045	45,000 BTU/h	XXX	No Heat
060	60,000 BTU/h	005	5kW
070	70,000 BTU/h	010	10 kW
080	80,000 BTU/h	015	15 kW
090	90,000 BTU/h	020	20 kW
100	100,000 BTU/h	030	30 kW
115	115,000 BTU/h	045	45 kW
125	125,000 BTU/h	060	60 kW
130	130,000 BTU/h	075	75kW
140	140,000 BTU/h		
150	150,000 BTU/h	**Electric Heat w/ SCR controls**	
180	180,000 BTU/h	S05	5kW S30 30 kW
210	210,000 BTU/h	S10	10 kW S45 45 kW
225	225,000 BTU/h	S20	20 kW S60 60 kW
240	240,000 BTU/h	S22	20 kW S75 75kW
260	260,000 BTU/h	S25	25 kW
350	350,000 BTU/h		
360	360,000 BTU/h		
400	400,000 BTU/h		
480	480,000 BTU/h		

See product specifications for heat size(s) available for each capacity.

Refrigeration Systems
A Single stage cooling modes
C Two stage cooling modes
F Two stage cooling modes with Hot Gas Reheat and Low-ambient control
G Single stage cooling mode with Low-ambient controller
H Two stage cooling mode with Low-ambient controller
I Inverter (variable speed compressor)
J Inverter hot gas reheat (variable speed compressor)

Heat Exchanger
X No options
A Standard Aluminized Exchanger
S Stainless Steel Exchanger
U Ultra Low NO_x

Controls
A Electromechanical controls
B DDC w/ BACnet interface
I Inverter with Single-Zone Variable Air Volume (SZ VAV)
M Inverter with Multi-Zone Variable Air Volume (MZ VAV)
D Inverter with DKN+ (SZ VAV)
E Inverter with DKN+ (3rd Party Thermostat)

Sensors
D R-32 Sensor
E RA Smoke Detector w/ R32 Sensor
F SA Smoke Detector w/ R32 Sensor
G RA & SA Smoke Detector w/ R32 Sensor

Coils, Hail guard
X No Options
C Hail Guard

Economizer
X No Options
A Ultra Low-Leak Downflow Economizer w/ Enthalpy Sensor
C Ultra Low-Leak Internal Horizontal Economizer w/ Enthalpy Sensor
E Ultra Low-Leak Downflow Economizer for DDC controls w/ Enthalpy Sensor
F Ultra Low-Leak Horizontal Economizer for DDC controls w/ Enthalpy Sensor
G Ultra Low-Leak Downflow Economizer w/ Dry Bulb Sensor
J Ultra Low-Leak Internal Horizontal Economizer w/ Dry Bulb Sensor
L Ultra Low-Leak Downflow Economizer for DDC controls w/ Dry Bulb Sensor
M Ultra Low-Leak Horizontal Economizer for DDC controls w/ Dry Bulb Sensor

Electrical
X No Options
A Non-Fused Disconnect
B Phase Monitor
C Thru-the-base connections
D SCCR
E Non-Fused Disconnect and Phase Monitor
F Non-Fused Disconnect and Thru-the-base connectons
G Non-Fused Disconnect and SCCR
H Phase Monitor and Thru-the-base connections
J Phase Monitor and SCCR
K Thru-the-base connections and SCCR
L Non-Fused Disconnect, Thru-the-base connectons and Phase Monitor
M Non-Fused Disconnect, Phase Monitor and SCCR
N Non-Fused Disconnect, Thru-the-base connectons and SCCR
P Phase Monitor, Thru-the-base connections and SCCR
Q Non-Fused Disconnect, Thru-the-base connectons, Phase Monitor and SCCR

Service Options
A Powered convenience outlet
B Non-powered convenience outlet
C Hinge Panels
D Hinged Panels and Powered convenience outlet
E Hinged Panels and non-powered convenience outlet
X No Options

IAQ
X No Options

PE Connection
X No Options
B Single point power connection for Power Exhaust
T Single point power connection for Power Exhaust (w/ Transformer)

Revision Levels
Major & Minor

X No Options

G/E Stocking Models

3-6 Ton High Efficiency

Model Number	Code String
DHG0361DL00001S	DHG0361D045CAADXXXXXXXAA
DHG0361DM00001S	DHG0361D070CAADXXXXXXXAA
DHG0361DH00001S	DHG0361D115CAADXXXXXXXAA
DHG0361D600001F	DHG0361D060CUADXXXXXXXAA
DHG0361D800001F	DHG0361D080CUADXXXXXXXAA
DHG0361D100001F	DHG0361D100CUADXXXXXXXAA
DHG0363DL00001S	DHG0363D045CAADXXXXXXXAA
DHG0363DM00001S	DHG0363D070CAADXXXXXXXAA
DHG0363DH00001S	DHG0363D115CAADXXXXXXXAA
DHG0363D600001F	DHG0363D060CUADXXXXXXXAA
DHG0363D800001F	DHG0363D080CUADXXXXXXXAA
DHG0363D100001F	DHG0363D100CUADXXXXXXXAA
DHG0364DL00001S	DHG0364D045CAADXXXXXXXAA
DHG0364DM00001S	DHG0364D070CAADXXXXXXXAA
DHG0364DH00001S	DHG0364D115CAADXXXXXXXAA
DHG0364D600001F	DHG0364D060CUADXXXXXXXAA
DHG0364D800001F	DHG0364D080CUADXXXXXXXAA
DHG0364D100001F	DHG0364D100CUADXXXXXXXAA
DHG0367DL00001S	DHG0367D045CAADXXXXXXXAA
DHG0367DM00001S	DHG0367D070CAADXXXXXXXAA
DHG0367DH00001S	DHG0367D115CAADXXXXXXXAA
DHG0481DL00001S	DHG0481D070CAADXXXXXXXAA
DHG0481DM00001S	DHG0481D115CAADXXXXXXXAA
DHG0481DH00001S	DHG0481D140CAADXXXXXXXAA
DHG0481D800001F	DHG0481D080CUADXXXXXXXAA
DHG0481D100001F	DHG0481D100CUADXXXXXXXAA
DHG0483DL00001S	DHG0483D070CAADXXXXXXXAA
DHG0483DM00001S	DHG0483D115CAADXXXXXXXAA
DHG0483DH00001S	DHG0483D140CAADXXXXXXXAA
DHG0483D800001F	DHG0483D080CUADXXXXXXXAA
DHG0483D100001F	DHG0483D100CUADXXXXXXXAA
DHG0484DL00001S	DHG0484D070CAADXXXXXXXAA
DHG0484DM00001S	DHG0484D115CAADXXXXXXXAA
DHG0484DH00001S	DHG0484D140CAADXXXXXXXAA
DHG0484D800001F	DHG0484D080CUADXXXXXXXAA
DHG0484D100001F	DHG0484D100CUADXXXXXXXAA
DHG0487DL00001S	DHG0487D070CAADXXXXXXXAA
DHG0487DM00001S	DHG0487D115CAADXXXXXXXAA
DHG0487DH00001S	DHG0487D140CAADXXXXXXXAA
DHG0601DL00001S	DHG0601D070CAADXXXXXXXAA
DHG0601DM00001S	DHG0601D115CAADXXXXXXXAA
DHG0601DH00001S	DHG0601D140CAADXXXXXXXAA
DHG0601D800001F	DHG0601D080CUADXXXXXXXAA
DHG0601D100001F	DHG0601D100CUADXXXXXXXAA
DHG0603DL00001S	DHG0603D070CAADXXXXXXXAA
DHG0603DM00001S	DHG0603D115CAADXXXXXXXAA
DHG0603DH00001S	DHG0603D140CAADXXXXXXXAA
DHG0603D800001F	DHG0603D080CUADXXXXXXXAA
DHG0603D100001F	DHG0603D100CUADXXXXXXXAA
DHG0604DL00001S	DHG0604D070CAADXXXXXXXAA
DHG0604DM00001S	DHG0604D115CAADXXXXXXXAA
DHG0604DH00001S	DHG0604D140CAADXXXXXXXAA
DHG0604D800001F	DHG0604D080CUADXXXXXXXAA
DHG0604D100001F	DHG0604D100CUADXXXXXXXAA
DHG0607DL00001S	DHG0607D070CAADXXXXXXXAA
DHG0607DM00001S	DHG0607D115CAADXXXXXXXAA
DHG0607DH00001S	DHG0607D140CAADXXXXXXXAA
DHG0723DL00001S	DHG0723D070CAADXXXXXXXAA
DHG0723DM00001S	DHG0723D125CAADXXXXXXXAA
DHG0723DH00001S	DHG0723D150CAADXXXXXXXAA
DHG0723WL00001F	DHG0723W070CAADXXXXXXXAA
DHG0723WM00001F	DHG0723W125CAADXXXXXXXAA
DHG0723WH00001F	DHG0723W150CAADXXXXXXXAA
DHG0724DL00001S	DHG0724D070CAADXXXXXXXAA
DHG0724DM00001S	DHG0724D125CAADXXXXXXXAA
DHG0724DH00001S	DHG0724D150CAADXXXXXXXAA
DHG0724WL00001F	DHG0724W070CAADXXXXXXXAA
DHG0724WM00001F	DHG0724W125CAADXXXXXXXAA
DHG0724WH00001F	DHG0724W150CAADXXXXXXXAA
DHG0727DL00001S	DHG0727D070CAADXXXXXXXAA
DHG0727DM00001S	DHG0727D125CAADXXXXXXXAA
DHG0727DH00001S	DHG0727D150CAADXXXXXXXAA
DHG0727WL00001F	DHG0727W070CAADXXXXXXXAA
DHG0727WM00001F	DHG0727W125CAADXXXXXXXAA
DHG0727WH00001F	DHG0727W150CAADXXXXXXXAA

Daikin Packaged Rooftop Units (RTUs) are built to perform, with features and options that help provide low installation and operation costs, superior indoor air quality, efficient operation, and longevity.

Installation

Daikin Packaged units are designed with fast and easy installation in mind and are ideal for both new construction and retrofit projects. Our packaged rooftop units are built to be a direct replacement for most rooftop units on the field without the need of a curb adapter, to be able to replace the unit in a shorter time and at a lower cost (compared to the previous design).

Cabinet Construction

Daikin packaged rooftop units are made with high quality galvanized steel with a powder-paint finish to provide higher corrosion resistance.

- Easy accessibility using our tool-less filter access.
- The interior surface in the indoor air section is fully insulated to prevent sweating and thermal losses, using our foil face fiberglass insulation which also omits exposed filter fibers into the airstream.
- 1" Raised flanged edges around the supply and return offer easy installation for the duct connections.



- The full perimeter base rail is built using heavy gauge galvanized steel for a stronger structural installation. The base rails are a minimum of 3 ½" tall and include holes to allow for overhead rigging and lifting with forklifts.
- Electrical lines and gas lines can be brought through the base of the unit or through the horizontal knockout for easy installation and accessibility on the field.

Compressor

High performance, low noise scroll compressors to match the required total load.

- Two-stage scroll compressor for partial load applications.
- Resiliently factory-mounted on rubber grommets for vibration isolation
- Unit is factory charged with environmentally friendly low GWP R-32 refrigerant.
- Compressor location outside the condenser section to avoid air bypass.
- Internal overload protection included with compressor.

Supply Fan

The direct-drive with airfoil single width, single inlet (SWSI) Class II construction supply fan with aluminum fan +blades provides efficient and quiet operation at wide ranging static pressure and air flow requirements.

- Fan wheel is continuously welded to the hub plate and end rim for long lasting reliable operation.
- Direct-drive ECM motor removes the need for belts, sheaves, or bearings and its permanently lubricated motors provides low maintenance cost.
- Each fan assembly is dynamically trim balanced at the factory before shipment for quick start-up and efficient operation.
- Electromechanical integrated controls modulate the supply fan motor
- Motor with thermal overload and phase failure protection is provided for motor long lasting operation.

Coils

All units use large face area outdoor coils. These coils are constructed with seamless copper tubes, mechanically bonded into aluminum plate-type fins with full drawn collars to completely cover the tubes for high operating efficiencies.

The indoor coil section is installed in a draw through configuration to provide better dehumidification.

- Coils are factory pressure tested to ensure pressure and leak integrity.

» Copper tube / aluminum fin coils on condenser and evaporator
» Removable Drain pan for easy maintenance and cleaning.
» 5mm Smart Coil Technology on all condenser coils for improved performance and reduced refrigerant load.

Controls and Wiring

Packaged rooftop units come equipped with a well-organized, large, easy to use, weatherproof internal control box with easy access, for a better user experience.

» Units are factory-wired with labeled color-coded wires and complete 24-volt electromechanical controls package.
» Terminal blocks are provided as standard for easy installation and field power wiring.
» The Daikin iLINQ Controller is a factory-installed solution to provide intelligent control for Daikin Light Commercial rooftop units* (RTUs). iLINQ provides physical inputs and outputs to control and monitor the RTU and features a graphic web interface for remote access (via a computer or tablet). Equipped with built-in BACnet™ IP and MS/TP interface or it can be used with an optional LonWorks® card that is available to integrate the Daikin RTU with building automation systems (BMS).

Filtration

Unit provides a draw-through filter section as standard for better air quality and long lasting component maintenance.

» Filters installed on the units are standard off the shelf sizes for easy replacement.
» One size filter per unit for low maintenance cost and easy replacement.
» Tool-less filter access for easy and fast filter replacement and service.

Heating Section

Wide range of natural gas selections effectively handle most comfort heating demand from morning warm-up control to full heat, all available with Daikin's Wrinkle Bend heat exchanger technology.

Gas Furnace

ETL certified heating modules provide a custom match to specific design requirement.

» Wrinkle Bend Technology available on all Daikin gas heat exchangers. The Wrinkle Bend Technology reduces the manufacturing stress that leads to defects and pinholes in the tubes at the same time as it increases the gas turbulence to amplify the heat transfer.
» All single phase 3-5 ton Gas units have 81% AFUE.
» All 3-Phase models have a minimum 81% T.E. (Thermal Efficiency)
» User has the flexibility to order heat exchanger tubes with 20 Gauge, G160, aluminized steel or stainless steel to meet your application needs.
» The furnace has a tubular design with in-shot gas burner manifold /Ultra-low NO_x burner technology and is installed downstream of the supply fan.
» The module contains an induced draft fan that will maintain a negative pressure in the heat exchanger tubes for the removal of the flue gases to protect indoor air quality.
» Each burner module provides flame roll-out/burner safety protection switches and a high temperature limit switch for reliable operation.
» Induced draft fan includes an airflow safety switch to prevent heating operation in the event of no airflow for occupant safety.
» All burner assemblies are factory tested and adjusted prior to shipment.
» Heating control is fully integrated into the unit's control system for quick start-up and reliable control.
» Optional field installed LP kits are available for staged heating modules as well as high altitude kits.


Electrical

Units are completely wired and tested at the factory to provide faster commissioning and start-up.

» Wiring complies with NEC requirements and all applicable UL standards.
» For ease of use, wiring and electrical components are number coded and labeled according to the electrical diagram.
» A 115 V GFI convenience outlet requiring independent power supply for the receptacle is optional.
» An optional unit powered 20 amp 115 V convenience outlet, complete with factory mounted transformer, disconnect switch, and primary and secondary overload protection, eliminates the need to pull a separate 115 V power source.
» Supply air fan, compressor, and condenser fan motor branch circuits have individual short circuit protection. Unit includes knockouts in the bottom of the main control panels for field wiring entrance.
» A single-point power connection with power block is standard and a terminal board is provided for connecting low voltage control wiring.
» For better serviceability an optional non-fused disconnect switch can be installed inside the control panel and operated by an externally mounted handle to disconnect the electrical power at the unit.

Daikin Modulating Hot Gas Reheat Dehumidification

Using a space sensor in conjunction with the Daikin iLINQ Controller and Reheat Module, the unit can initiate a Dehumidification Mode as the space humidity rises above setpoint. In this mode, the modulating valve diverts a percentage of the hot gas to the reheat coil as required in order to maintain supply air temperature requirements while lowering the space relative humidity. The modulating valve system allows smooth transition into dehumidification and longer run time at a steady supply air temperature. The indoor fan will operate at high and low speed during dehumidification mode.

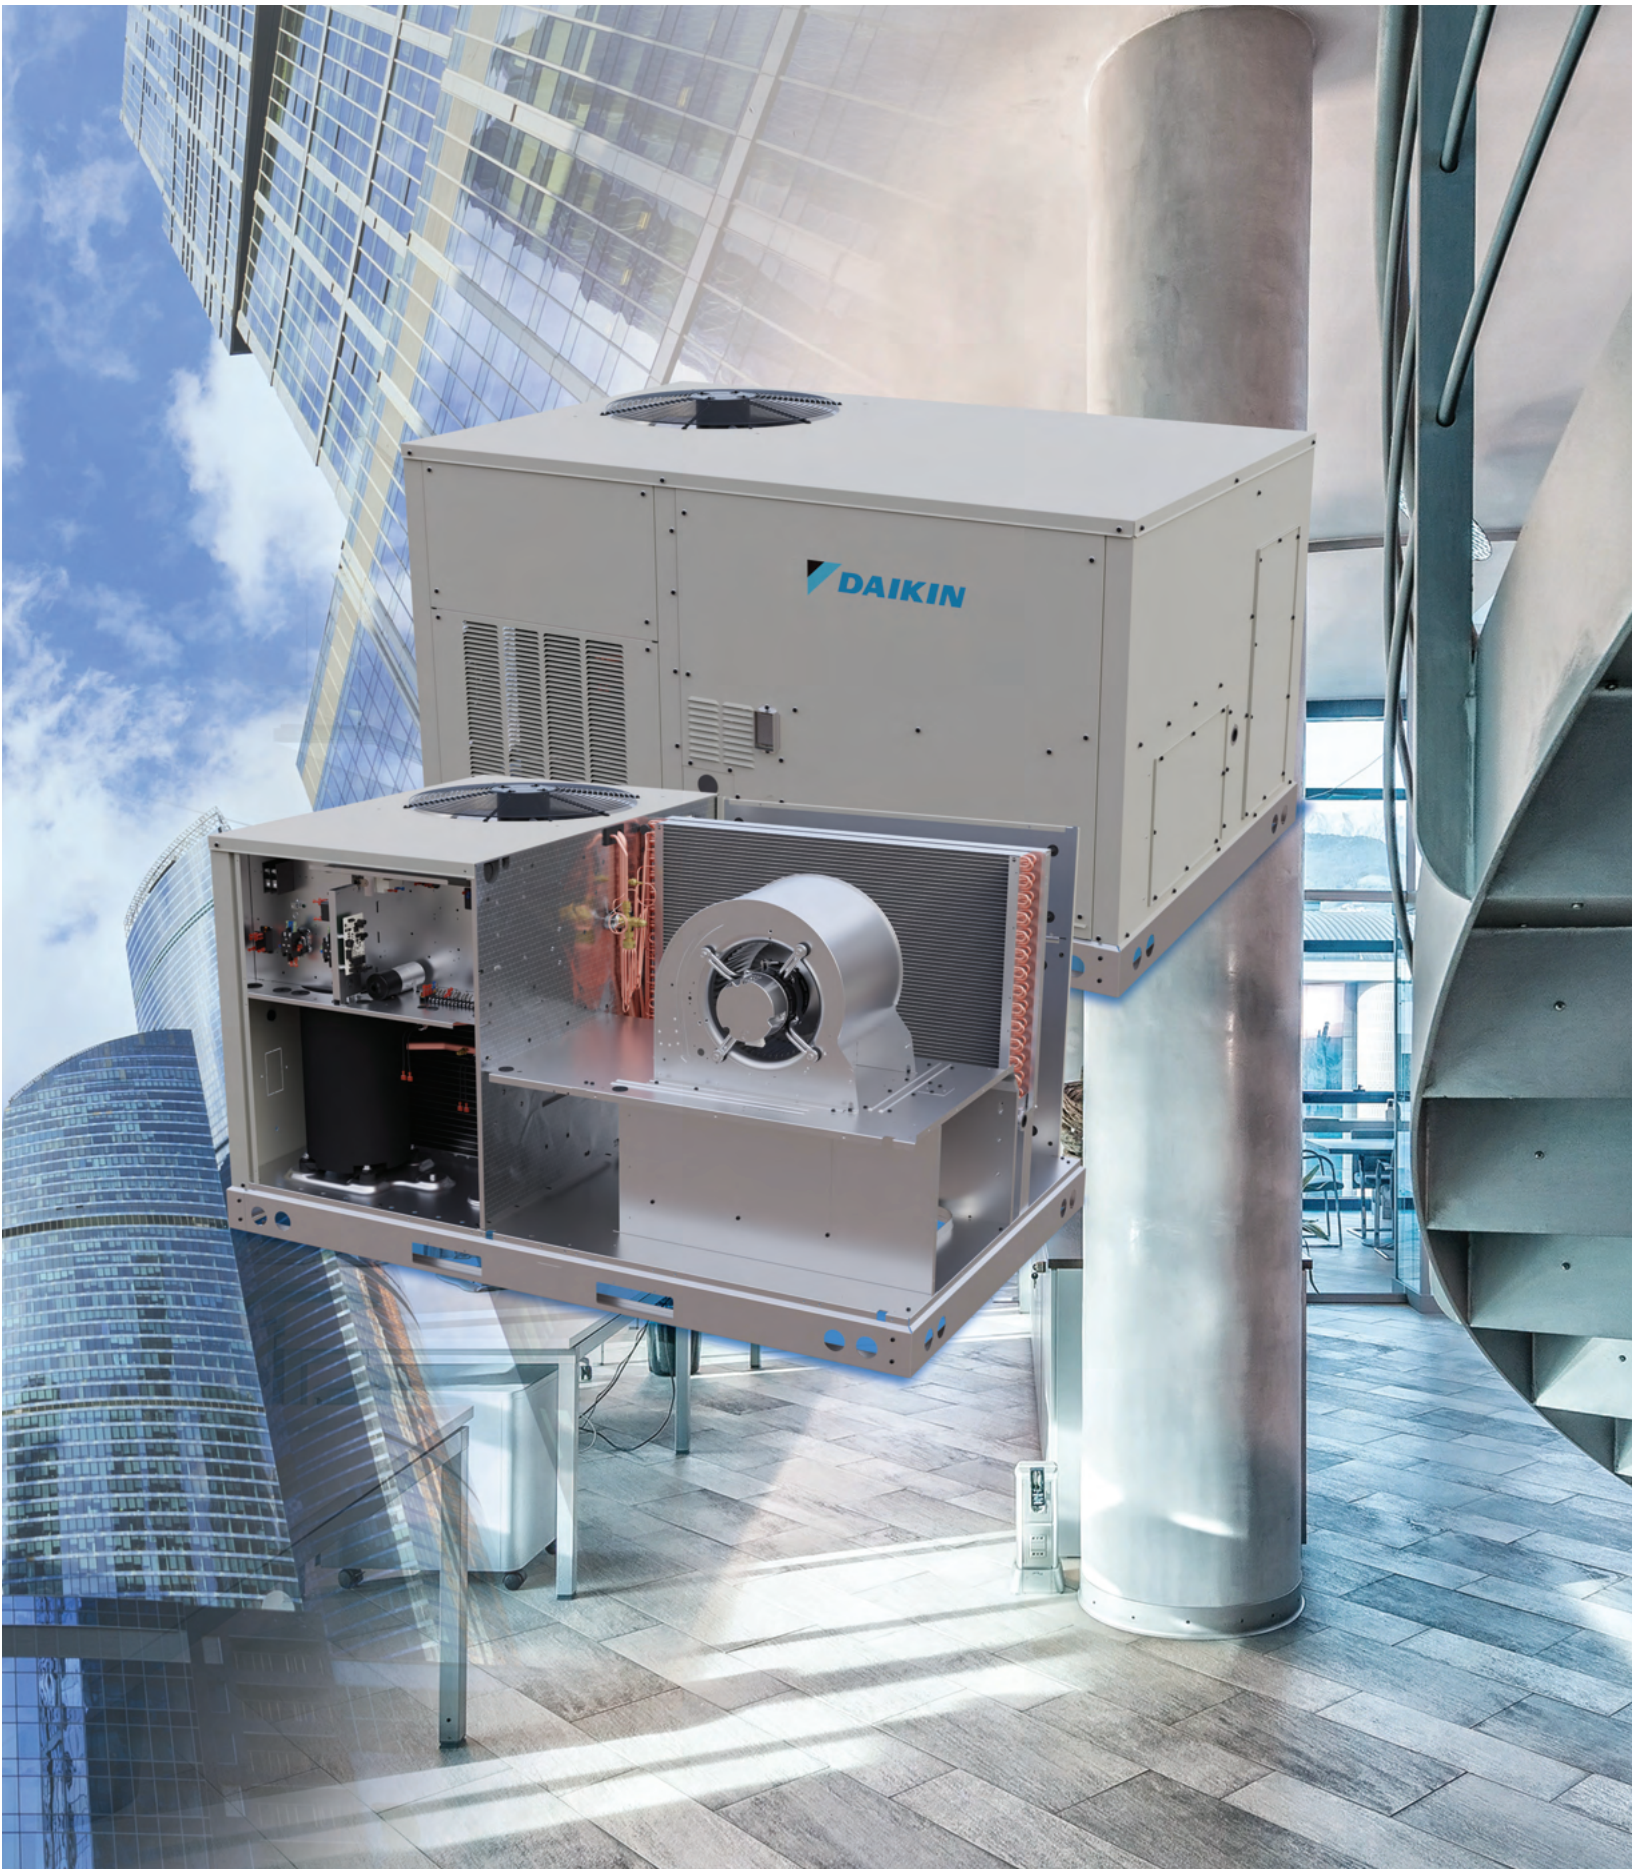
DAIKIN


Applications

Daikin Rooftop units are intended for comfort cooling applications in normal heating, ventilating, and air conditioning. Consult your local Daikin sales representative for applications involving operations at high ambient temperatures, high altitudes, non-cataloged voltages, or for job-specific unit selections that fall outside of the range of the catalog tables.

For proper operation, units should be rigged in accordance with instructions stated on the installation manual. Fire dampers, if required, must be installed in the ductwork according to local and/or state codes. No space is allowed for these dampers in the unit.

Follow factory check, test and start procedures explicitly to achieve satisfactory start-up and operation.

Most rooftop applications take advantage of the significant energy savings provided with economizer operation. When an economizer system is used, mechanical refrigeration is typically not required below an ambient temperature of 50°F.

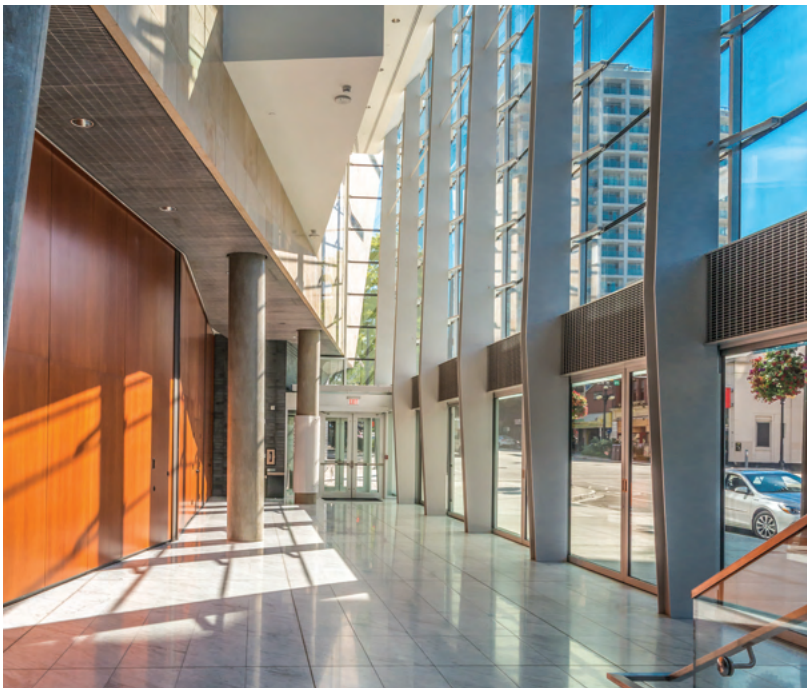

Serviceability

Daikin packaged rooftop units are built with serviceability in mind, designed to make future maintenance and service on the unit easy and accessible.

- Our packaged rooftop units offer a slide out blower to facilitate the access and removal of the fan.
- Filter panels on the small chassis line offer tool-less access for easy maintenance.
- Independent compressor outside of the air bypass to eliminate component blockage and provide easy access.
- Labeled field connections, color coded and continuously marked wire to identify point-to-point component connections.
- All 3-12.5 ton units are designed for convertible airflow orientation to serve downflow or horizontal applications. Every unit ships prepared to convert to horizontal orientation in the field if required.
- Condenser clean out from inside-out.
- Easy access to gas valves and control panel.



Model	DHG0361DL00001S	DHG0361DM00001S	DHG0361DH00001S	DHG0363DL00001S	DHG0363DM00001S	DHG0363DH00001S
COOLING CAPACITY						
Total BTU/H	35,000	35,000	35,000	35,000	35,000	35,000
SEER2 / EER2	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5
AHRI Reference #	216019231	216019231	216019231	216019232	216019232	216019232
HEATING CAPACITY						
Heat Range	Low	Medium	High	Low	Medium	High
No. of Burners	2	3	6	2	3	6
High Stage Input / Output (KBTU/H)	45.0 / 36.5	70.0 / 56.7	115.0 / 93.2	45.0 / 36.5	70.0 / 56.7	115.0 / 93.2
Low Stage Input / Output (KBTU/H)	33.8 / 27.4	52.5 / 42.5	86.3 / 69.9	33.8 / 27.4	52.5 / 42.5	86.3 / 69.9
Thermal Efficiency (T.E.)	--	--	--	80	80	80
Annual Fuel Utilization Efficiency (AFUE)	81	81	81	--	--	--
Nox Emissions	40	40	40	40	40	40
High Stage Temperature Rise Range (°F)	15 - 45	25 - 55	45 - 75	15 - 45	25 - 55	45 - 75
Low Stage Temperature Rise Range (°F)	5 - 35	15 - 45	35 - 65	5 - 35	15 - 45	35 - 65
Static Pressure Range (In. W.C.)	0.10 - 0.80	0.12 - 0.80	0.20 - 0.80	0.10 - 0.80	0.12 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL						
Motor Type	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	1160	1160	1160	1160	1160	1160
RPM	1200	1200	1200	1200	1200	1200
Indoor Horsepower	0.75	0.75	0.75	0.75	0.75	0.75
Filter Size (in)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)
Drain Size (NPT)	¾	¾	¾	¾	¾	¾
R32 Refrigerant Charge (oz.)	82	82	82	82	82	82
Evaporator Coil Face Area (ft^2)	7.3	7.3	7.3	7.3	7.3	7.3
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	1	1	1	1	1	1
RPM (High/Low stage)	810	810	810	810	810	810
Outdoor Horsepower	1/6	1/6	1/6	1/6	1/6	1/6
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3
Face Area (ft^2)	12.5	12.5	12.5	12.5	12.5	12.5
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28
COMPRESSOR						
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	14.5 / 91.0	14.5 / 91.0	14.5 / 91.0	9.2 / 82.0	9.2 / 82.0	9.2 / 82.0
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-1-60	208/230-1-60	208/230-1-60	208/230-3-60	208/230-3-60	208/230-3-60
Indoor Blower FLA	5.7	5.7	5.7	5.7	5.7	5.7
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	0.95	0.95	0.95	0.95	0.95	0.95
Min. Circuit Ampacity[1]	24.8/24.8	24.8/24.8	24.8/24.8	18.1 / 18.1	18.1 / 18.1	18.1 / 18.1
Max. Overcurrent Protection (A)[2]	35 / 35	35 / 35	35 / 35	25 / 25	25 / 25	25 / 25
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	572	572	572	572	572	572
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	630	630	630	630	630	630

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0364DL00001S	DHG0364DM00001S	DHG0364DH00001S	DHG0367DL00001S	DHG0367DM00001S	DHG0367DH00001S
COOLING CAPACITY						
Total BTU/H	35,000	35,000	35,000	35,000	35,000	35,000
SEER2 / EER2	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5
AHRI Reference #	216019233	216019233	216019233	216019234	216019234	216019234
HEATING CAPACITY						
Heat Range	Low	Medium	High	Low	Medium	High
No. of Burners	2	3	6	2	3	6
High Stage Input / Output (KBTU/H)	45.0 / 36.5	70.0 / 56.7	115.0 / 93.2	45.0 / 36.5	70.0 / 56.7	115.0 / 93.2
Low Stage Input / Output (KBTU/H)	33.8 / 27.4	52.5 / 42.5	86.3 / 69.9	33.8 / 27.4	52.5 / 42.5	86.3 / 69.9
Thermal Efficiency (T.E.)	80	80	80	80	80	80
Annual Fuel Utilization Efficiency (AFUE)	--	--	--	--	--	--
Nox Emissions	40	40	40	40	40	40
High Stage Temperature Rise Range (°F)	15 - 45	25 - 55	45 - 75	15 - 45	25 - 55	45 - 75
Low Stage Temperature Rise Range (°F)	5 - 35	15 - 45	35 - 65	5 - 35	15 - 45	35 - 65
Static Pressure Range (In. W.C.)	0.10 - 0.80	0.12 - 0.80	0.20 - 0.80	0.10 - 0.80	0.12 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL						
Motor Type	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	1160	1160	1160	1160	1160	1160
RPM	1500	1500	1500	1500	1500	1500
Indoor Horsepower	1.2	1.2	1.2	1.2	1.2	1.2
Filter Size (in)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)
Drain Size (NPT)	¾	¾	¾	¾	¾	¾
R32 Refrigerant Charge (oz.)	82	82	82	82	82	82
Evaporator Coil Face Area (ft^2)	7.3	7.3	7.3	7.3	7.3	7.3
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	1	1	1	1	1	1
RPM (High/Low stage)	810	810	810	810	810	810
Outdoor Horsepower	1/6	1/6	1/6	1/6	1/6	1/6
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3
Face Area (ft^2)	12.5	12.5	12.5	12.5	12.5	12.5
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28
COMPRESSOR						
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	4.2 / 44.3	4.2 / 44.3	4.2 / 44.3	3.7 / 28.7	3.7 / 28.7	3.7 / 28.7
ELECTRICAL DATA						
Voltage-Phase-Frequency	460-3-60	460-3-60	460-3-60	575-3-60	575-3-60	575-3-60
Indoor Blower FLA	2.5	2.5	2.5	2	2	2
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	0.48	0.48	0.48	0.39	0.39	0.39
Min. Circuit Ampacity[1]	8.2	8.2	8.2	7.0	7.0	7.0
Max. Overcurrent Protection (A)[2]	15	15	15	15	15	15
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	572	572	572	572	572	572
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	630	630	630	630	630	630

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0481DL00001S	DHG0481DM00001S	DHG0481DH00001S	DHG0483DL00001S	DHG0483DM00001S	DHG0483DH00001S
COOLING CAPACITY						
Total BTU/H	46,000	46,000	46,000	46,000	46,000	46,000
SEER2 / EER2	16.4 / 12.2	16.4 / 12.2	16.4 / 12.2	16.4 / 12.2	16.4 / 12.2	16.4 / 12.2
AHRI Reference #	216019235	216019235	216019235	216019236	216019236	216019236
HEATING CAPACITY						
Heat Range	Low	Medium	High	Low	Medium	High
No. of Burners	3	5	6	3	5	6
High Stage Input / Output (KBTU/H)	70.0 / 56.7	115.0 / 93.2	140.0 /113.4	70.0 / 56.7	115.0 / 93.2	140.0 /113.4
Low Stage Input / Output (KBTU/H)	52.5 / 42.5	86.3 / 69.9	105.0 / 85.1	52.5 / 42.5	86.3 / 69.9	105.0 / 85.1
Thermal Efficiency (T.E.)	--	--	--	80	80	80
Annual Fuel Utilization Efficiency (AFUE)	81	81	81	--	--	--
Nox Emissions	40	40	40	40	40	40
High Stage Temperature Rise Range (°F)	25 - 55	30 - 60	35 - 65	25 - 55	30 - 60	35 - 65
Low Stage Temperature Rise Range (°F)	20 - 50	20 - 50	25 - 55	20 - 50	20 - 50	25 - 55
Static Pressure Range (In. W.C.)	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL						
Motor Type	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	1460	1460	1460	1460	1460	1460
RPM	1200	1200	1200	1200	1200	1200
Indoor Horsepower	1.0	1.0	1.0	1.0	1.0	1.0
Filter Size (in)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)
Drain Size (NPT)	¾	¾	3/4	¾	¾	¾
R32 Refrigerant Charge (oz.)	91	91	91	91	91	91
Evaporator Coil Face Area (ft^2)	7.3	7.3	7.3	7.3	7.3	7.3
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	1	1	1	1	1	1
RPM (High/Low stage)	810	810	810	810	810	810
Outdoor Horsepower	1/6	1/6	1/6	1/6	1/6	1/6
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3
Face Area (ft^2)	19.0	19.0	19.0	19.0	19.0	19.0
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28
COMPRESSOR						
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	23.2 / 128	23.2 / 128	23.2 / 128	12.0 / 105	12.0 / 105	12.0 / 105
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-1-60	208/230-1-60	208/230-1-60	208/230-3-60	208/230-3-60	208/230-3-60
Indoor Blower FLA	6.9	6.9	6.9	6.9	6.9	6.9
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	0.95	0.95	0.95	0.95	0.95	0.95
Min. Circuit Ampacity[1]	36.9 / 36.9	36.9 / 36.9	36.9 / 36.9	22.8 / 22.8	22.8 / 22.8	22.8 / 22.8
Max. Overcurrent Protection (A)[2]	60 / 60	60 / 60	60 / 60	30 / 30	30 / 30	30 / 30
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	647	647	647	647	647	647
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	705	705	705	705	705	705

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0484DL00001S	DHG0484DM00001S	DHG0484DH00001S	DHG0487DL00001S	DHG0487DM00001S	DHG0487DH00001S
COOLING CAPACITY						
Total BTU/H	46,000	46,000	46,000	46,000	46,000	46,000
SEER2 / EER2	16.4 / 12.2	16.4 / 12.2	16.4 / 12.2	16.4 / 12.2	16.4 / 12.2	16.4 / 12.2
AHRI Reference #	216019237	216019237	216019237	216019238	216019238	216019238
HEATING CAPACITY						
Heat Range	Low	Medium	High	Low	Medium	High
No. of Burners	3	5	6	3	5	6
High Stage Input / Output (KBTU/H)	70.0 / 56.7	115.0 / 93.2	140.0 /113.4	70.0 / 56.7	115.0 / 93.2	140.0 /113.4
Low Stage Input / Output (KBTU/H)	52.5 / 42.5	86.3 / 69.9	105.0 / 85.1	52.5 / 42.5	86.3 / 69.9	105.0 / 85.1
Thermal Efficiency (T.E.)	80	80	80	80	80	80
Annual Fuel Utilization Efficiency (AFUE)	--	--	--	--	--	--
Nox Emissions	40	40	40	40	40	40
High Stage Temperature Rise Range (°F)	25 - 55	30 - 60	35 - 65	25 - 55	30 - 60	35 - 65
Low Stage Temperature Rise Range (°F)	20 - 50	20 - 50	25 - 55	20 - 50	20 - 50	25 - 55
Static Pressure Range (In. W.C.)	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL						
Motor Type	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	1460	1460	1460	1460	1460	1460
RPM	1500	1500	1500	1500	1500	1500
Indoor Horsepower	1.2	1.2	1.2	1.2	1.2	1.2
Filter Size (in)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)
Drain Size (NPT)	¾	¾	¾	¾	¾	¾
R32 Refrigerant Charge (oz.)	91	91	91	91	91	91
Evaporator Coil Face Area (ft²)	7.3	7.3	7.3	7.3	7.3	7.3
Rows Deep/ Fins per Inch	4/16	4/16	4/16	4/16	4/16	4/16
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	1	1	1	1	1	1
RPM (High/Low stage)	810	810	810	810	810	810
Outdoor Horsepower	1/6	1/6	1/6	1/6	1/6	1/6
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3
Face Area (ft²)	19.0	19.0	19.0	19.0	19.0	19.0
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28
COMPRESSOR						
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	6.2 / 61.8	6.2 / 61.8	6.2 / 61.8	4.5 / 39.0	4.5 / 39.0	4.5 / 39.0
ELECTRICAL DATA						
Voltage-Phase-Frequency	460-3-60	460-3-60	460-3-60	575-3-60	575-3-60	575-3-60
Indoor Blower FLA	2.5	2.5	2.5	2	2	2
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	0.48	0.48	0.48	0.39	0.39	0.39
Min. Circuit Ampacity[1]	10.7	10.7	10.7	8.0	8.0	8.0
Max. Overcurrent Protection (A)[2]	15	15	15	15	15	15
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	647	647	647	647	647	647
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	705	705	705	705	705	705

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0601DL00001S	DHG0601DM00001S	DHG0601DH00001S	DHG0603DL00001S	DHG0603DM00001S	DHG0603DH00001S
COOLING CAPACITY						
Total BTU/H	59,000	59,000	59,000	59,000	59,000	59,000
SEER2 / EER2	16.2 / 12.2	16.2 / 12.2	16.2 / 12.2	16.2 / 12.2	16.2 / 12.2	16.2 / 12.2
AHRI Reference #	216019239	216019239	216019239	216019240	216019240	216019240
HEATING CAPACITY						
Heat Range	Low	Medium	High	Low	Medium	High
No. of Burners	3	5	6	3	5	6
High Stage Input / Output (KBTU/H)	70.0 / 56.7	115.0 / 93.2	140.0 / 113.4	70.0 / 56.7	115.0 / 93.2	140.0 / 113.4
Low Stage Input / Output (KBTU/H)	52.5 / 42.5	86.3 / 69.9	105.0 / 85.1	52.5 / 42.5	86.3 / 69.9	105.0 / 85.1
Thermal Efficiency (T.E.)	--	--	--	80	80	80
Annual Fuel Utilization Efficiency (AFUE)	81	81	81	--	--	--
Nox Emissions	40	40	40	40	40	40
High Stage Temperature Rise Range (°F)	25 - 55	35 - 65	35 - 65	25 - 55	35 - 65	35 - 65
Low Stage Temperature Rise Range (°F)	15 - 45	25 - 55	25 -55	15 - 45	35 - 65	25 -55
Static Pressure Range (In. W.C.)	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL						
Motor Type	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	1880	1880	1880	1880	1880	1880
RPM	1200	1200	1200	1200	1200	1200
Indoor Horsepower	1.0	1.0	1.0	1.0	1.0	1.0
Filter Size (in)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)
Drain Size (NPT)	¾	¾	¾	¾	¾	¾
R32 Refrigerant Charge (oz.)	100	100	100	100	100	100
Evaporator Coil Face Area (ft^2)	9.2	9.2	9.2	9.2	9.2	9.2
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	1	1	1	1	1	1
RPM (High/Low stage)	1000 / 750	1000 / 750	1000 / 750	1000 / 750	1000 / 750	1000 / 750
Outdoor Horsepower	1/3	1/3	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3
Face Area (ft^2)	19.0	19.0	19.0	19.0	19.0	19.0
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28
COMPRESSOR						
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	27.1 / 178.0	27.1 / 178.0	27.1 / 178.0	15.2 / 140.0	15.2 / 140.0	15.2 / 140.0
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-1-60	208/230-1-60	208/230-1-60	208/230-3-60	208/230-3-60	208/230-3-60
Indoor Blower FLA	6.9	6.9	6.9	6.9	6.9	6.9
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	2.6	2.6	2.6	2.6	2.6	2.6
Min. Circuit Ampacity[1]	43.3 / 43.3	43.3 / 43.3	43.3 / 43.3	28.5 / 28.5	28.5 / 28.5	28.5 / 28.5
Max. Overcurrent Protection (A)[2]	70 / 70	70 / 70	70 / 70	40 / 40	40 / 40	40 / 40
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	655	655	655	655	655	655
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	713	713	713	713	713	713

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0604DL00001S	DHG0604DM00001S	DHG0604DH00001S	DHG0607DL00001S	DHG0607DM00001S	DHG0607DH00001S
COOLING CAPACITY						
Total BTU/H	59,000	59,000	59,000	59,000	59,000	59,000
SEER2 / EER2	16.2 / 12.2	16.2 / 12.2	16.2 / 12.2	16.2 / 12.2	16.2 / 12.2	16.2 / 12.2
AHRI Reference #	216019241	216019241	216019241	216019242	216019242	216019242
HEATING CAPACITY						
Heat Range	Low	Medium	High	Low	Medium	High
No. of Burners	3	5	6	3	5	6
High Stage Input / Output (KBTU/H)	70.0 / 56.7	115.0 / 93.2	140.0 / 113.4	70.0 / 56.7	115.0 / 93.2	140.0 / 113.4
Low Stage Input / Output (KBTU/H)	52.5 / 42.5	86.3 / 69.9	105.0 / 85.1	52.5 / 42.5	86.3 / 69.9	105.0 / 85.1
Thermal Efficiency (T.E.)	80	80	80	80	80	80
Annual Fuel Utilization Efficiency (AFUE)	--	--	--	--	--	--
Nox Emissions	40	40	40	40	40	40
High Stage Temperature Rise Range (°F)	25 - 55	35 - 65	35 - 65	25 - 55	35 - 65	35 - 65
Low Stage Temperature Rise Range (°F)	15 - 45	35 - 65	25 -55	15 - 45	35 - 65	25 -55
Static Pressure Range (In. W.C.)	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL						
Motor Type	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	1880	1880	1880	1880	1880	1880
RPM	1500	1500	1500	1500	1500	1500
Indoor Horsepower	1.2	1.2	1.2	1.2	1.2	1.2
Filter Size (in)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)
Drain Size (NPT)	¾	¾	¾	¾	¾	¾
R32 Refrigerant Charge (oz.)	100	100	100	100	100	100
Evaporator Coil Face Area (ft^2)	9.2	9.2	9.2	9.2	9.2	9.2
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	1	1	1	1	1	1
RPM (High/Low stage)	1000 / 750	1000 / 750	1000 / 750	1000 / 750	1000 / 750	1000 / 750
Outdoor Horsepower	1/3	1/3	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3
Face Area (ft^2)	19.0	19.0	19.0	19.0	19.0	19.0
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28
COMPRESSOR						
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	7.4 / 54.7	7.4 / 54.7	7.4 / 54.7	5.6 / 47.8	5.6 / 47.8	5.6 / 47.8
ELECTRICAL DATA						
Voltage-Phase-Frequency	460-3-60	460-3-60	460-3-60	575-3-60	575-3-60	575-3-60
Indoor Blower FLA	2.5	2.5	2.5	2	2	2
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	1.6	1.6	1.6	1.14	1.14	1.14
Min. Circuit Ampacity[1]	13.3	13.3	13.3	10.2	10.2	10.2
Max. Overcurrent Protection (A)[2]	20	20	20	15	15	15
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	655	655	655	655	655	655
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	713	713	713	713	713	713

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0723DL00001S	DHG0723DM00001S	DHG0723DH00001S	DHG0724DL00001S	DHG0724DM00001S	DHG0724DH00001S
COOLING CAPACITY						
Total BTU/H	69,000	69,000	69,000	69,000	69,000	69,000
IEER/EER	18.6 / 12.5	18.6 / 12.5	18.6 / 12.5	18.6 / 12.5	18.6 / 12.5	18.6 / 12.5
AHRI Reference #	216019249	216019249	216019249	216019250	216019250	216019250
HEATING CAPACITY						
Heat Range	Low	Medium	High	Low	Medium	High
No. of Burners	3	5	6	3	5	6
High Stage Input / Output (KBTU/H)	70.0 / 56.7	125.0 / 101.3	150.0 / 121.5	70.0 / 56.7	125.0 / 101.3	150.0 / 121.5
Low Stage Input / Output (KBTU/H)	52.5 / 42.5	93.8 / 75.9	112.5 / 91.1	52.5 / 42.5	93.8 / 75.9	112.5 / 91.1
Thermal Efficiency (T.E.)	80	80	80	80	80	80
Annual Fuel Utilization Efficiency (AFUE)	--	--	--	--	--	--
Nox Emissions	NA	NA	NA	NA	NA	NA
High Stage Temperature Rise Range (°F)	25 - 55	35 - 65	35 - 65	25 - 55	35 - 65	35 - 65
Low Stage Temperature Rise Range (°F)	15 - 45	25 - 55	25 - 55	15 - 45	25 - 55	25 - 55
Static Pressure Range (In. W.C.)	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL						
Motor Type	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	2150	2150	2150	2150	2150	2150
RPM	1500	1500	1500	1500	1500	1500
Indoor Horsepower	1.2	1.2	1.2	1.2	1.2	1.2
Filter Size (in)	20 X 20 X 2 (4)	20 X 20 X 2 (4)	20 X 20 X 2 (4)	20 X 20 X 2 (4)	20 X 20 X 2 (4)	20 X 20 X 2 (4)
Drain Size (NPT)	¾	¾	¾	¾	¾	¾
R32 Refrigerant Charge (oz.)	142	142	142	142	142	142
Evaporator Coil Face Area (ft^2)	10.1	10.1	10.1	10.1	10.1	10.1
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	1	1	1	1	1	1
RPM (High/Low stage)	1122	1122	1122	1050	1050	1050
Outdoor Horsepower	1/3	1/3	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22 / 4	22 / 4	22 / 4	22 / 4	22 / 4	22 / 4
Face Area (ft^2)	24.1	24.1	24.1	24.1	24.1	24.1
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28
COMPRESSOR						
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	16.1 / 155.0	16.1 / 155.0	16.1 / 155.0	7.0 / 70.8	7.0 / 70.8	7.0 / 70.8
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-3-60	208/230-3-60	208/230-3-60	460-3-60	460-3-60	460-3-60
Indoor Blower FLA	5	5	5	2.5	2.5	2.5
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	2.0	2.0	2.0	0.85	0.85	0.85
Min. Circuit Ampacity[1]	27.2 / 27.2	27.2 / 27.2	27.2 / 27.2	12.2	12.2	12.2
Max. Overcurrent Protection (A)[2]	40 / 40	40 / 40	40 / 40	15	15	15
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	705	705	705	705	705	705
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	763	763	763	763	763	763

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0727DL00001S	DHG0727DM00001S	DHG0727DH00001S
COOLING CAPACITY			
Total BTU/H	69,000	69,000	69,000
IEER/EER	18.6 / 12.5	18.6 / 12.5	18.6 / 12.5
AHRI Reference #	216019251	216019251	216019251
HEATING CAPACITY			
Heat Range	Low	Medium	High
No. of Burners	3	5	6
High Stage Input / Output (KBTU/H)	70.0 / 56.7	125.0 / 101.3	150.0 / 121.5
Low Stage Input / Output (KBTU/H)	52.5 / 42.5	93.8 / 75.9	112.5 / 91.1
Thermal Efficiency (T.E.)	80	80	80
Annual Fuel Utilization Efficiency (AFUE)	--	--	--
Nox Emissions	NA	NA	NA
High Stage Temperature Rise Range (°F)	25 - 55	35 - 65	35 - 65
Low Stage Temperature Rise Range (°F)	15 - 45	25 - 55	25 - 55
Static Pressure Range (In. W.C.)	0.12 - 0.80	0.20 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL			
Motor Type	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	2150	2150	2150
RPM	1500	1500	1500
Indoor Horsepower	1.2	1.2	1.2
Filter Size (in)	20 X 20 X 2 (4)	20 X 20 X 2 (4)	20 X 20 X 2 (4)
Drain Size (NPT)	¾	¾	¾
R32 Refrigerant Charge (oz.)	142	142	142
Evaporator Coil Face Area (ft^2)	10.1	10.1	10.1
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL			
Quantity of Condenser Fan Motors	1	1	1
RPM (High/Low stage)	1050	1050	1050
Outdoor Horsepower	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22 / 4	22 / 4	22 / 4
Face Area (ft^2)	24.1	24.1	24.1
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28
COMPRESSOR			
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	6.0 / 58.2	6.0 / 58.2	6.0 / 58.2
ELECTRICAL DATA			
Voltage-Phase-Frequency	575-3-60	575-3-60	575-3-60
Indoor Blower FLA	2	2	2
Max External Static (In. W.C.)	0.8	0.8	0.8
Outdoor Fan FLA	0.67	0.67	0.67
Min. Circuit Ampacity[1]	10.2	10.2	10.2
Max. Overcurrent Protection (A)[2]	15	15	15
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)			
Operating Weight (lbs)	705	705	705
SHIPPING WEIGHT (LBS.)			
Ship Weight (lbs)	763	763	763

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0361D600001F	DHG0361D800001F	DHG0361D100001F	DHG0363D600001F	DHG0363D800001F	DHG0363D100001F
COOLING CAPACITY						
Total BTU/H	35,000	35,000	35,000	35,000	35,000	35,000
SEER2 / EER2	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5
AHRI Reference #	216019231	216019231	216019231	216019232	216019232	216019232
HEATING CAPACITY						
Heat Range	Low	Medium	High	Low	Medium	High
No. of Burners	3	4	5	3	4	5
High Stage Input / Output (KBTU/H)	60.0 / 48.6	80.0 / 64.8	100.0 / 81.0	60.0 / 48.6	80.0 / 64.8	100.0 / 81.0
Low Stage Input / Output (KBTU/H)	--	--	--	--	--	--
Thermal Efficiency (T.E.)	--	--	--	81	81	81
Annual Fuel Utilization Efficiency (AFUE)	81	81	81	--	--	--
Nox Emissions	14	14	14	14	14	14
High Stage Temperature Rise Range (°F)	30 - 60	35 - 65	30 - 60	30 - 60	35 - 65	30 - 60
Low Stage Temperature Rise Range (°F)	--	--	--	--	--	--
Static Pressure Range (In. W.C.)	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL						
Motor Type	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	Standard	Standard	Standard	Standard	Standard	Standard
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	1200	1200	1200	1200	1200	1200
Motor Speed Tap Cooling (High/Low stage)	T3/T1	T3/T1	T3/T1	T3/T1	T3/T1	T3/T1
Motor Speed Tap Heating (High/Low stage)	T3/T2	T3/T2	T3/T2	T3/T2	T3/T2	T3/T2
RPM	1200	1200	1200	1200	1200	1200
Indoor Horsepower	0.75	0.75	0.75	0.75	0.75	0.75
Filter Size (in)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)
Drain Size (NPT)	3/4	3/4	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	82	82	82	82	82	82
Evaporator Coil Face Area (ft^2)	7.3	7.3	7.3	7.3	7.3	7.3
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	1	1	1	1	1	1
RPM (High/Low stage)	810	810	810	810	810	810
Outdoor Horsepower	0.17	0.17	0.17	0.17	0.17	0.17
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3
Face Area (ft^2)	12.5	12.5	12.5	12.5	12.5	12.5
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28
COMPRESSOR						
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	15.3 / 83.0	15.3 / 83.0	15.3 / 83.0	11.6 / 73.0	11.6 / 73.0	11.6 / 73.0
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-1-60	208/230-1-60	208/230-1-60	208/230-3-60	208/230-3-60	208/230-3-60
Indoor Blower FLA	5.7	5.7	5.7	5.7	5.7	5.7
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	0.95	0.95	0.95	0.95	0.95	0.95
Min. Circuit Ampacity[1]	25.7 / 25.7	25.7 / 25.7	25.7 / 25.7	21.2 / 21.2	21.2 / 21.2	21.2 / 21.2
Max. Overcurrent Protection (A)[2]	40 /40	40 /40	40 /40	30 / 30	30 / 30	30 / 30
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	572	572	572	572	572	572
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	630	630	630	630	630	630

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0364D600001F	DHG0364D800001F	DHG0364D100001F	DHG0481D800001F	DHG0481D100001F	DHG0483D800001F
COOLING CAPACITY						
Total BTU/H	35,000	35,000	35,000	46,000	46,000	46,000
SEER2 / EER2	16.6 / 12.5	16.6 / 12.5	16.6 / 12.5	16.4 / 12.2	16.4 / 12.2	16.4 / 12.2
AHRI Reference #	216019233	216019233	216019233	216019235	216019235	216019235
HEATING CAPACITY						
Heat Range	Low	Medium	High	Medium	High	Medium
No. of Burners	3	4	5	4	5	4
High Stage Input / Output (KBTU/H)	60.0 / 48.6	80.0 / 64.8	100.0 / 81.0	80.0 / 64.8	100.0 / 81.0	80.0 / 64.8
Low Stage Input / Output (KBTU/H)	--	--	--	--	--	--
Thermal Efficiency (T.E.)	81	81	81	--	--	81
Annual Fuel Utilization Efficiency (AFUE)	--	--	--	81	81	--
Nox Emissions	14	14	14	14	14	14
High Stage Temperature Rise Range (°F)	25 - 55	30 - 60	30 - 60	30 - 60	40 - 70	30 - 60
Low Stage Temperature Rise Range (°F)	--	--	--	--	--	--
Static Pressure Range (In. W.C.)	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL						
Motor Type	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	1160	1160	1160	1460	1460	1460
Motor Speed Tap Cooling (High/Low stage)	T3/T1	T3/T1	T3/T1	T3/T1	T3/T1	T3/T1
Motor Speed Tap Heating (High/Low stage)	T3/T2	T3/T2	T3/T2	T3/T2	T3/T2	T3/T2
RPM	1500	1500	1500	1200	1200	1200
Indoor Horsepower	1.2	1.2	1.2	1.0	1.0	1.0
Filter Size (in)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)
Drain Size (NPT)	3/4	3/4	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	82	82	82	91	91	91
Evaporator Coil Face Area (ft^2)	7.3	7.3	7.3	7.3	7.3	7.3
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	1	1	1	1	1	1
RPM (High/Low stage)	810	810	810	810	810	810
Outdoor Horsepower	1/6	1/6	1/6	1/6	1/6	1/6
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3
Face Area (ft^2)	12.5	12.5	12.5	19.0	19.0	19.0
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28
COMPRESSOR						
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	4.2 / 44.3	4.2 / 44.3	4.2 / 44.3	23.2 / 128	23.2 / 128	12.0 / 105
ELECTRICAL DATA						
Voltage-Phase-Frequency	460-3-60	460-3-60	460-3-60	208/230-1-60	208/230-1-60	208/230-3-60
Indoor Blower FLA	2.5	2.5	2.5	6.9	6.9	6.9
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	0.48	0.48	0.48	0.95	0.95	0.95
Min. Circuit Ampacity[1]	8.2	8.2	8.2	36.9 / 36.9	36.9 / 36.9	22.8 / 22.8
Max. Overcurrent Protection (A)[2]	15	15	15	60 / 60	60 / 60	30 / 30
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	572	572	572	647	647	647
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	630	630	630	705	705	705

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0483D100001F	DHG0484D800001F	DHG0484D100001F	DHG0601D800001F	DHG0601D100001F	DHG0603D800001F
COOLING CAPACITY						
Total BTU/H	46,000	46,000	46,000	59,000	59,000	59,000
SEER2 / EER2	16.4 / 12.2	16.4 / 12.2	16.4 / 12.2	16.2 / 12.2	16.2 / 12.2	16.2 / 12.2
AHRI Reference #	216019236	216019237	216019237	216019239	216019239	216019240
HEATING CAPACITY						
Heat Range	High	Medium	High	Medium	High	Medium
No. of Burners	5	4	5	4	5	4
High Stage Input / Output (KBTU/H)	100.0 / 81.0	80.0 / 64.8	100.0 / 81.0	80.0 / 64.8	100.0 / 81.0	80.0 / 64.8
Low Stage Input / Output (KBTU/H)	--	--	--	--	--	--
Thermal Efficiency (T.E.)	81	81	81	--	--	81
Annual Fuel Utilization Efficiency (AFUE)	--	--	--	81	81	--
Nox Emissions	14	14	14	14	14	14
High Stage Temperature Rise Range (°F)	40 - 70	30 - 60	40 - 70	30 - 60	35 - 65	30 - 60
Low Stage Temperature Rise Range (°F)	--	--	--	--	--	--
Static Pressure Range (In. W.C.)	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL						
Motor Type	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	1460	1460	1460	1880	1880	1880
Motor Speed Tap Cooling (High/Low stage)	T3/T1	T3/T1	T3/T1	T3/T1	T3/T1	T3/T1
Motor Speed Tap Heating (High/Low stage)	T3/T2	T3/T2	T3/T2	T3/T2	T3/T2	T3/T2
RPM	1200	1500	1500	1200	1200	1200
Indoor Horsepower	1.0	1.2	1.2	1.0	1.0	1.0
Filter Size (in)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (4)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)
Drain Size (NPT)	3/4	3/4	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	91	91	91	100	100	100
Evaporator Coil Face Area (ft^2)	7.3	7.3	7.3	9.2	9.2	9.2
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	1	1	1	1	1	1
RPM (High/Low stage)	810	810	810	1000 / 750	1000 / 750	1000 / 750
Outdoor Horsepower	1/6	1/6	1/6	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3	22 / 3
Face Area (ft^2)	19.0	19.0	19.0	19.0	19.0	19.0
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28	2 / 28
COMPRESSOR						
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	12.0 / 105	6.2 / 61.8	6.2 / 61.8	27.1 / 178.0	27.1 / 178.0	15.2 / 140.0
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-3-60	460-3-60	460-3-60	208/230-1-60	208/230-1-60	208/230-3-60
Indoor Blower FLA	6.9	2.5	2.5	6.9	6.9	6.9
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	0.95	0.48	0.48	2.6	2.6	2.6
Min. Circuit Ampacity[1]	22.8 / 22.8	10.7	10.7	43.3 / 43.3	43.3 / 43.3	28.5 / 28.5
Max. Overcurrent Protection (A)[2]	30 / 30	15	15	70 / 70	70 / 70	40 / 40
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	647	647	647	655	655	655
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	705	705	705	713	713	713

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0603D100001F	DHG0604D800001F	DHG0604D100001F
COOLING CAPACITY			
Total BTU/H	59,000	59,000	59,000
SEER2 / EER2	16.2 / 12.2	16.2 / 12.2	16.2 / 12.2
AHRI Reference #	216019240	216019241	216019241
HEATING CAPACITY			
Heat Range	High	Medium	High
No. of Burners	5	4	5
High Stage Input / Output (KBTU/H)	100.0 / 81.0	80.0 / 64.8	100.0 / 81.0
Low Stage Input / Output (KBTU/H)	--	--	--
Thermal Efficiency (T.E.)	81	81	81
Annual Fuel Utilization Efficiency (AFUE)	--	--	--
Nox Emissions	14	14	14
High Stage Temperature Rise Range (°F)	35 - 65	30 - 60	35 - 65
Low Stage Temperature Rise Range (°F)	--	--	--
Static Pressure Range (In. W.C.)	0.20 - 0.80	0.20 - 0.80	0.20 - 0.80
EVAPORATOR MOTOR COIL			
Motor Type	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	0.8	0.8	0.8
Wheel Dia. X Width	12 x 11	12 x 11	12 x 11
Indoor Nominal CFM	1880	1880	1880
RPM	T3/T1	T3/T1	T3/T1
Motor Speed Tap Cooling (High/Low stage)	T3/T2	T3/T2	T3/T2
Motor Speed Tap Heating (High/Low stage)	1200	1500	1500
Indoor Horsepower	1.0	1.2	1.2
Filter Size (in)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)	14 X 20 X 2 (2) 20 X 20 X 2 (2)
Drain Size (NPT)	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	100	100	100
Evaporator Coil Face Area (ft^2)	9.2	9.2	9.2
Rows Deep/ Fins per Inch	$^4/_{16}$	$^4/_{16}$	$^4/_{16}$
CONDENSER FAN/COIL			
Quantity of Condenser Fan Motors	1	1	1
RPM (High/Low stage)	1000 / 750	1000 / 750	1000 / 750
Outdoor Horsepower	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3
Face Area (ft^2)	19.0	19.0	19.0
Rows Deep / Fins per Inch	2 / 28	2 / 28	2 / 28
COMPRESSOR			
Quantity / Type / Stages	1 / Scroll / 2	1 / Scroll / 2	1 / Scroll / 2
Compressor RLA / LRA	15.2 / 140.0	7.4 / 54.7	7.4 / 54.7
ELECTRICAL DATA			
Voltage-Phase-Frequency	208/230-3-60	460-3-60	460-3-60
Indoor Blower FLA	6.9	2.5	2.5
Max External Static (In. W.C.)	0.8	0.8	0.8
Outdoor Fan FLA	2.6	1.6	1.6
Min. Circuit Ampacity[1]	28.5 / 28.5	13.3	13.3
Max. Overcurrent Protection (A)[2]	40 / 40	20	20
Power Supply Conduit Hole Dia. (in)	1.125	1.125	1.125
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)			
655	655	655	705
SHIPPING WEIGHT (LBS.)			
Ship Weight (lbs)	713	713	713

[1] Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.
[2] May use fuses or HACR-type circuit breakers of the same size as noted.
Note: Always check the S&R plate for electrical data on the unit being installed.

Coil Dimensions

Model	Tons	Fin height in.	Fin length in.
DHG	3	27.71	38.07
	4	27.71	38.07
	5	34.64	38.07
	6	38.10	38.07

AHRI Ratings

MODEL	CAPACITY	EER2	SEER2	EER	IEER
DHG036*D	35,000	12.50	16.60	N/A	N/A
DHG048*D	46,000	12.20	16.40	N/A	N/A
DHG060*D	59,000	12.20	16.20	N/A	N/A
DHG072*D	69,000	N/A	N/A	12.5	18.60

Sound Data

STATIC PRESSURE	036*D TON SOUND (DB) AT 60 HZ										
	INDOOR CFM	COMPONET	A-WEIGHTED	63	125	250	500	1000	2000	4000	8000
0.8	1,160	Discharge	67	83.1	78.4	65.6	60.2	58.3	55.4	54.8	48.2
		Inlet	62	82.4	75.9	59.4	54.9	52.3	47.3	45.7	40.8
1.8		Discharge	77	87.3	86.5	76.4	71.3	70.6	65.1	65.5	62.1
		Inlet	69	83.7	81.6	69.5	64.5	62.0	57.6	57.8	55.8
N/A	N/A	Outdoor	71	-	75.5	70.1	69.8	66.0	61.0	53.7	44.3

STATIC PRESSURE	048*D TON SOUND (DB) AT 60 HZ										
	INDOOR CFM	COMPONET	A-WEIGHTED	63	125	250	500	1000	2000	4000	8000
0.8	1460	Discharge	72	96.4	84.2	68.7	62.8	60.8	56.4	56.2	50.9
		Inlet	68	88.6	80.8	66.2	59.1	55.3	49.7	48.1	44.2
1.8		Discharge	75	96.3	82.9	75.0	70.5	67.4	63.7	64.0	60.2
		Inlet	68	87.5	78.6	69.9	62.9	60.6	56.1	56.1	53.2
N/A	N/A	Outdoor	72	-	83.1	70.1	69.2	65.9	60.4	56.3	44.4

STATIC PRESSURE	060*D TON SOUND (DB) AT 60 HZ										
	INDOOR CFM	COMPONET	A-WEIGHTED	63	125	250	500	1000	2000	4000	8000
0.8	1880	Discharge	76	99.1	83.9	76.8	70.5	67.9	63.9	64.1	60.1
		Inlet	69	84.8	79.3	74.8	62.9	60.7	55.9	55.9	52.6
1.8		Discharge	80	93.5	87.8	82.6	76.7	73.1	68.9	68.9	66.3
		Inlet	73	88.6	84.6	74.0	68.0	65.5	61.9	61.5	58.7
N/A	N/A	Outdoor	74	-	78.2	73.9	71.2	68.8	64.0	59.6	52.1

STATIC PRESSURE	072*D TON SOUND (DB) AT 60 HZ										
	INDOOR CFM	COMPONET	A-WEIGHTED	63	125	250	500	1000	2000	4000	8000
0.8	2150	Discharge	65	82.6	74.9	63.9	60.8	56.2	53.9	53.1	47.9
		Inlet	61	76.2	73.3	60.1	57.0	54.0	50.1	44.1	41.0
1.8		Discharge	76	93.4	87.2	77.4	71.2	67.5	64.0	64.3	60.2
		Inlet	70	86.0	83.9	70.0	64.3	62.1	56.5	55.5	52.6
N/A	N/A	Outdoor	80	-	78.2	76.2	77.8	74.3	71.9	66.1	59.4

STATIC PRESSURE	036*W TON SOUND (DB) AT 60 HZ										
	INDOOR CFM	COMPONET	A-WEIGHTED	63	125	250	500	1000	2000	4000	8000
0.8	1,160	Discharge	67	83.1	78.4	65.6	60.2	58.3	55.4	54.8	48.2
		Inlet	62	82.4	75.9	59.4	54.9	52.3	47.3	45.7	40.8
1.8		Discharge	77	87.3	86.5	76.4	71.3	70.6	65.1	65.5	62.1
		Inlet	69	83.7	81.6	69.5	64.5	62.0	57.6	57.8	55.8
N/A	N/A	Outdoor	75	-	85.4	74.4	71.8	69.1	65.8	60.9	59.2

STATIC PRESSURE	048*W TON SOUND (DB) AT 60 HZ										
	INDOOR CFM	COMPONET	A-WEIGHTED	63	125	250	500	1000	2000	4000	8000
0.8	1460	Discharge	72	96.4	84.2	68.7	62.8	60.8	56.4	56.2	50.9
		Inlet	68	88.6	80.8	66.2	59.1	55.3	49.7	48.1	44.2
1.8		Discharge	75	96.3	82.9	75.0	70.5	67.4	63.7	64.0	60.2
		Inlet	68	87.5	78.6	69.9	62.9	60.6	56.1	56.1	53.2
N/A	N/A	Outdoor	77	-	83.2	73.7	72.4	70.5	69.3	65.9	64.8

STATIC PRESSURE	060*W TON SOUND (DB) AT 60 HZ										
	INDOOR CFM	COMPONET	A-WEIGHTED	63	125	250	500	1000	2000	4000	8000
0.8	1880	Discharge	76	99.1	83.9	76.8	70.5	67.9	63.9	64.1	60.1
		Inlet	69	84.8	79.3	74.8	62.9	60.7	55.9	55.9	52.6
1.8		Discharge	80	93.5	87.8	82.6	76.7	73.1	68.9	68.9	66.3
		Inlet	73	88.6	84.6	74.0	68.0	65.5	61.9	61.5	58.7
N/A	N/A	Outdoor	79	-	89.4	78.7	74.3	71.9	68.0	64.8	63.5

STATIC PRESSURE	072*W TON SOUND (DB) AT 60 HZ										
	INDOOR CFM	COMPONET	A-WEIGHTED	63	125	250	500	1000	2000	4000	8000
0.8	2150	Discharge	65	82.6	74.9	63.9	60.8	56.2	53.9	53.1	47.9
		Inlet	61	76.2	73.3	60.1	57.0	54.0	50.1	44.1	41.0
1.8		Discharge	76	93.4	87.2	77.4	71.2	67.5	64.0	64.3	60.2
		Inlet	70	86.0	83.9	70.0	64.3	62.1	56.5	55.5	52.6
N/A	N/A	Outdoor	81	-	81.7	81.2	77.7	75.4	72.2	70.1	67.7


Notes:

[1] Outdoor sound data measured in accordance with AHRI standard 230.


[2] Discharge and Inlet sound data measured in accordanced with AHRI standard 260.

[3] Measurements expressed in terms of sound power. Do not compare these values to sound pressure values because sound pressure depends on specific environment factors which normally do not match individual applications. Sound power values are independent of the environment and therefore more accurate.


[4] A-weighted sound ratings filter out high and very low frequencies, to better approximate the response of "average"human ear. A-weighted measurements for Daikin units are taken in accordance with AHRI standards 230 and 260.

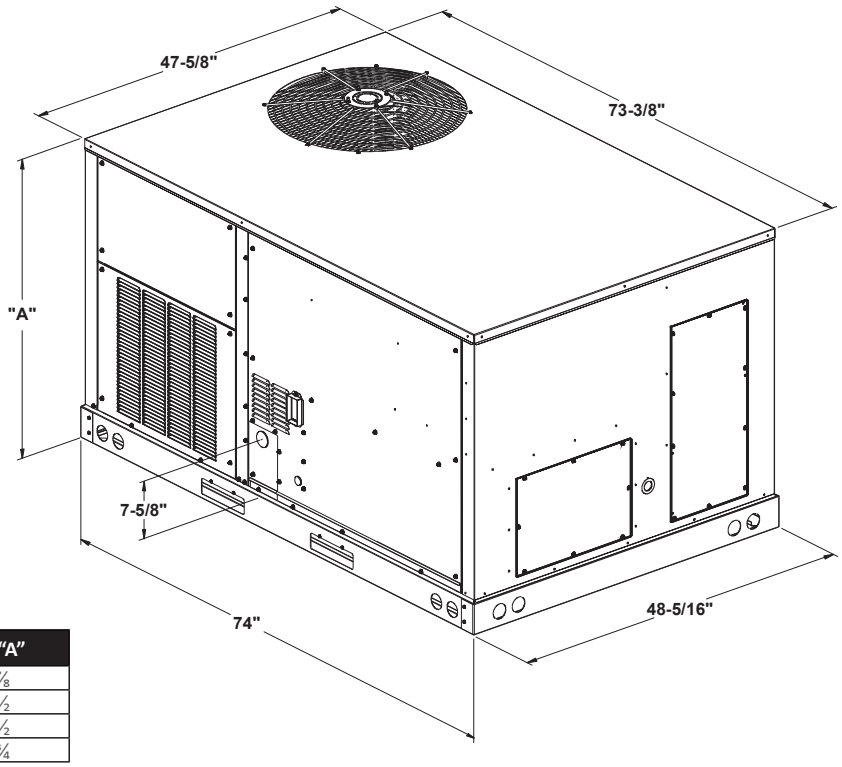

Model Size	DIM "A"
3 Ton	39⅞
4 Ton	43½
5 Ton	43½
6 ton	53¾

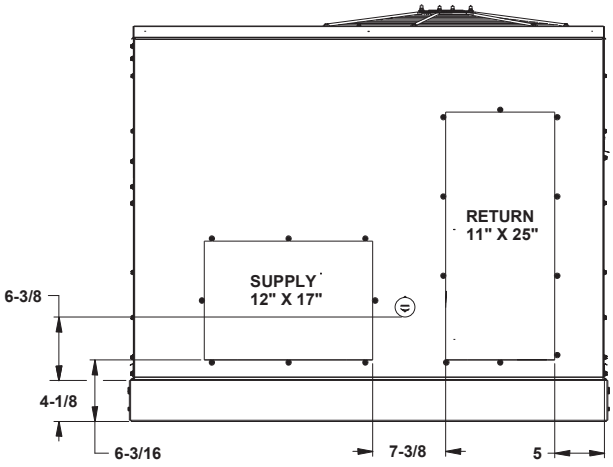



HORIZONTAL DISCHARGE

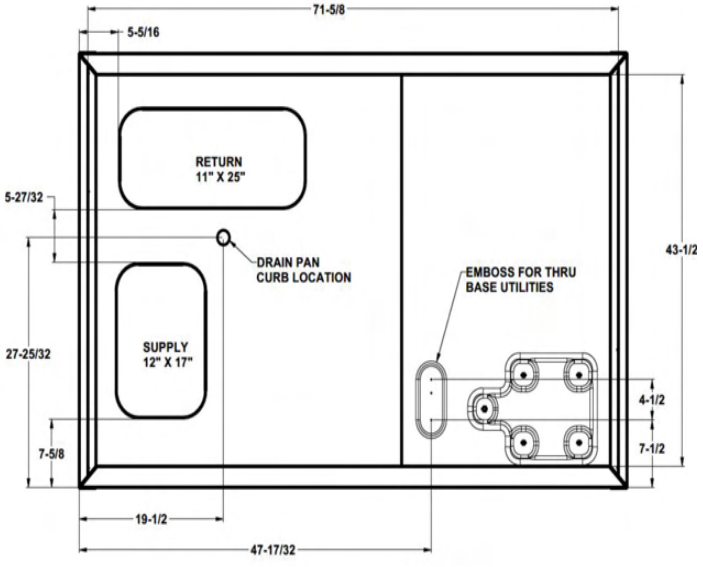


BOTTOM VIEW OF UNIT
VERTICAL DISCHARGE


Light Commercial Base Rails

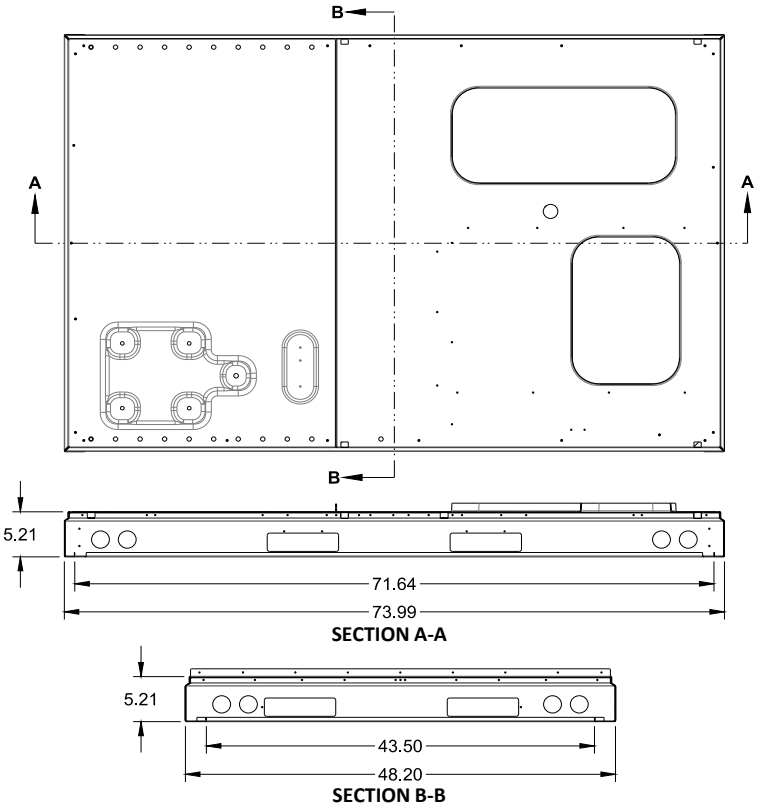





SECTION A-A
RAIL DETAIL



SECTION B-B
RAIL DETAIL

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	900	MBh	35.1	35.6	36.7	-	34.8	35.3	36.4	-	33.9	34.4	35.4	-	32.3	32.8	33.8	-	30.3	30.8	31.9	-	28.5	29.0	30.1	-
		S/T	0.59	0.53	0.42	-	0.59	0.53	0.42	-	0.62	0.55	0.44	-	0.64	0.57	0.45	-	0.67	0.60	0.48	-	0.75	0.68	0.54	-
		ΔT	20.87	19.04	15.62	-	20.82	18.99	15.57	-	21.07	19.24	15.82	-	20.80	18.97	15.55	-	20.55	18.72	15.30	-	21.70	19.87	16.45	-
		kW	1.96	1.96	1.95	-	2.20	2.20	2.19	-	2.47	2.47	2.47	-	2.77	2.77	2.76	-	3.10	3.09	3.09	-	3.48	3.48	3.48	-
		Amps	7.28	7.27	7.25	-	8.34	8.33	8.31	-	9.52	9.51	9.50	-	10.80	10.79	10.78	-	12.23	12.22	12.21	-	13.91	13.90	13.88	-
		Hi PR	253	254	256	-	294	295	297	-	336	337	339	-	381	382	384	-	430	431	433	-	483	484	485	-
		Lo PR	128	129	133	-	136	137	140	-	140	144	147	-	140	146	153	-	141	146	155	-	138	143	152	-
	1160	MBh	35.9	36.4	37.5	-	35.6	36.1	37.2	-	34.7	35.2	36.2	-	33.1	33.6	34.6	-	31.1	31.6	32.7	-	29.3	29.8	30.9	-
		S/T	0.66	0.59	0.46	-	0.67	0.59	0.46	-	0.70	0.62	0.48	-	0.72	0.64	0.49	-	0.75	0.67	0.51	-	0.85	0.76	0.59	-
		ΔT	18.69	16.86	13.44	-	18.64	16.81	13.39	-	18.89	17.06	13.65	-	18.62	16.79	13.37	-	18.37	16.54	13.13	-	19.52	17.69	14.27	-
		kW	1.98	1.98	1.98	-	2.23	2.22	2.22	-	2.50	2.50	2.49	-	2.79	2.79	2.79	-	3.12	3.12	3.12	-	3.51	3.51	3.50	-
		Amps	7.39	7.38	7.36	-	8.45	8.44	8.42	-	9.63	9.62	9.60	-	10.91	10.90	10.88	-	12.34	12.33	12.31	-	14.02	14.01	13.99	-
		Hi PR	257	259	260	-	298	299	301	-	340	341	343	-	385	386	388	-	434	435	437	-	487	488	490	-
		Lo PR	131	133	136	-	139	140	144	-	146	147	151	-	146	151	156	-	147	152	161	-	144	149	158	-
	1500	MBh	37.4	37.9	39.0	-	37.1	37.6	38.7	-	36.2	36.7	37.7	-	34.6	35.1	36.1	-	32.6	33.1	34.2	-	30.8	31.3	32.4	-
		S/T	0.73	0.65	0.48	-	0.74	0.65	0.48	-	0.77	0.68	0.51	-	0.79	0.69	0.52	-	0.83	0.72	0.54	-	0.94	0.83	0.62	-
		ΔT	16.66	14.83	11.41	-	16.61	14.78	11.36	-	16.87	15.04	11.62	-	16.59	14.76	11.34	-	16.35	14.52	11.10	-	17.49	15.66	12.25	-
		kW	2.00	2.00	2.00	-	2.25	2.25	2.24	-	2.52	2.52	2.51	-	2.82	2.81	2.81	-	3.14	3.14	3.14	-	3.53	3.53	3.52	-
		Amps	7.49	7.48	7.46	-	8.55	8.54	8.52	-	9.73	9.72	9.70	-	11.01	11.00	10.98	-	12.44	12.43	12.41	-	14.12	14.11	14.09	-
		Hi PR	262	264	265	-	303	304	306	-	345	346	348	-	390	391	393	-	439	440	442	-	492	493	495	-
		Lo PR	136	138	141	-	144	146	149	-	150	153	156	-	149	157	162	-	150	158	168	-	149	155	164	-
75	900	MBh	35.3	35.8	36.9	38.5	35.0	35.5	36.6	38.2	34.1	34.6	35.6	37.3	32.5	33.0	34.0	35.7	30.5	31.0	32.1	33.7	28.7	29.2	30.3	31.9
		S/T	0.70	0.64	0.53	0.4	0.70	0.64	0.53	0.4	0.73	0.67	0.55	0.4	0.76	0.69	0.57	0.4	0.80	0.73	0.60	0.5	0.89	0.81	0.67	0.5
		ΔT	24.89	23.06	19.64	16.1	24.84	23.01	19.59	16.1	25.10	23.27	19.85	16.3	24.82	22.99	19.57	16.0	24.58	22.75	19.33	15.8	25.72	23.89	20.47	16.9
		kW	1.96	1.95	1.95	2.0	2.20	2.20	2.19	2.2	2.47	2.47	2.47	2.5	2.77	2.76	2.76	2.8	3.09	3.09	3.09	3.1	3.48	3.48	3.47	3.5
		Amps	7.27	7.26	7.24	7.3	8.33	8.32	8.30	8.4	9.51	9.51	9.49	9.6	10.80	10.79	10.77	10.8	12.23	12.22	12.20	12.3	13.90	13.90	13.88	14.0
		Hi PR	254	255	256	260.9	294	295	297	301.2	336	337	339	343.4	382	383	384	388.9	430	432	433	437.9	483	484	486	490.1
		Lo PR	128	129	133	138.1	136	137	140	145.9	139	144	147	152.8	139	147	153	158.6	140	149	158	164.3	139	146	154	165.0
	1160	MBh	36.1	36.6	37.7	39.3	35.8	36.3	37.3	39.0	34.8	35.4	36.4	38.0	33.2	**33.8**	34.8	36.4	31.3	31.8	32.9	34.5	29.5	30.0	31.1	32.7
		S/T	0.80	0.73	0.59	0.5	0.81	0.73	0.59	0.5	0.84	0.76	0.62	0.5	0.87	**0.79**	0.64	0.5	0.91	0.83	0.67	0.5	1.00	0.92	0.75	0.6
		ΔT	22.71	20.88	17.46	13.9	22.66	20.83	17.41	13.9	22.92	21.09	17.67	14.1	22.64	**20.81**	17.39	13.9	22.40	20.57	17.15	13.6	23.13	21.71	18.30	14.8
		kW	1.98	1.98	1.97	2.0	2.22	2.22	2.22	2.2	2.50	2.49	2.49	2.5	2.79	**2.79**	2.78	2.8	3.12	3.12	3.11	3.1	3.51	3.50	3.50	3.5
		Amps	7.38	7.37	7.35	7.4	8.44	8.43	8.41	8.5	9.62	9.61	9.60	9.7	10.90	**10.90**	10.88	11.0	12.33	12.33	12.31	12.4	14.01	14.00	13.99	14.1
		Hi PR	258	259	261	265.0	298	299	301	305.3	340	341	343	347.5	386	**387**	388	392.9	435	436	437	441.9	487	488	490	494.2
		Lo PR	131	133	136	141.4	139	140	144	149.3	139	147	151	156.1	139	**153**	156	162.0	139	155	162	167.7	148	152	160	170.9
	1500	MBh	37.6	38.1	39.2	40.8	37.3	37.8	38.8	40.5	36.3	36.9	37.9	39.5	34.7	35.3	36.3	37.9	32.8	33.3	34.4	36.0	31.0	31.5	32.6	34.2
		S/T	0.91	0.82	0.65	0.5	0.91	0.82	0.65	0.5	0.95	0.85	0.68	0.5	0.98	0.88	0.70	0.5	1.00	0.92	0.73	0.5	1.00	1.00	0.82	0.6
		ΔT	20.69	18.85	15.44	11.9	20.64	18.80	15.39	11.8	20.89	19.06	15.64	12.1	20.62	18.79	15.37	11.8	19.87	18.54	15.12	11.6	18.79	19.10	16.27	12.7
		kW	2.00	2.00	2.00	2.0	2.25	2.25	2.24	2.3	2.52	2.52	2.51	2.5	2.81	2.81	2.81	2.8	3.14	3.14	3.14	3.2	3.53	3.53	3.52	3.5
		Amps	7.48	7.47	7.45	7.5	8.54	8.53	8.51	8.6	9.72	9.71	9.70	9.8	11.00	11.00	10.98	11.1	12.43	12.43	12.41	12.5	14.11	14.10	14.09	14.2
		Hi PR	263	264	266	270.0	303	304	306	310.3	345	346	348	352.5	391	392	393	397.9	440	441	442	446.9	492	493	495	499.2
		Lo PR	136	138	141	146.8	139	146	149	154.7	139	153	156	161.5	139	159	162	167.4	139	160	168	173.1	160	162	167	177.6

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	900	MBh	35.5	36.0	37.1	38.7	35.2	35.7	36.7	38.4	34.2	34.7	35.8	37.4	32.6	33.1	34.2	35.8	30.7	31.2	32.3	33.9	28.9	29.4	30.5	32.1
		S/T	0.81	0.75	0.63	0.5	0.81	0.75	0.64	0.5	0.84	0.78	0.66	0.5	0.88	0.81	0.68	0.6	0.92	0.85	0.72	0.6	1.00	0.94	0.80	0.6
		ΔT	28.94	27.11	23.69	20.2	28.89	27.06	23.64	20.1	29.15	27.32	23.90	20.4	28.87	27.04	23.63	20.1	28.63	26.80	23.38	19.8	29.20	27.94	24.53	21.0
		kW	1.96	1.95	1.95	2.0	2.20	2.20	2.19	2.2	2.47	2.47	2.47	2.5	2.77	2.77	2.76	2.8	3.10	3.09	3.09	3.1	3.48	3.48	3.48	3.5
		Amps	7.28	7.27	7.25	7.3	8.34	8.33	8.31	8.4	9.52	9.51	9.49	9.6	10.80	10.79	10.77	10.9	12.23	12.22	12.20	12.3	13.91	13.90	13.88	14.0
		Hi PR	254	255	257	261.4	294	295	297	301.7	337	338	339	343.9	382	383	385	389.3	431	432	434	438.3	483	484	486	490.6
		Lo PR	127	130	133	138.6	127	138	141	146.5	127	145	148	153.4	128	150	154	159.2	127	151	159	164.9	145	148	157	168.1
	1160	MBh	36.3	36.8	37.8	39.5	36.0	36.5	37.5	39.2	35.0	35.5	36.6	38.2	33.4	33.9	**35.0**	36.6	31.5	32.0	33.0	34.7	29.7	30.2	31.3	32.9
		S/T	0.94	0.86	0.73	0.6	0.95	0.87	0.73	0.6	0.98	0.90	0.76	0.6	1.00	0.93	**0.78**	0.6	1.00	0.98	0.82	0.6	1.00	1.00	0.91	0.7
		ΔT	26.76	24.93	21.51	18.0	26.71	24.88	21.46	17.9	26.97	25.14	21.72	18.2	26.20	24.86	**21.45**	17.9	24.67	24.62	21.20	17.7	23.27	23.66	22.35	18.8
		kW	1.98	1.98	1.98	2.0	2.23	2.22	2.22	2.2	2.50	2.50	2.49	2.5	2.79	2.79	**2.79**	2.8	3.12	3.12	3.12	3.1	3.51	3.51	3.50	3.5
		Amps	7.39	7.38	7.36	7.4	8.45	8.44	8.42	8.5	9.63	9.62	9.60	9.7	10.91	10.90	**10.88**	11.0	12.34	12.33	12.31	12.4	14.02	14.01	13.99	14.1
		Hi PR	258	259	261	265.5	298	300	301	305.7	341	342	343	347.9	386	387	**389**	393.4	435	436	438	442.4	487	488	490	494.6
		Lo PR	128	133	136	142.0	128	141	144	149.8	128	148	151	156.7	152	152	**157**	162.5	128	152	163	168.2	161	152	163	174.1
	1500	MBh	37.8	38.3	39.3	41.0	37.5	38.0	39.0	40.7	36.5	37.0	38.1	39.7	34.9	35.4	36.5	38.1	33.0	33.5	34.5	36.2	31.2	31.7	32.8	34.4
		S/T	1.00	0.99	0.82	0.6	1.00	0.99	0.82	0.6	1.00	1.00	0.85	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.92	0.7	1.00	1.00	1.00	0.8
		ΔT	22.90	22.91	19.49	15.9	22.70	22.86	19.44	15.9	22.14	22.45	19.70	16.2	21.17	21.48	19.42	15.9	19.99	20.29	19.18	15.6	18.90	19.21	19.85	16.8
		kW	2.00	2.00	2.00	2.0	2.25	2.25	2.24	2.3	2.52	2.52	2.51	2.5	2.82	2.81	2.81	2.8	3.14	3.14	3.14	3.2	3.53	3.53	3.52	3.5
		Amps	7.49	7.48	7.46	7.5	8.55	8.54	8.52	8.6	9.73	9.72	9.70	9.8	11.01	11.00	10.98	11.1	12.44	12.43	12.41	12.5	14.12	14.11	14.09	14.2
		Hi PR	263	264	266	270.5	303	305	306	310.8	346	347	349	353.0	391	392	394	398.4	440	441	443	447.4	492	493	495	499.7
		Lo PR	137	139	142	147.4	145	146	150	155.2	152	153	157	162.1	158	159	162	167.9	163	165	168	173.6	128	172	175	179.5
85	900	MBh	36.1	36.6	37.7	39.3	35.8	36.3	37.3	39.0	34.8	35.3	36.4	38.0	33.2	33.7	34.8	36.4	31.3	31.8	32.9	34.5	29.5	30.0	31.1	32.7
		S/T	0.89	0.83	0.72	0.6	0.90	0.84	0.72	0.6	0.93	0.87	0.75	0.6	0.97	0.90	0.77	0.6	1.00	0.95	0.81	0.7	1.00	1.00	0.90	0.7
		ΔT	32.54	30.71	27.29	23.7	32.49	30.66	27.24	23.7	32.74	30.91	27.49	24.0	32.47	30.64	27.22	23.7	31.61	30.39	26.97	23.4	29.80	30.31	28.12	24.6
		kW	1.96	1.96	1.96	2.0	2.21	2.20	2.20	2.2	2.48	2.48	2.47	2.5	2.77	2.77	2.77	2.8	3.10	3.10	3.09	3.1	3.49	3.48	3.48	3.5
		Amps	7.30	7.29	7.27	7.4	8.36	8.35	8.33	8.4	9.54	9.53	9.51	9.6	10.82	10.81	10.79	10.9	12.25	12.24	12.22	12.3	13.93	13.92	13.90	14.0
		Hi PR	255	256	258	262.6	296	297	298	302.9	338	339	341	345.1	383	384	386	390.5	432	433	435	439.5	484	486	487	491.8
		Lo PR	115	132	135	140.6	115	140	143	148.4	115	141	150	155.3	114	142	156	161.1	152	141	161	166.8	157	155	162	171.4
	1160	MBh	36.9	37.4	38.4	40.1	36.6	37.1	38.1	39.8	35.6	36.1	37.2	38.8	34.0	34.5	35.6	37.2	32.1	32.6	33.6	35.3	30.3	30.8	31.9	33.5
		S/T	1.00	0.97	0.83	0.7	1.00	0.98	0.84	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.90	0.7	1.00	1.00	0.94	0.8	1.00	1.00	1.00	0.9
		ΔT	28.90	28.53	25.11	21.6	28.65	28.48	25.06	21.5	27.93	28.32	25.32	21.8	26.67	27.07	25.04	21.5	25.14	25.53	24.80	21.3	23.74	24.13	24.97	22.4
		kW	1.99	1.98	1.98	2.0	2.23	2.23	2.22	2.2	2.50	2.50	2.50	2.5	2.80	2.79	2.79	2.8	3.13	3.12	3.12	3.1	3.51	3.51	3.51	3.5
		Amps	7.41	7.40	7.38	7.5	8.47	8.46	8.44	8.5	9.65	9.64	9.62	9.7	10.93	10.92	10.90	11.0	12.36	12.35	12.33	12.4	14.04	14.03	14.01	14.1
		Hi PR	259	260	262	266.7	300	301	302	306.9	342	343	345	349.1	387	388	390	394.6	436	437	439	443.6	488	490	491	495.9
		Lo PR	134	135	138	143.9	141	142	146	151.8	148	150	153	158.6	154	156	159	164.5	114	161	165	170.2	167	169	171	177.3
	1500	MBh	38.4	38.9	39.9	41.6	38.1	38.6	39.6	41.3	37.1	37.6	38.7	40.3	35.5	36.0	37.1	38.7	33.6	34.1	35.1	36.8	31.8	32.3	33.4	35.0
		S/T	1.00	1.00	0.95	0.8	1.00	1.00	0.96	0.8	1.00	1.00	0.99	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9	1.00	1.00	1.00	1.0
		ΔT	23.26	23.57	23.08	19.5	23.07	23.37	23.03	19.5	22.50	22.81	23.29	19.7	21.53	21.84	22.48	19.5	20.35	20.65	21.30	19.2	19.27	19.57	20.22	20.4
		kW	2.01	2.01	2.00	2.0	2.25	2.25	2.25	2.3	2.53	2.52	2.52	2.5	2.82	2.82	2.81	2.8	3.15	3.15	3.14	3.2	3.53	3.53	3.53	3.5
		Amps	7.51	7.50	7.48	7.6	8.57	8.56	8.54	8.6	9.75	9.74	9.72	9.8	11.03	11.02	11.00	11.1	12.46	12.45	12.43	12.5	14.14	14.13	14.11	14.2
		Hi PR	264	265	267	271.7	305	306	308	312.0	347	348	350	354.2	392	393	395	399.6	441	442	444	448.6	494	495	496	500.9
		Lo PR	139	143	144	149.3	147	148	152	157.2	154	155	159	164.1	159	161	167	169.9	165	167	170	175.6	172	174	177	182.7

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	630	MBh	25.0	25.4	26.1	-	24.8	25.1	25.9	-	24.1	24.5	25.2	-	22.9	23.3	24.1	-	21.5	21.9	22.7	-	20.3	20.6	21.4	-
		S/T	0.61	0.55	0.45	-	0.61	0.55	0.45	-	0.63	0.57	0.47	-	0.66	0.60	0.48	-	0.69	0.63	0.50	-	0.77	0.70	0.57	-
		ΔT	21.85	20.08	16.79	-	21.80	20.04	16.74	-	22.05	20.28	16.99	-	21.78	20.02	16.72	-	21.55	19.78	16.48	-	22.65	20.89	17.59	-
		kW	1.22	1.22	1.21	-	1.37	1.37	1.37	-	1.54	1.54	1.54	-	1.73	1.73	1.72	-	1.93	1.93	1.93	-	2.18	2.18	2.17	-
		Amps	4.52	4.52	4.51	-	5.19	5.18	5.17	-	5.93	5.93	5.92	-	6.74	6.73	6.72	-	7.64	7.63	7.62	-	8.69	8.69	8.68	-
		Hi PR	240	241	242	-	278	279	281	-	318	319	321	-	362	363	365	-	409	410	411	-	459	460	461	-
		Lo PR	129	131	134	-	137	139	142	-	137	142	149	-	137	143	152	-	138	144	152	-	136	141	149	-
	970	MBh	25.8	26.2	26.9	-	25.6	26.0	26.7	-	24.9	25.3	26.0	-	23.8	24.1	24.9	-	22.4	22.7	23.5	-	21.1	21.4	22.2	-
		S/T	0.75	0.66	0.51	-	0.75	0.67	0.52	-	0.78	0.69	0.54	-	0.81	0.72	0.55	-	0.85	0.75	0.58	-	0.95	0.85	0.66	-
		ΔT	18.03	16.27	12.97	-	17.98	16.22	12.92	-	18.23	16.47	13.17	-	17.97	16.20	12.90	-	17.73	15.96	12.67	-	18.84	17.07	13.77	-
		kW	1.25	1.25	1.24	-	1.40	1.40	1.40	-	1.57	1.57	1.57	-	1.76	1.76	1.75	-	1.96	1.96	1.96	-	2.21	2.20	2.20	-
		Amps	4.65	4.64	4.63	-	5.31	5.31	5.30	-	6.06	6.05	6.04	-	6.86	6.86	6.85	-	7.76	7.76	7.75	-	8.82	8.81	8.80	-
		Hi PR	246	247	249	-	285	286	287	-	325	326	328	-	368	369	371	-	415	416	418	-	465	466	468	-
		Lo PR	135	136	140	-	143	144	148	-	147	151	155	-	148	152	161	-	149	153	163	-	146	150	160	-
	1050	MBh	26.1	26.4	27.2	-	25.8	26.2	27.0	-	25.2	25.5	26.3	-	24.0	24.4	25.2	-	22.6	23.0	23.8	-	21.3	21.7	22.5	-
		S/T	0.77	0.68	0.52	-	0.78	0.69	0.53	-	0.81	0.72	0.55	-	0.83	0.74	0.56	-	0.87	0.77	0.59	-	0.99	0.88	0.68	-
		ΔT	17.43	15.66	12.36	-	17.38	15.61	12.31	-	17.63	15.86	12.56	-	17.36	15.59	12.29	-	17.12	15.36	12.06	-	18.23	16.46	13.16	-
		kW	1.25	1.25	1.25	-	1.40	1.40	1.40	-	1.58	1.57	1.57	-	1.76	1.76	1.76	-	1.97	1.97	1.96	-	2.21	2.21	2.21	-
		Amps	4.67	4.66	4.65	-	5.33	5.33	5.32	-	6.08	6.07	6.06	-	6.88	6.88	6.87	-	7.78	7.78	7.77	-	8.84	8.83	8.82	-
		Hi PR	247	248	250	-	286	287	289	-	326	327	329	-	370	371	372	-	417	418	419	-	467	468	469	-
		Lo PR	136	138	141	-	144	146	149	-	149	153	156	-	149	155	162	-	150	156	164	-	147	153	161	-
75	630	MBh	25.1	25.5	26.3	27.4	24.9	25.3	26.0	27.2	24.2	24.6	25.4	26.5	23.1	23.4	24.2	25.4	21.7	22.0	22.8	24.0	20.4	20.8	21.5	22.7
		S/T	0.71	0.65	0.55	0.4	0.71	0.66	0.55	0.4	0.74	0.68	0.57	0.5	0.77	0.71	0.59	0.5	0.81	0.74	0.62	0.5	0.90	0.83	0.69	0.6
		ΔT	25.73	23.97	20.67	17.3	25.69	23.92	20.62	17.2	25.93	24.17	20.87	17.5	25.67	23.90	20.60	17.2	25.43	23.67	20.37	17.0	26.54	24.77	21.47	18.1
		kW	1.22	1.22	1.21	1.2	1.37	1.37	1.37	1.4	1.54	1.54	1.54	1.5	1.73	1.73	1.72	1.7	1.93	1.93	1.93	1.9	2.18	2.18	2.17	2.2
		Amps	4.52	4.51	4.50	4.6	5.18	5.18	5.17	5.2	5.93	5.92	5.91	6.0	6.73	6.73	6.72	6.8	7.63	7.63	7.62	7.7	8.69	8.68	8.67	8.7
		Hi PR	240	241	242	246.7	278	279	281	285.3	319	320	321	325.6	362	363	365	369.0	409	410	412	415.9	459	460	462	465.8
		Lo PR	129	131	134	140.0	137	139	142	148.1	139	145	149	155.1	139	146	154	161.1	139	146	155	164.4	139	143	152	161.3
	970	MBh	26.0	26.3	27.1	28.2	25.7	26.1	26.9	28.0	25.1	25.4	26.2	27.4	23.9	24.3	25.0	26.2	22.5	22.9	23.6	24.8	21.2	21.6	22.3	23.5
		S/T	0.90	0.82	0.66	0.5	0.91	0.82	0.67	0.5	0.94	0.85	0.69	0.5	0.98	0.88	0.72	0.5	1.00	0.93	0.75	0.6	1.00	1.00	0.84	0.6
		ΔT	21.92	20.15	16.85	13.4	21.87	20.10	16.80	13.4	22.12	20.35	17.05	13.6	21.85	20.08	16.79	13.4	21.09	19.85	16.55	13.1	19.88	20.22	17.66	14.2
		kW	1.25	1.24	1.24	1.3	1.40	1.40	1.40	1.4	1.57	1.57	1.57	1.6	1.76	1.75	1.75	1.8	1.96	1.96	1.96	2.0	2.21	2.20	2.20	2.2
		Amps	4.64	4.64	4.63	4.7	5.31	5.30	5.29	5.3	6.05	6.05	6.04	6.1	6.86	6.85	6.84	6.9	7.76	7.75	7.74	7.8	8.81	8.81	8.80	8.8
		Hi PR	246	247	249	253.3	285	286	288	291.8	325	326	328	332.2	369	370	371	375.6	415	416	418	422.5	465	466	468	472.4
		Lo PR	135	136	140	145.4	139	144	148	153.4	139	151	155	160.5	139	156	161	166.5	153	157	165	172.4	157	162	162	173.2
	1050	MBh	26.2	26.6	27.3	28.5	26.0	26.3	27.1	28.3	25.3	25.7	26.4	27.6	24.2	24.5	25.3	26.5	22.8	23.1	23.9	25.1	21.5	21.8	22.6	23.8
		S/T	0.94	0.85	0.69	0.5	0.95	0.85	0.69	0.5	0.98	0.89	0.72	0.5	1.00	0.92	0.74	0.6	1.00	0.96	0.77	0.6	1.00	1.00	0.87	0.7
		ΔT	21.31	19.54	16.24	12.8	21.26	19.49	16.20	12.8	21.51	19.74	16.44	13.0	20.92	19.48	16.18	12.8	19.70	19.24	15.94	12.5	18.59	18.91	17.05	13.6
		kW	1.25	1.25	1.25	1.3	1.40	1.40	1.40	1.4	1.57	1.57	1.57	1.6	1.76	1.76	1.76	1.8	1.97	1.97	1.96	2.0	2.21	2.21	2.21	2.2
		Amps	4.66	4.66	4.64	4.7	5.33	5.32	5.31	5.4	6.07	6.07	6.06	6.1	6.88	6.87	6.86	6.9	7.78	7.77	7.76	7.8	8.83	8.83	8.82	8.9
		Hi PR	248	249	250	254.7	286	287	289	293.2	326	328	329	333.5	370	371	373	376.9	417	418	420	423.8	467	468	470	473.8
		Lo PR	136	138	141	146.8	139	146	149	154.8	140	153	156	161.9	154	158	162	167.9	157	158	168	173.8	160	162	165	174.6

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	630	MBh	25.3	25.6	26.4	27.6	25.0	25.4	26.2	27.3	24.4	24.7	25.5	26.7	23.2	23.6	24.3	25.5	21.8	22.2	22.9	24.1	20.5	20.9	21.6	22.8
		S/T	0.81	0.75	0.65	0.5	0.82	0.76	0.65	0.5	0.85	0.79	0.67	0.6	0.88	0.82	0.70	0.6	0.93	0.86	0.73	0.6	1.00	0.95	0.81	0.7
		ΔT	29.64	27.88	24.58	21.2	29.60	27.83	24.53	21.1	29.84	28.08	24.78	21.4	29.58	27.81	24.51	21.1	29.34	27.58	24.28	20.9	29.61	28.68	25.38	22.0
		kW	1.22	1.22	1.21	1.2	1.37	1.37	1.37	1.4	1.54	1.54	1.54	1.6	1.73	1.73	1.72	1.7	1.93	1.93	1.93	1.9	2.18	2.18	2.17	2.2
		Amps	4.52	4.52	4.50	4.6	5.19	5.18	5.17	5.2	5.93	5.93	5.92	6.0	6.74	6.73	6.72	6.8	7.64	7.63	7.62	7.7	8.69	8.69	8.68	8.7
		Hi PR	240	241	243	247.2	279	280	281	285.7	319	320	322	326.0	362	364	365	369.5	409	410	412	416.3	459	460	462	466.3
		Lo PR	127	132	135	140.6	128	140	143	148.7	128	147	150	155.7	128	149	156	161.7	127	149	158	167.6	144	146	155	164.5
	970	MBh	26.1	26.4	27.2	28.4	25.9	26.2	27.0	28.2	25.2	25.6	26.3	27.5	24.0	24.4	**25.2**	26.3	22.6	23.0	23.8	24.9	21.3	21.7	22.5	23.6
		S/T	1.00	0.97	0.81	0.7	1.00	0.98	0.82	0.7	1.00	1.00	0.85	0.7	1.00	1.00	**0.88**	0.7	1.00	1.00	0.92	0.7	1.00	1.00	1.00	0.8
		ΔT	24.45	24.06	20.76	17.3	24.23	24.01	20.71	17.3	23.61	23.95	20.96	17.5	22.53	22.87	**20.70**	17.3	21.21	21.55	20.46	17.0	20.01	20.35	21.06	18.1
		kW	1.25	1.25	1.24	1.3	1.40	1.40	1.40	1.4	1.57	1.57	1.57	1.6	1.76	1.76	**1.75**	1.8	1.96	1.96	1.96	2.0	2.21	2.20	2.20	2.2
		Amps	4.65	4.64	4.63	4.7	5.31	5.31	5.30	5.3	6.06	6.05	6.04	6.1	6.86	6.86	**6.85**	6.9	7.76	7.76	7.74	7.8	8.82	8.81	8.80	8.9
		Hi PR	247	248	250	253.8	285	286	288	292.3	326	327	328	332.6	369	370	**372**	376.1	416	417	419	422.9	466	467	469	472.9
		Lo PR	135	137	140	146.0	143	145	148	154.0	150	153	155	161.1	156	158	**161**	167.1	162	164	167	172.9	170	170	175	176.4
	1050	MBh	26.3	26.7	27.5	28.6	26.1	26.5	27.2	28.4	25.4	25.8	26.6	27.7	24.3	24.7	25.4	26.6	22.9	23.3	24.0	25.2	21.6	22.0	22.7	23.9
		S/T	1.00	1.00	0.85	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.91	0.7	1.00	1.00	0.95	0.8	1.00	1.00	1.00	0.8
		ΔT	22.81	23.12	20.15	16.7	22.61	22.92	20.11	16.7	22.03	22.34	20.35	16.9	21.04	21.35	20.09	16.7	19.82	20.13	19.85	16.4	18.71	19.02	19.68	17.5
		kW	1.25	1.25	1.25	1.3	1.40	1.40	1.40	1.4	1.58	1.57	1.57	1.6	1.76	1.76	1.76	1.8	1.97	1.97	1.96	2.0	2.21	2.21	2.21	2.2
		Amps	4.67	4.66	4.65	4.7	5.33	5.33	5.32	5.4	6.08	6.07	6.06	6.1	6.88	6.88	6.86	6.9	7.78	7.78	7.76	7.8	8.84	8.83	8.82	8.9
		Hi PR	248	249	251	255.1	287	288	289	293.6	327	328	330	334.0	370	371	373	377.4	417	418	420	424.2	467	468	470	474.2
		Lo PR	137	154	142	147.4	145	153	150	155.4	152	153	157	162.5	158	159	163	168.5	164	165	169	174.3	171	173	175	177.8
85	630	MBh	25.7	26.1	26.8	28.0	25.5	25.8	26.6	27.8	24.8	25.2	25.9	27.1	23.6	24.0	24.8	25.9	22.2	22.6	23.4	24.5	21.0	21.3	22.1	23.2
		S/T	0.89	0.83	0.72	0.6	0.90	0.84	0.73	0.6	0.93	0.87	0.76	0.6	0.97	0.90	0.78	0.7	1.00	0.95	0.82	0.7	1.00	1.00	0.91	0.8
		ΔT	33.11	31.35	28.05	24.6	33.06	31.30	28.00	24.6	33.31	31.55	28.25	24.8	33.05	31.28	27.98	24.6	32.09	31.04	27.75	24.3	30.24	30.76	28.85	25.4
		kW	1.22	1.22	1.22	1.2	1.37	1.37	1.37	1.4	1.55	1.54	1.54	1.6	1.73	1.73	1.73	1.7	1.94	1.94	1.93	1.9	2.18	2.18	2.18	2.2
		Amps	4.53	4.53	4.52	4.6	5.20	5.20	5.18	5.2	5.95	5.94	5.93	6.0	6.75	6.75	6.73	6.8	7.65	7.65	7.63	7.7	8.71	8.70	8.69	8.7
		Hi PR	241	242	244	248.3	280	281	283	286.9	320	321	323	327.2	364	365	366	370.6	410	411	413	417.5	460	461	463	467.4
		Lo PR	115	134	137	142.6	115	142	145	150.6	115	142	152	157.7	115	142	158	163.7	150	142	163	169.6	156	142	160	169.1
	970	MBh	26.5	26.9	27.6	28.8	26.3	26.7	27.4	28.6	25.6	26.0	26.7	27.9	24.5	24.8	25.6	26.8	23.1	23.4	24.2	25.4	21.8	22.1	22.9	24.1
		S/T	1.00	1.00	0.94	0.8	1.00	1.00	0.94	0.8	1.00	1.00	0.97	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9	1.00	1.00	1.00	1.0
		ΔT	24.85	25.19	24.23	20.8	24.64	24.98	24.18	20.8	24.01	24.35	24.43	21.0	22.93	23.27	23.99	20.7	21.62	21.95	22.67	20.5	20.41	20.75	21.47	21.6
		kW	1.25	1.25	1.25	1.3	1.40	1.40	1.40	1.4	1.57	1.57	1.57	1.6	1.76	1.76	1.76	1.8	1.97	1.96	1.96	2.0	2.21	2.21	2.21	2.2
		Amps	4.66	4.65	4.64	4.7	5.32	5.32	5.31	5.4	6.07	6.06	6.05	6.1	6.87	6.87	6.86	6.9	7.77	7.77	7.76	7.8	8.83	8.82	8.81	8.9
		Hi PR	248	249	251	254.9	286	287	289	293.4	327	328	330	333.8	370	371	373	377.2	417	418	420	424.1	467	468	470	474.0
		Lo PR	137	143	142	147.9	114	147	150	156.0	152	154	157	163.1	158	160	163	169.1	164	166	169	174.9	172	142	177	181.0
	1050	MBh	26.8	27.1	27.9	29.1	26.5	26.9	27.7	28.8	25.9	26.2	27.0	28.2	24.7	25.1	25.9	27.0	23.3	23.7	24.4	25.6	22.0	22.4	23.2	24.3
		S/T	1.00	1.00	0.98	0.8	1.00	1.00	0.98	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9	1.00	1.00	1.00	0.9	1.00	1.00	1.00	1.0
		ΔT	23.18	23.50	23.62	20.2	22.98	23.30	23.57	20.2	22.41	22.72	23.38	20.4	21.41	21.72	22.38	20.1	20.19	20.51	21.17	19.9	19.08	19.39	20.06	21.0
		kW	1.25	1.25	1.25	1.3	1.41	1.41	1.40	1.4	1.58	1.58	1.57	1.6	1.76	1.76	1.76	1.8	1.97	1.97	1.97	2.0	2.21	2.21	2.21	2.2
		Amps	4.68	4.67	4.66	4.7	5.34	5.34	5.33	5.4	6.09	6.08	6.07	6.1	6.89	6.89	6.88	6.9	7.79	7.79	7.78	7.8	8.85	8.84	8.83	8.9
		Hi PR	249	250	252	256.3	288	289	291	294.8	328	329	331	335.1	372	373	374	378.5	418	419	421	425.4	468	469	471	475.4
		Lo PR	139	143	144	149.3	147	142	152	157.4	115	155	167	164.5	160	161	167	170.5	166	167	171	176.3	173	175	178	182.4

IDB: Entering Indoor Dry Bulb Temperature Shaded area reflects ACCA (TVA) conditions **kW = Total system power**

High and low pressures are measured at the liquid and suction access fittings. **Amps: Unit amps (comp.+ evaporator + condenser fan motors)**

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	1200	MBh	46.4	47.0	48.4	-	45.9	46.6	48.0	-	44.7	45.4	46.8	-	42.6	43.3	44.7	-	40.0	40.7	42.1	-	37.7	38.4	39.8	-
		S/T	0.59	0.53	0.42	-	0.59	0.53	0.42	-	0.61	0.55	0.44	-	0.64	0.57	0.45	-	0.67	0.60	0.47	-	0.75	0.67	0.53	-
		ΔT	20.58	18.73	15.27	-	20.53	18.68	15.22	-	20.79	18.94	15.48	-	20.51	18.66	15.20	-	20.26	18.41	14.95	-	21.42	19.57	16.11	-
		kW	2.69	2.68	2.68	-	3.03	3.03	3.02	-	3.42	3.42	3.41	-	3.84	3.83	3.83	-	4.30	4.30	4.29	-	4.85	4.85	4.84	-
		Amps	9.99	9.98	9.96	-	11.50	11.48	11.46	-	13.17	13.16	13.14	-	14.99	14.98	14.95	-	17.02	17.01	16.98	-	19.40	19.38	19.36	-
		Hi PR	263	265	266	-	305	306	308	-	349	350	352	-	396	397	399	-	447	448	450	-	501	502	504	-
		Lo PR	127	129	132	-	135	136	140	-	140	143	146	-	141	146	152	-	141	147	157	-	139	143	153	-
	1460	MBh	47.2	47.9	49.3	-	46.8	47.4	48.8	-	45.6	46.2	47.6	-	43.5	44.1	45.5	-	40.9	41.5	42.9	-	38.5	39.2	40.6	-
		S/T	0.64	0.57	0.44	-	0.65	0.58	0.45	-	0.67	0.60	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.50	-	0.82	0.73	0.57	-
		ΔT	18.91	17.05	13.60	-	18.85	17.00	13.55	-	19.11	17.26	13.81	-	18.84	16.98	13.53	-	18.59	16.74	13.28	-	19.75	17.90	14.44	-
		kW	2.71	2.71	2.70	-	3.06	3.06	3.05	-	3.44	3.44	3.44	-	3.86	3.86	3.85	-	4.33	4.33	4.32	-	4.88	4.87	4.87	-
		Amps	10.11	10.10	10.07	-	11.61	11.60	11.57	-	13.29	13.28	13.25	-	15.11	15.09	15.07	-	17.13	17.12	17.10	-	19.51	19.50	19.48	-
		Hi PR	267	268	270	-	308	310	311	-	352	353	355	-	399	400	402	-	450	451	453	-	504	505	507	-
		Lo PR	130	131	134	-	137	139	142	-	144	146	149	-	146	150	155	-	147	151	160	-	143	149	157	-
	2000	MBh	49.8	50.5	51.9	-	49.4	50.1	51.5	-	48.2	48.9	50.3	-	46.1	46.8	48.2	-	43.5	44.2	45.6	-	41.2	41.8	43.2	-
		S/T	0.72	0.63	0.47	-	0.73	0.64	0.47	-	0.76	0.66	0.49	-	0.78	0.68	0.50	-	0.81	0.71	0.52	-	0.92	0.81	0.61	-
		ΔT	16.38	14.53	11.07	-	16.33	14.48	11.02	-	16.59	14.74	11.28	-	16.31	14.46	11.01	-	16.07	14.22	10.76	-	17.23	15.37	11.92	-
		kW	2.75	2.75	2.74	-	3.10	3.10	3.09	-	3.48	3.48	3.48	-	3.90	3.90	3.89	-	4.37	4.37	4.36	-	4.92	4.91	4.91	-
		Amps	10.28	10.27	10.25	-	11.79	11.77	11.75	-	13.46	13.45	13.43	-	15.28	15.27	15.24	-	17.31	17.30	17.27	-	19.69	19.68	19.65	-
		Hi PR	273	275	276	-	315	316	318	-	359	360	362	-	406	407	409	-	457	458	460	-	511	512	514	-
		Lo PR	137	138	142	-	144	146	149	-	150	153	156	-	149	157	162	-	150	158	168	-	150	154	164	-
75	1200	MBh	46.6	47.3	48.7	50.8	46.2	46.8	48.2	50.4	45.0	45.6	47.0	49.1	42.9	43.5	44.9	47.0	40.3	40.9	42.3	44.5	37.9	38.6	40.0	42.1
		S/T	0.70	0.64	0.52	0.4	0.70	0.64	0.53	0.4	0.73	0.67	0.55	0.4	0.76	0.69	0.57	0.4	0.80	0.72	0.59	0.5	0.89	0.81	0.67	0.5
		ΔT	24.65	22.80	19.34	15.8	24.60	22.75	19.29	15.7	24.86	23.01	19.55	16.0	24.58	22.73	19.27	15.7	24.33	22.48	19.02	15.4	25.49	23.64	20.18	16.6
		kW	2.68	2.68	2.68	2.7	3.03	3.03	3.02	3.0	3.42	3.41	3.41	3.4	3.83	3.83	3.82	3.9	4.30	4.30	4.29	4.3	4.85	4.84	4.84	4.9
		Amps	9.98	9.97	9.95	10.1	11.49	11.47	11.45	11.6	13.16	13.15	13.13	13.2	14.98	14.97	14.94	15.1	17.01	17.00	16.97	17.1	19.39	19.38	19.35	19.5
		Hi PR	264	265	267	271.3	305	307	308	313.1	349	350	352	356.8	396	397	399	403.9	447	448	450	454.7	501	502	504	508.8
		Lo PR	127	129	132	137.3	135	136	140	145.1	139	143	146	151.9	140	149	152	157.6	139	149	158	163.3	139	146	156	165.2
	1460	MBh	47.4	48.1	49.5	51.6	47.0	47.7	49.1	51.2	45.8	46.5	47.9	50.0	43.7	**44.4**	45.8	47.9	41.1	41.8	43.2	45.3	38.8	39.4	40.8	43.0
		S/T	0.78	0.71	0.57	0.4	0.78	0.71	0.58	0.4	0.81	0.74	0.60	0.5	0.84	**0.76**	0.62	0.5	0.88	0.80	0.65	0.5	0.99	0.89	0.73	0.6
		ΔT	22.98	21.12	17.67	14.1	22.93	21.07	17.62	14.0	23.19	21.33	17.88	14.3	22.91	**21.06**	17.60	14.0	22.66	20.81	17.35	13.8	23.82	21.97	18.51	14.9
		kW	2.71	2.71	2.70	2.7	3.06	3.05	3.05	3.1	3.44	3.44	3.43	3.5	3.86	**3.86**	3.85	3.9	4.33	4.32	4.32	4.3	4.87	4.87	4.87	4.9
		Amps	10.10	10.09	10.06	10.2	11.60	11.59	11.57	11.7	13.28	13.27	13.24	13.4	15.10	**15.08**	15.06	15.2	17.12	17.11	17.09	17.2	19.50	19.49	19.47	19.6
		Hi PR	267	268	270	274.6	309	310	312	316.3	352	354	355	360.1	400	**401**	403	407.1	450	451	453	457.9	504	506	507	512.1
		Lo PR	130	131	135	139.9	137	139	142	147.7	139	146	149	154.5	140	**152**	155	160.3	139	153	160	165.9	139	150	160	170.4
	2000	MBh	50.1	50.7	52.1	54.3	49.7	50.3	51.7	53.9	48.4	49.1	50.5	52.6	46.3	47.0	48.4	50.5	43.8	44.4	45.8	48.0	41.4	42.1	43.5	45.6
		S/T	0.90	0.81	0.64	0.5	0.90	0.81	0.64	0.5	0.94	0.84	0.67	0.5	0.97	0.87	0.69	0.5	1.00	0.91	0.71	0.5	1.00	1.00	0.81	0.6
		ΔT	20.46	18.60	15.15	11.6	20.41	18.55	15.10	11.5	20.67	18.81	15.36	11.8	20.39	18.53	15.08	11.5	19.89	18.29	14.83	11.2	18.83	19.13	15.99	12.4
		kW	2.75	2.75	2.74	2.8	3.10	3.09	3.09	3.1	3.48	3.48	3.47	3.5	3.90	3.90	3.89	3.9	4.37	4.36	4.36	4.4	4.91	4.91	4.91	4.9
		Amps	10.27	10.26	10.24	10.4	11.78	11.77	11.74	11.9	13.45	13.44	13.42	13.5	15.27	15.26	15.23	15.3	17.30	17.29	17.26	17.4	19.68	19.67	19.64	19.8
		Hi PR	274	275	277	281.3	315	317	318	323.0	359	360	362	366.8	406	407	409	413.8	457	458	460	464.6	511	512	514	518.8
		Lo PR	137	138	142	147.0	139	146	149	154.8	140	153	156	161.6	139	159	162	167.3	157	160	168	173.0	159	163	168	178.8

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	1200	MBh	46.8	47.5	48.9	51.0	46.4	47.1	48.5	50.6	45.2	45.9	47.3	49.4	43.1	43.8	45.2	47.3	40.5	41.2	42.6	44.7	38.2	38.8	40.2	42.4
		S/T	0.81	0.75	0.63	0.5	0.82	0.75	0.64	0.5	0.85	0.78	0.66	0.5	0.88	0.81	0.68	0.6	0.93	0.85	0.72	0.6	1.00	0.94	0.80	0.6
		ΔT	28.75	26.90	23.44	19.9	28.70	26.85	23.39	19.8	28.96	27.11	23.65	20.1	28.68	26.83	23.37	19.8	28.43	26.58	23.12	19.5	28.92	27.74	24.28	20.7
		kW	2.69	2.68	2.68	2.7	3.03	3.03	3.02	3.0	3.42	3.41	3.41	3.4	3.83	3.83	3.83	3.9	4.30	4.30	4.29	4.3	4.85	4.85	4.84	4.9
		Amps	9.99	9.98	9.95	10.1	11.49	11.48	11.46	11.6	13.17	13.16	13.13	13.2	14.99	14.98	14.95	15.1	17.02	17.00	16.98	17.1	19.39	19.38	19.36	19.5
		Hi PR	264	265	267	271.8	306	307	309	313.6	350	351	353	357.3	397	398	400	404.4	448	449	451	455.1	502	503	505	509.3
		Lo PR	128	129	132	137.9	128	137	140	145.6	128	144	147	152.4	127	150	153	158.2	128	151	158	163.9	146	148	158	168.3
	1460	MBh	47.7	48.3	49.7	51.9	47.3	47.9	49.3	51.5	46.0	46.7	48.1	50.2	43.9	44.6	**46.0**	48.1	41.4	42.0	43.4	45.6	39.0	39.7	41.1	43.2
		S/T	0.91	0.84	0.70	0.6	0.92	0.84	0.71	0.6	0.95	0.87	0.73	0.6	0.99	0.91	**0.76**	0.6	1.00	0.95	0.79	0.6	1.00	1.00	0.88	0.7
		ΔT	27.08	25.22	21.77	18.2	27.03	25.17	21.72	18.1	27.29	25.43	21.98	18.4	27.01	25.15	**21.70**	18.1	25.76	24.91	21.45	17.9	24.30	24.71	22.61	19.0
		kW	2.71	2.71	2.70	2.7	3.06	3.06	3.05	3.1	3.44	3.44	3.44	3.5	3.86	3.86	**3.85**	3.9	4.33	4.33	4.32	4.3	4.88	4.87	4.87	4.9
		Amps	10.11	10.10	10.07	10.2	11.61	11.60	11.57	11.7	13.29	13.28	13.25	13.4	15.10	15.09	**15.07**	15.2	17.13	17.12	17.09	17.2	19.51	19.50	19.47	19.6
		Hi PR	267	269	270	275.1	309	310	312	316.8	353	354	356	360.6	400	401	**403**	407.6	451	452	454	458.4	505	506	508	512.6
		Lo PR	128	132	135	140.5	128	140	143	148.3	128	146	150	155.1	127	152	**155**	160.8	154	153	161	166.5	158	157	163	173.6
	2000	MBh	50.3	51.0	52.4	54.5	49.9	50.6	52.0	54.1	48.7	49.3	50.7	52.9	46.6	47.2	48.6	50.8	44.0	44.7	46.1	48.2	41.7	42.3	43.7	45.9
		S/T	1.00	0.98	0.81	0.6	1.00	0.99	0.81	0.6	1.00	1.00	0.84	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.90	0.7	1.00	1.00	1.00	0.8
		ΔT	22.87	22.70	19.25	15.7	22.68	22.65	19.20	15.6	22.13	22.43	19.46	15.9	21.17	21.47	19.18	15.6	20.00	20.30	18.93	15.3	18.94	19.24	19.87	16.5
		kW	2.75	2.75	2.74	2.8	3.10	3.10	3.09	3.1	3.48	3.48	3.48	3.5	3.90	3.90	3.89	3.9	4.37	4.37	4.36	4.4	4.92	4.91	4.91	4.9
		Amps	10.28	10.27	10.24	10.4	11.78	11.77	11.75	11.9	13.46	13.45	13.42	13.5	15.28	15.27	15.24	15.4	17.31	17.29	17.27	17.4	19.69	19.67	19.65	19.8
		Hi PR	274	275	277	281.8	316	317	319	323.5	360	361	363	367.3	407	408	410	414.3	457	459	460	465.1	512	513	515	519.3
		Lo PR	137	139	142	147.6	145	147	150	155.3	152	153	157	162.2	158	159	162	167.9	163	165	168	173.6	170	172	175	180.6
85	1200	MBh	47.6	48.3	49.7	51.8	47.2	47.9	49.3	51.4	46.0	46.6	48.0	50.2	43.9	44.5	45.9	48.1	41.3	42.0	43.4	45.5	39.0	39.6	41.0	43.2
		S/T	0.90	0.83	0.72	0.6	0.90	0.84	0.72	0.6	0.94	0.87	0.75	0.6	0.97	0.90	0.78	0.6	1.00	0.95	0.81	0.7	1.00	1.00	0.90	0.7
		ΔT	32.38	30.53	27.08	23.5	32.33	30.48	27.02	23.4	32.59	30.74	27.28	23.7	32.32	30.46	27.01	23.4	31.30	30.22	26.76	23.2	29.52	30.02	27.92	24.3
		kW	2.69	2.69	2.68	2.7	3.04	3.04	3.03	3.1	3.42	3.42	3.42	3.4	3.84	3.84	3.83	3.9	4.31	4.31	4.30	4.3	4.86	4.85	4.85	4.9
		Amps	10.02	10.01	9.98	10.1	11.52	11.51	11.49	11.6	13.20	13.19	13.16	13.3	15.02	15.00	14.98	15.1	17.04	17.03	17.01	17.1	19.42	19.41	19.39	19.5
		Hi PR	265	267	268	273.1	307	308	310	314.8	351	352	354	358.5	398	399	401	405.6	449	450	452	456.4	503	504	506	510.6
		Lo PR	115	131	134	139.8	115	139	142	147.6	114	142	149	154.4	115	142	155	160.1	153	141	160	165.8	158	156	162	172.8
	1460	MBh	48.5	49.1	50.5	52.7	48.1	48.7	50.1	52.2	46.8	47.5	48.9	51.0	44.7	45.4	46.8	48.9	42.2	42.8	44.2	46.4	39.8	40.5	41.9	44.0
		S/T	1.00	0.94	0.81	0.7	1.00	0.95	0.81	0.7	1.00	0.98	0.84	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.91	0.7	1.00	1.00	1.00	0.8
		ΔT	30.18	28.86	25.40	21.8	29.92	28.81	25.35	21.8	29.16	29.07	25.61	22.0	27.85	28.26	25.33	21.8	26.25	26.66	25.09	21.5	24.79	25.20	26.07	22.7
		kW	2.72	2.72	2.71	2.7	3.07	3.06	3.06	3.1	3.45	3.45	3.44	3.5	3.87	3.87	3.86	3.9	4.33	4.33	4.33	4.4	4.88	4.88	4.87	4.9
		Amps	10.14	10.12	10.10	10.2	11.64	11.63	11.60	11.7	13.32	13.31	13.28	13.4	15.13	15.12	15.09	15.2	17.16	17.15	17.12	17.2	19.54	19.53	19.50	19.6
		Hi PR	269	270	272	276.3	310	312	313	318.1	354	355	357	361.8	401	402	404	408.9	452	453	455	459.6	506	507	509	513.8
		Lo PR	132	134	137	142.4	140	142	145	150.2	147	142	152	157.0	152	154	157	162.8	158	160	163	168.4	165	167	167	175.5
	2000	MBh	51.1	51.8	53.2	55.3	50.7	51.4	52.7	54.9	49.5	50.1	51.5	53.7	47.4	48.0	49.4	51.6	44.8	45.5	46.9	49.0	42.5	43.1	44.5	46.6
		S/T	1.00	1.00	0.95	0.8	1.00	1.00	0.95	0.8	1.00	1.00	0.99	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9	1.00	1.00	1.00	0.9
		ΔT	23.23	23.53	22.88	19.3	23.04	23.34	22.83	19.2	22.49	22.79	23.09	19.5	21.53	21.83	22.47	19.2	20.36	20.66	21.30	19.0	19.30	19.60	20.23	20.1
		kW	2.76	2.76	2.75	2.8	3.11	3.10	3.10	3.1	3.49	3.49	3.48	3.5	3.91	3.91	3.90	3.9	4.37	4.37	4.37	4.4	4.92	4.92	4.91	4.9
		Amps	10.31	10.30	10.27	10.4	11.81	11.80	11.78	11.9	13.49	13.48	13.45	13.6	15.31	15.29	15.27	15.4	17.33	17.32	17.30	17.4	19.71	19.70	19.68	19.8
		Hi PR	275	277	278	283.0	317	318	320	324.8	361	362	364	368.5	408	409	411	415.6	459	460	462	466.3	513	514	516	520.5
		Lo PR	139	143	144	149.5	147	149	152	157.3	154	155	159	164.1	160	161	167	169.8	165	167	170	175.5	172	174	177	182.5

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	840	MBh	33.2	33.7	34.7	-	32.9	33.4	34.4	-	32.1	32.5	33.5	-	30.5	31.0	32.0	-	28.7	29.2	30.2	-	27.0	27.5	28.5	-
		S/T	0.56	0.50	0.40	-	0.56	0.51	0.40	-	0.59	0.53	0.42	-	0.61	0.55	0.43	-	0.64	0.57	0.45	-	0.72	0.65	0.51	-
		ΔT	20.18	18.39	15.06	-	20.13	18.34	15.01	-	20.38	18.60	15.26	-	20.11	18.33	14.99	-	19.87	18.09	14.75	-	20.99	19.21	15.87	-
		kW	1.69	1.68	1.68	-	1.90	1.90	1.90	-	2.15	2.14	2.14	-	2.41	2.41	2.40	-	2.70	2.70	2.70	-	3.05	3.05	3.04	-
		Amps	6.27	6.26	6.25	-	7.22	7.21	7.19	-	8.27	8.26	8.25	-	9.41	9.41	9.39	-	10.69	10.68	10.67	-	12.19	12.18	12.16	-
		Hi PR	251	252	254	-	291	292	294	-	333	334	336	-	378	379	381	-	427	428	429	-	478	479	481	-
		Lo PR	130	132	135	-	138	140	143	-	141	147	150	-	142	147	156	-	143	148	157	-	139	145	153	-
	1060	MBh	33.9	34.4	35.4	-	33.6	34.1	35.1	-	32.8	33.2	34.2	-	31.2	31.7	32.7	-	29.4	29.9	30.9	-	27.7	28.2	29.2	-
		S/T	0.63	0.56	0.43	-	0.63	0.56	0.43	-	0.66	0.58	0.45	-	0.68	0.60	0.47	-	0.71	0.63	0.48	-	0.80	0.71	0.56	-
		ΔT	18.24	16.46	13.12	-	18.19	16.41	13.07	-	18.45	16.66	13.32	-	18.18	16.39	13.05	-	17.94	16.15	12.81	-	19.06	17.27	13.93	-
		kW	1.71	1.70	1.70	-	1.92	1.92	1.92	-	2.17	2.17	2.16	-	2.43	2.43	2.42	-	2.72	2.72	2.72	-	3.07	3.07	3.06	-
		Amps	6.36	6.35	6.34	-	7.30	7.30	7.28	-	8.36	8.35	8.34	-	9.50	9.49	9.48	-	10.78	10.77	10.75	-	12.27	12.27	12.25	-
		Hi PR	255	256	258	-	295	296	298	-	337	338	340	-	382	383	385	-	430	431	433	-	482	483	485	-
		Lo PR	133	135	138	-	141	143	146	-	147	150	153	-	148	152	159	-	148	153	162	-	145	149	159	-
	1400	MBh	35.5	36.0	37.0	-	35.2	35.7	36.7	-	34.3	34.8	35.8	-	32.8	33.3	34.3	-	31.0	31.5	32.5	-	29.3	29.8	30.8	-
		S/T	0.70	0.61	0.46	-	0.70	0.62	0.46	-	0.73	0.64	0.48	-	0.75	0.66	0.49	-	0.79	0.69	0.51	-	0.89	0.78	0.59	-
		ΔT	16.10	14.31	10.98	-	16.05	14.26	10.93	-	16.30	14.52	11.18	-	16.03	14.25	10.91	-	15.79	14.01	10.67	-	16.91	15.13	11.79	-
		kW	1.73	1.73	1.72	-	1.95	1.94	1.94	-	2.19	2.19	2.18	-	2.45	2.45	2.45	-	2.75	2.74	2.74	-	3.09	3.09	3.08	-
		Amps	6.46	6.45	6.43	-	7.40	7.39	7.38	-	8.46	8.45	8.43	-	9.60	9.59	9.57	-	10.87	10.87	10.85	-	12.37	12.36	12.35	-
		Hi PR	261	262	263	-	300	302	303	-	342	343	345	-	387	388	390	-	436	437	439	-	488	489	490	-
		Lo PR	139	141	144	-	147	149	152	-	149	156	159	-	150	158	165	-	149	159	168	-	150	155	165	-
75	840	MBh	33.4	33.9	34.9	36.4	33.1	33.6	34.6	36.1	32.2	32.7	33.7	35.3	30.7	31.2	32.2	33.7	28.9	29.4	30.4	31.9	27.2	27.7	28.7	30.2
		S/T	0.67	0.61	0.50	0.4	0.67	0.61	0.51	0.4	0.70	0.64	0.53	0.4	0.72	0.66	0.54	0.4	0.76	0.69	0.57	0.4	0.85	0.77	0.64	0.5
		ΔT	24.11	22.32	18.99	15.5	24.06	22.27	18.94	15.5	24.31	22.52	19.19	15.7	24.04	22.26	18.92	15.5	23.80	22.02	18.68	15.2	24.92	23.14	19.80	16.3
		kW	1.68	1.68	1.68	1.7	1.90	1.90	1.90	1.9	2.15	2.14	2.14	2.2	2.41	2.41	2.40	2.4	2.70	2.70	2.70	2.7	3.05	3.04	3.04	3.1
		Amps	6.26	6.26	6.24	6.3	7.21	7.20	7.19	7.3	8.27	8.26	8.24	8.3	9.41	9.40	9.38	9.5	10.68	10.68	10.66	10.7	12.18	12.17	12.16	12.2
		Hi PR	252	253	254	258.8	291	293	294	298.7	333	334	336	340.5	378	379	381	385.6	427	428	430	434.1	479	480	481	485.9
		Lo PR	130	132	135	140.7	138	140	143	148.7	139	147	150	155.7	139	150	156	161.6	139	151	159	167.4	139	148	156	166.9
	1060	MBh	34.1	34.6	35.6	37.1	33.8	34.3	35.3	36.8	32.9	33.4	34.4	35.9	31.4	31.9	32.9	34.4	29.6	30.0	31.1	32.6	27.9	28.4	29.4	30.9
		S/T	0.76	0.69	0.56	0.4	0.76	0.69	0.56	0.4	0.79	0.72	0.58	0.4	0.82	0.74	0.60	0.5	0.86	0.78	0.63	0.5	0.96	0.87	0.71	0.5
		ΔT	22.17	20.39	17.05	13.6	22.12	20.34	17.00	13.5	22.37	20.59	17.25	13.8	22.11	20.32	16.98	13.5	21.87	20.08	16.74	13.3	22.99	21.20	17.86	14.4
		kW	1.71	1.70	1.70	1.7	1.92	1.92	1.92	1.9	2.17	2.16	2.16	2.2	2.43	2.43	2.42	2.4	2.72	2.72	2.72	2.7	3.07	3.06	3.06	3.1
		Amps	6.35	6.35	6.33	6.4	7.30	7.29	7.27	7.3	8.35	8.35	8.33	8.4	9.50	9.49	9.47	9.5	10.77	10.76	10.75	10.8	12.27	12.26	12.24	12.3
		Hi PR	255	256	258	262.5	295	296	298	302.4	337	338	340	344.2	382	383	385	389.2	430	432	433	437.8	482	483	485	489.6
		Lo PR	133	135	138	143.9	139	143	146	151.9	139	150	153	158.9	139	155	159	164.8	139	156	165	170.6	139	153	162	172.7
	1400	MBh	35.7	36.2	37.2	38.7	35.4	35.9	36.9	38.4	34.5	35.0	36.0	37.5	33.0	33.5	34.5	36.0	31.2	31.6	32.6	34.2	29.5	29.9	30.9	32.5
		S/T	0.86	0.78	0.62	0.5	0.87	0.78	0.62	0.5	0.90	0.81	0.65	0.5	0.93	0.84	0.66	0.5	0.97	0.87	0.69	0.5	1.00	0.98	0.78	0.6
		ΔT	20.03	18.24	14.91	11.4	19.98	18.19	14.86	11.4	20.23	18.44	15.11	11.7	19.96	18.18	14.84	11.4	19.72	17.94	14.60	11.1	19.14	19.06	15.72	12.3
		kW	1.73	1.73	1.72	1.7	1.94	1.94	1.94	2.0	2.19	2.19	2.18	2.2	2.45	2.45	2.44	2.5	2.74	2.74	2.74	2.8	3.09	3.09	3.08	3.1
		Amps	6.45	6.44	6.43	6.5	7.39	7.39	7.37	7.4	8.45	8.44	8.43	8.5	9.59	9.58	9.57	9.6	10.87	10.86	10.84	10.9	12.36	12.36	12.34	12.4
		Hi PR	261	262	264	268.0	301	302	304	307.9	342	344	345	349.7	387	389	390	394.7	436	437	439	443.3	488	489	491	495.0
		Lo PR	139	141	144	150.0	140	149	152	158.0	139	156	159	165.0	140	161	165	170.9	139	161	171	176.7	159	158	168	178.8

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	840	MBh	33.6	34.1	35.1	36.6	33.3	33.8	34.8	36.3	32.4	32.9	33.9	35.4	30.9	31.4	32.4	33.9	29.1	29.5	30.5	32.1	27.4	27.8	28.8	30.4
		S/T	0.77	0.71	0.60	0.5	0.78	0.72	0.61	0.5	0.81	0.74	0.63	0.5	0.84	0.77	0.65	0.5	0.88	0.81	0.69	0.6	0.98	0.90	0.76	0.6
		ΔT	28.07	26.28	22.94	19.5	28.02	26.23	22.89	19.4	28.27	26.48	23.14	19.7	28.00	26.21	22.87	19.4	27.76	25.97	22.64	19.2	28.88	27.09	23.75	20.3
		kW	1.69	1.68	1.68	1.7	1.90	1.90	1.90	1.9	2.15	2.14	2.14	2.2	2.41	2.41	2.40	2.4	2.70	2.70	2.70	2.7	3.05	3.04	3.04	3.1
		Amps	6.27	6.26	6.25	6.3	7.22	7.21	7.19	7.3	8.27	8.26	8.25	8.3	9.41	9.40	9.39	9.5	10.69	10.68	10.66	10.7	12.18	12.18	12.16	12.2
		Hi PR	252	253	255	259.3	292	293	295	299.2	334	335	337	341.0	379	380	382	386.0	427	428	430	434.5	479	480	482	486.3
		Lo PR	128	132	136	141.3	127	140	144	149.3	128	147	151	156.3	127	152	157	162.2	128	153	162	168.0	127	151	159	170.1
	1060	MBh	34.3	34.8	35.8	37.3	34.0	34.5	35.5	37.0	33.1	33.6	34.6	36.1	31.6	32.1	**33.1**	34.6	29.7	30.2	31.2	32.8	28.1	28.5	29.5	31.1
		S/T	0.89	0.82	0.68	0.5	0.89	0.82	0.69	0.6	0.93	0.85	0.71	0.6	0.96	0.88	**0.74**	0.6	1.00	0.93	0.77	0.6	1.00	1.00	0.86	0.7
		ΔT	26.13	24.34	21.00	17.5	26.08	24.29	20.96	17.5	26.33	24.54	21.21	17.8	26.06	24.27	**20.94**	17.5	25.51	24.04	20.70	17.2	24.06	24.47	21.82	18.4
		kW	1.71	1.70	1.70	1.7	1.92	1.92	1.92	1.9	2.17	2.16	2.16	2.2	2.43	2.43	**2.42**	2.4	2.72	2.72	2.72	2.7	3.07	3.07	3.06	3.1
		Amps	6.36	6.35	6.33	6.4	7.30	7.30	7.28	7.4	8.36	8.35	8.33	8.4	9.50	9.49	**9.48**	9.5	10.78	10.77	10.75	10.8	12.27	12.27	12.25	12.3
		Hi PR	256	257	259	263.0	296	297	298	302.9	337	339	340	344.7	382	384	**385**	389.7	431	432	434	438.2	483	484	486	490.0
		Lo PR	127	136	139	144.4	128	143	147	152.4	128	150	154	159.4	127	153	**160**	165.4	155	152	166	171.2	159	158	165	175.8
	1400	MBh	35.9	36.3	37.3	38.9	35.6	36.0	37.0	38.6	34.7	35.2	36.2	37.7	33.2	33.7	34.7	36.2	31.3	31.8	32.8	34.3	29.6	30.1	31.1	32.7
		S/T	1.00	0.94	0.78	0.6	1.00	0.95	0.78	0.6	1.00	0.98	0.81	0.6	1.00	1.00	0.84	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.97	0.8
		ΔT	23.29	22.20	18.86	15.4	23.10	22.15	18.81	15.4	22.52	22.40	19.06	15.6	21.54	21.85	18.79	15.3	20.34	20.65	18.56	15.1	19.25	19.56	19.67	16.2
		kW	1.73	1.73	1.72	1.7	1.95	1.94	1.94	2.0	2.19	2.19	2.18	2.2	2.45	2.45	2.45	2.5	2.74	2.74	2.74	2.8	3.09	3.09	3.08	3.1
		Amps	6.45	6.45	6.43	6.5	7.40	7.39	7.38	7.4	8.45	8.45	8.43	8.5	9.60	9.59	9.57	9.6	10.87	10.87	10.85	10.9	12.37	12.36	12.35	12.4
		Hi PR	261	262	264	268.5	301	302	304	308.4	343	344	346	350.2	388	389	391	395.2	436	438	439	443.7	488	489	491	495.5
		Lo PR	140	142	145	150.6	148	150	153	158.5	155	151	160	165.5	161	163	166	171.5	167	168	172	177.3	173	172	171	181.9
85	840	MBh	34.2	34.6	35.6	37.2	33.9	34.3	35.3	36.9	33.0	33.5	34.5	36.0	31.5	31.9	32.9	34.5	29.6	30.1	31.1	32.6	27.9	28.4	29.4	30.9
		S/T	0.85	0.79	0.69	0.6	0.86	0.80	0.69	0.6	0.89	0.83	0.71	0.6	0.93	0.86	0.74	0.6	0.98	0.91	0.78	0.6	1.00	1.00	0.86	0.7
		ΔT	31.57	29.79	26.45	23.0	31.52	29.74	26.40	22.9	31.78	29.99	26.65	23.2	31.51	29.72	26.38	22.9	31.27	29.48	26.14	22.7	30.23	30.60	27.26	23.8
		kW	1.69	1.69	1.68	1.7	1.91	1.91	1.90	1.9	2.15	2.15	2.14	2.2	2.41	2.41	2.41	2.4	2.71	2.70	2.70	2.7	3.05	3.05	3.05	3.1
		Amps	6.29	6.28	6.26	6.3	7.23	7.23	7.21	7.3	8.29	8.28	8.26	8.3	9.43	9.42	9.41	9.5	10.71	10.70	10.68	10.8	12.20	12.20	12.18	12.3
		Hi PR	253	254	256	260.5	293	294	296	300.4	335	336	338	342.2	380	381	383	387.2	428	430	431	435.7	480	481	483	487.5
		Lo PR	115	134	138	143.3	115	142	146	151.3	115	142	153	158.3	115	142	159	164.2	115	142	164	170.0	156	142	164	173.3
	1060	MBh	34.9	35.3	36.3	37.9	34.6	35.0	36.0	37.6	33.7	34.1	35.2	36.7	32.2	32.6	33.6	35.2	30.3	30.8	31.8	33.3	28.6	29.1	30.1	31.6
		S/T	0.99	0.92	0.79	0.6	1.00	0.93	0.79	0.7	1.00	0.96	0.82	0.7	1.00	0.99	0.85	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.98	0.8
		ΔT	29.64	27.85	24.51	21.1	29.59	27.80	24.46	21.0	28.88	28.05	24.72	21.3	27.58	27.78	24.45	21.0	26.00	26.40	24.21	20.8	24.55	24.96	25.33	21.9
		kW	1.71	1.71	1.71	1.7	1.93	1.93	1.92	1.9	2.17	2.17	2.17	2.2	2.43	2.43	2.43	2.4	2.73	2.72	2.72	2.7	3.07	3.07	3.07	3.1
		Amps	6.38	6.37	6.35	6.4	7.32	7.31	7.30	7.4	8.38	8.37	8.35	8.4	9.52	9.51	9.49	9.6	10.79	10.79	10.77	10.8	12.29	12.28	12.27	12.3
		Hi PR	257	258	260	264.2	297	298	300	304.1	339	340	341	345.9	384	385	386	390.9	432	433	435	439.4	484	485	487	491.2
		Lo PR	115	137	141	146.4	115	142	149	154.4	151	142	156	161.4	157	141	162	167.3	163	164	166	173.1	170	171	166	180.4
	1400	MBh	36.4	36.9	37.9	39.5	36.1	36.6	37.6	39.1	35.3	35.7	36.7	38.3	33.7	34.2	35.2	36.8	31.9	32.4	33.4	34.9	30.2	30.7	31.7	33.2
		S/T	1.00	1.00	0.91	0.7	1.00	1.00	0.91	0.7	1.00	1.00	0.95	0.8	1.00	1.00	0.98	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9
		ΔT	23.66	23.97	22.37	18.9	23.46	23.77	22.32	18.9	22.89	23.20	22.57	19.1	21.91	22.22	22.30	18.8	20.71	21.02	21.67	18.6	19.62	19.93	20.58	19.7
		kW	1.73	1.73	1.73	1.7	1.95	1.95	1.94	2.0	2.19	2.19	2.19	2.2	2.46	2.45	2.45	2.5	2.75	2.75	2.74	2.8	3.09	3.09	3.09	3.1
		Amps	6.47	6.47	6.45	6.5	7.42	7.41	7.39	7.5	8.47	8.47	8.45	8.5	9.61	9.61	9.59	9.7	10.89	10.88	10.87	10.9	12.39	12.38	12.36	12.4
		Hi PR	262	263	265	269.7	302	303	305	309.6	344	345	347	351.4	389	390	392	396.4	438	439	441	444.9	489	491	492	496.7
		Lo PR	142	144	147	152.5	150	152	155	160.5	157	159	162	167.5	163	164	165	173.4	115	170	174	179.2	115	178	181	186.5

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	1500	MBh	59.3	60.2	62.0	-	58.8	59.6	61.4	-	57.2	58.1	59.9	-	54.5	55.4	57.2	-	51.2	52.1	53.9	-	48.2	49.1	50.9	-
		S/T	0.56	0.50	0.40	-	0.56	0.51	0.40	-	0.59	0.53	0.42	-	0.61	0.54	0.43	-	0.64	0.57	0.45	-	0.72	0.64	0.51	-
		ΔT	20.10	18.31	14.98	-	20.05	18.26	14.93	-	20.30	18.51	15.18	-	20.03	18.24	14.91	-	19.79	18.01	14.67	-	20.91	19.12	15.79	-
		kW	3.40	3.40	3.39	-	3.82	3.82	3.81	-	4.29	4.28	4.28	-	4.80	4.79	4.78	-	5.36	5.36	5.35	-	6.03	6.02	6.02	-
		Amps	12.08	12.06	12.03	-	13.90	13.89	13.86	-	15.94	15.92	15.89	-	18.14	18.13	18.10	-	20.61	20.59	20.56	-	23.50	23.48	23.45	-
		Hi PR	262	263	265	-	303	305	306	-	347	348	350	-	394	395	397	-	444	446	447	-	498	500	501	-
		Lo PR	123	125	128	-	131	132	136	-	137	139	142	-	143	145	148	-	143	147	153	-	140	145	154	-
	1880	MBh	60.5	61.4	63.2	-	60.0	60.8	62.6	-	58.4	59.3	61.1	-	55.7	56.6	58.4	-	52.4	53.3	55.1	-	49.4	50.3	52.1	-
		S/T	0.62	0.55	0.43	-	0.63	0.56	0.43	-	0.65	0.58	0.45	-	0.67	0.60	0.46	-	0.71	0.63	0.48	-	0.80	0.71	0.55	-
		ΔT	18.22	16.44	13.10	-	18.17	16.39	13.06	-	18.42	16.64	13.31	-	18.16	16.37	13.04	-	17.92	16.13	12.80	-	19.03	17.25	13.92	-
		kW	3.44	3.43	3.43	-	3.86	3.85	3.85	-	4.33	4.32	4.32	-	4.83	4.83	4.82	-	5.40	5.40	5.39	-	6.06	6.06	6.05	-
		Amps	12.24	12.23	12.19	-	14.07	14.05	14.02	-	16.10	16.09	16.06	-	18.31	18.29	18.26	-	20.77	20.76	20.73	-	23.66	23.65	23.62	-
		Hi PR	266	267	269	-	307	308	310	-	351	352	354	-	398	399	401	-	448	449	451	-	502	503	505	-
		Lo PR	126	128	131	-	134	135	138	-	140	142	145	-	146	148	151	-	148	153	156	-	145	149	159	-
	2500	MBh	63.5	64.3	66.1	-	62.9	63.8	65.6	-	61.4	62.2	64.0	-	58.7	59.5	61.3	-	55.4	56.2	58.0	-	52.4	53.2	55.0	-
		S/T	0.69	0.61	0.45	-	0.70	0.61	0.46	-	0.73	0.64	0.48	-	0.75	0.66	0.49	-	0.78	0.68	0.50	-	0.88	0.78	0.59	-
		ΔT	16.03	14.24	10.91	-	15.98	14.19	10.86	-	16.23	14.45	11.11	-	15.96	14.18	10.84	-	15.72	13.94	10.61	-	16.84	15.06	11.72	-
		kW	3.48	3.48	3.47	-	3.90	3.90	3.89	-	4.37	4.37	4.36	-	4.88	4.87	4.87	-	5.44	5.44	5.43	-	6.11	6.10	6.10	-
		Amps	12.43	12.42	12.39	-	14.26	14.24	14.21	-	16.29	16.28	16.25	-	18.50	18.48	18.45	-	20.96	20.95	20.92	-	23.85	23.84	23.81	-
		Hi PR	272	273	275	-	313	314	316	-	357	358	360	-	403	405	406	-	454	455	457	-	508	509	511	-
		Lo PR	132	134	137	-	140	141	144	-	146	148	151	-	149	153	157	-	150	159	162	-	150	155	165	-
75	1500	MBh	59.6	60.5	62.3	65.0	59.1	59.9	61.7	64.5	57.5	58.4	60.2	62.9	54.8	55.7	57.5	60.2	51.5	52.4	54.2	56.9	48.5	49.4	51.2	53.9
		S/T	0.66	0.61	0.50	0.4	0.67	0.61	0.50	0.4	0.69	0.63	0.52	0.4	0.72	0.66	0.54	0.4	0.76	0.69	0.57	0.4	0.84	0.77	0.64	0.5
		ΔT	24.02	22.24	18.90	15.5	23.97	22.19	18.85	15.4	24.22	22.44	19.11	15.7	23.95	22.17	18.84	15.4	23.72	21.93	18.60	15.1	24.83	23.05	19.71	16.3
		kW	3.40	3.39	3.39	3.4	3.82	3.81	3.81	3.8	4.29	4.28	4.27	4.3	4.79	4.79	4.78	4.8	5.36	5.36	5.35	5.4	6.02	6.02	6.01	6.0
		Amps	12.06	12.05	12.02	12.2	13.89	13.87	13.84	14.0	15.93	15.91	15.88	16.0	18.13	18.12	18.09	18.2	20.60	20.58	20.55	20.7	23.49	23.47	23.44	23.6
		Hi PR	262	263	265	269.7	304	305	307	311.3	347	348	350	354.8	394	395	397	401.7	445	446	448	452.2	499	500	502	506.2
		Lo PR	123	125	128	133.3	131	132	136	140.9	137	139	142	147.5	139	145	148	153.1	139	150	153	158.6	139	148	156	165.5
	1880	MBh	60.8	61.7	63.5	66.2	60.3	61.2	63.0	65.7	58.7	59.6	61.4	64.1	56.0	**56.9**	58.7	61.4	52.8	53.6	55.4	58.1	49.7	50.6	52.4	55.1
		S/T	0.75	0.68	0.55	0.4	0.76	0.69	0.56	0.4	0.79	0.71	0.58	0.4	0.81	**0.74**	0.60	0.5	0.86	0.77	0.62	0.5	0.95	0.87	0.70	0.5
		ΔT	22.15	20.36	17.03	13.6	22.10	20.31	16.98	13.5	22.35	20.56	17.23	13.8	22.08	**20.29**	16.96	13.5	21.84	20.06	16.72	13.3	22.96	21.17	17.84	14.4
		kW	3.43	3.43	3.42	3.5	3.85	3.85	3.84	3.9	4.32	4.32	4.31	4.3	4.83	**4.83**	4.82	4.9	5.40	5.39	5.39	5.4	6.06	6.06	6.05	6.1
		Amps	12.23	12.21	12.18	12.3	14.05	14.04	14.01	14.1	16.09	16.08	16.05	16.2	18.30	**18.28**	18.25	18.4	20.76	20.75	20.71	20.9	23.65	23.64	23.60	23.7
		Hi PR	266	267	269	273.4	307	309	310	315.0	351	352	354	358.5	398	**399**	401	405.4	448	450	451	456.0	502	503	505	509.9
		Lo PR	126	128	131	136.2	134	135	138	143.8	139	142	145	150.4	139	**148**	151	156.0	138	153	156	161.5	139	153	162	168.4
	2500	MBh	63.8	64.6	66.4	69.2	63.2	64.1	65.9	68.6	61.7	62.5	64.3	67.0	59.0	59.8	61.6	64.4	55.7	56.5	58.3	61.1	52.7	53.5	55.3	58.0
		S/T	0.86	0.77	0.61	0.5	0.87	0.78	0.62	0.5	0.90	0.81	0.64	0.5	0.93	0.83	0.66	0.5	0.97	0.87	0.69	0.5	1.00	0.98	0.78	0.6
		ΔT	19.95	18.17	14.84	11.4	19.90	18.12	14.79	11.3	20.16	18.37	15.04	11.6	19.89	18.10	14.77	11.3	19.65	17.86	14.53	11.1	19.15	18.98	15.65	12.2
		kW	3.48	3.48	3.47	3.5	3.90	3.90	3.89	3.9	4.37	4.36	4.36	4.4	4.87	4.87	4.86	4.9	5.44	5.44	5.43	5.5	6.11	6.10	6.10	6.1
		Amps	12.42	12.41	12.37	12.5	14.25	14.23	14.20	14.3	16.28	16.27	16.24	16.4	18.49	18.47	18.44	18.6	20.95	20.94	20.91	21.0	23.84	23.83	23.80	23.9
		Hi PR	272	273	275	279.3	313	314	316	320.9	357	358	360	364.4	404	405	407	411.3	454	455	457	461.9	508	509	511	515.8
		Lo PR	132	134	137	142.2	140	141	144	149.7	139	148	151	156.4	139	154	157	162.0	139	159	162	167.5	159	159	169	174.4

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	1500	MBh	59.9	60.8	62.6	65.3	59.4	60.3	62.1	64.8	57.8	58.7	60.5	63.2	55.1	56.0	57.8	60.5	51.9	52.7	54.5	57.2	48.8	49.7	51.5	54.2
		S/T	0.77	0.71	0.60	0.5	0.78	0.72	0.61	0.5	0.80	0.74	0.63	0.5	0.83	0.77	0.65	0.5	0.88	0.81	0.68	0.6	0.97	0.90	0.76	0.6
		ΔT	27.97	26.19	22.85	19.4	27.92	26.14	22.81	19.4	28.17	26.39	23.06	19.6	27.90	26.12	22.79	19.3	27.67	25.88	22.55	19.1	28.78	27.00	23.67	20.2
		kW	3.40	3.40	3.39	3.4	3.82	3.82	3.81	3.8	4.29	4.28	4.28	4.3	4.79	4.79	4.78	4.8	5.36	5.36	5.35	5.4	6.03	6.02	6.02	6.0
		Amps	12.07	12.06	12.03	12.2	13.90	13.88	13.85	14.0	15.94	15.92	15.89	16.0	18.14	18.13	18.10	18.2	20.60	20.59	20.56	20.7	23.50	23.48	23.45	23.6
		Hi PR	263	264	266	270.2	304	305	307	311.8	348	349	351	355.3	395	396	398	402.2	445	446	448	452.7	499	500	502	506.7
		Lo PR	124	125	129	133.8	128	133	136	141.4	128	140	143	148.0	128	145	148	153.6	127	151	154	159.1	127	151	159	166.0
	1880	MBh	61.2	62.0	63.8	66.5	60.6	61.5	63.3	66.0	59.1	59.9	61.7	64.4	56.4	57.2	**59.0**	61.7	53.1	53.9	55.7	58.4	50.1	50.9	52.7	55.4
		S/T	0.88	0.81	0.68	0.5	0.89	0.82	0.68	0.5	0.92	0.85	0.71	0.6	0.96	0.88	**0.73**	0.6	1.00	0.92	0.77	0.6	1.00	1.00	0.86	0.7
		ΔT	26.10	24.31	20.98	17.5	26.05	24.26	20.93	17.5	26.30	24.52	21.18	17.7	26.03	24.25	**20.91**	17.5	25.66	24.01	20.68	17.2	24.20	24.61	21.79	18.3
		kW	3.44	3.43	3.43	3.5	3.86	3.85	3.85	3.9	4.33	4.32	4.31	4.3	4.83	4.83	**4.82**	4.9	5.40	5.40	5.39	5.4	6.06	6.06	6.05	6.1
		Amps	12.24	12.22	12.19	12.3	14.06	14.05	14.02	14.2	16.10	16.09	16.06	16.2	18.31	18.29	**18.26**	18.4	20.77	20.76	20.72	20.9	23.66	23.65	23.61	23.8
		Hi PR	266	267	269	273.9	308	309	311	315.5	351	353	354	359.0	398	399	**401**	405.9	449	450	452	456.5	503	504	506	510.4
		Lo PR	127	128	131	136.7	128	136	139	144.3	128	142	146	150.9	127	148	**151**	156.5	127	152	157	162.0	159	157	164	168.9
	2500	MBh	64.1	64.9	66.7	69.5	63.5	64.4	66.2	68.9	62.0	62.8	64.6	67.4	59.3	60.1	61.9	64.7	56.0	56.8	58.6	61.4	53.0	53.8	55.6	58.4
		S/T	1.00	0.94	0.77	0.6	1.00	0.94	0.78	0.6	1.00	0.98	0.81	0.6	1.00	1.00	0.83	0.6	1.00	1.00	0.87	0.7	1.00	1.00	0.97	0.8
		ΔT	23.30	22.12	18.79	15.3	23.11	22.07	18.74	15.3	22.54	22.32	18.99	15.5	21.56	21.87	18.72	15.3	20.36	20.67	18.48	15.0	19.26	19.57	19.60	16.1
		kW	3.48	3.48	3.47	3.5	3.90	3.90	3.89	3.9	4.37	4.37	4.36	4.4	4.88	4.87	4.87	4.9	5.44	5.44	5.43	5.5	6.11	6.10	6.10	6.1
		Amps	12.43	12.42	12.38	12.5	14.25	14.24	14.21	14.3	16.29	16.28	16.25	16.4	18.50	18.48	18.45	18.6	20.96	20.95	20.92	21.1	23.85	23.84	23.81	23.9
		Hi PR	272	273	275	279.8	314	315	317	321.4	357	358	360	364.9	404	405	407	411.8	455	456	458	462.3	509	510	512	516.3
		Lo PR	128	134	137	142.7	140	142	145	150.3	147	148	152	156.9	153	154	157	162.5	128	160	163	168.0	165	166	170	174.9
85	1500	MBh	61.0	61.8	63.6	66.3	60.4	61.3	63.1	65.8	58.9	59.7	61.5	64.2	56.2	57.0	58.8	61.5	52.9	53.7	55.5	58.2	49.9	50.7	52.5	55.2
		S/T	0.85	0.79	0.68	0.6	0.86	0.80	0.69	0.6	0.89	0.83	0.71	0.6	0.92	0.86	0.74	0.6	0.97	0.90	0.77	0.6	1.00	0.99	0.85	0.7
		ΔT	31.48	29.69	26.36	22.9	31.43	29.64	26.31	22.9	31.68	29.89	26.56	23.1	31.41	29.62	26.29	22.8	31.17	29.39	26.05	22.6	30.21	30.50	27.17	23.7
		kW	3.41	3.40	3.40	3.4	3.83	3.82	3.82	3.8	4.30	4.29	4.28	4.3	4.80	4.80	4.79	4.8	5.37	5.37	5.36	5.4	6.03	6.03	6.02	6.1
		Amps	12.11	12.09	12.06	12.2	13.93	13.92	13.89	14.0	15.97	15.96	15.93	16.1	18.18	18.16	18.13	18.3	20.64	20.63	20.59	20.7	23.53	23.52	23.48	23.6
		Hi PR	264	265	267	271.4	305	307	308	313.0	349	350	352	356.5	396	397	399	403.4	446	448	449	454.0	500	501	503	507.9
		Lo PR	115	127	130	135.7	115	135	138	143.3	115	141	145	149.9	114	142	150	155.5	115	142	156	161.0	156	141	163	167.9
	1880	MBh	62.2	63.0	64.8	67.6	61.6	62.5	64.3	67.0	60.1	60.9	62.7	65.4	57.4	58.2	60.0	62.8	54.1	54.9	56.7	59.5	51.1	51.9	53.7	56.4
		S/T	0.98	0.91	0.78	0.6	0.99	0.92	0.79	0.6	1.00	0.95	0.81	0.7	1.00	0.99	0.84	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.97	0.8
		ΔT	29.60	27.82	24.49	21.0	29.55	27.77	24.44	21.0	29.05	28.02	24.69	21.2	27.74	27.75	24.42	21.0	26.15	26.56	24.18	20.7	24.69	25.10	25.30	21.8
		kW	3.44	3.44	3.43	3.5	3.86	3.86	3.85	3.9	4.33	4.33	4.32	4.4	4.84	4.84	4.83	4.9	5.41	5.40	5.40	5.4	6.07	6.07	6.06	6.1
		Amps	12.27	12.26	12.23	12.4	14.10	14.08	14.05	14.2	16.14	16.12	16.09	16.2	18.34	18.33	18.30	18.4	20.80	20.79	20.76	20.9	23.69	23.68	23.65	23.8
		Hi PR	268	269	271	275.2	309	310	312	316.7	353	354	356	360.3	400	401	403	407.1	450	451	453	457.7	504	505	507	511.6
		Lo PR	114	130	133	138.6	115	138	141	146.2	143	142	148	152.8	148	142	153	158.4	154	155	159	163.9	161	142	165	170.8
	2500	MBh	65.1	65.9	67.7	70.5	64.6	65.4	67.2	69.9	63.0	63.8	65.6	68.4	60.3	61.1	62.9	65.7	57.0	57.8	59.6	62.4	54.0	54.8	56.6	59.4
		S/T	1.00	1.00	0.90	0.7	1.00	1.00	0.91	0.7	1.00	1.00	0.94	0.8	1.00	1.00	0.97	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9
		ΔT	23.67	23.98	22.29	18.8	23.48	23.78	22.24	18.8	22.91	23.21	22.49	19.0	21.93	22.23	22.22	18.8	20.73	21.03	21.69	18.5	19.63	19.94	20.59	19.7
		kW	3.49	3.49	3.48	3.5	3.91	3.91	3.90	3.9	4.38	4.37	4.37	4.4	4.88	4.88	4.87	4.9	5.45	5.45	5.44	5.5	6.12	6.11	6.11	6.1
		Amps	12.46	12.45	12.42	12.6	14.29	14.28	14.24	14.4	16.33	16.31	16.28	16.4	18.53	18.52	18.49	18.6	21.00	20.98	20.95	21.1	23.89	23.87	23.84	24.0
		Hi PR	273	275	276	281.1	315	316	318	322.6	359	360	362	366.2	405	407	408	413.0	456	457	459	463.6	510	511	513	517.5
		Lo PR	135	143	139	144.6	142	141	147	152.2	149	150	153	158.8	154	142	159	164.4	160	161	167	169.9	167	168	171	176.8

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	1050	MBh	42.8	43.5	44.7	-	42.5	43.1	44.4	-	41.3	41.9	43.2	-	39.4	40.0	41.3	-	37.0	37.6	38.9	-	34.9	35.5	36.8	-
		S/T	0.51	0.46	0.36	-	0.51	0.46	0.36	-	0.53	0.48	0.38	-	0.55	0.49	0.39	-	0.58	0.52	0.41	-	0.65	0.58	0.46	-
		ΔT	18.89	17.17	13.95	-	18.85	17.12	13.91	-	19.09	17.37	14.15	-	18.83	17.11	13.89	-	18.60	16.88	13.66	-	19.68	17.95	14.74	-
		kW	2.14	2.14	2.14	-	2.41	2.41	2.40	-	2.70	2.70	2.70	-	3.02	3.02	3.02	-	3.38	3.38	3.37	-	3.80	3.80	3.79	-
		Amps	7.62	7.62	7.60	-	8.77	8.76	8.74	-	10.05	10.05	10.03	-	11.44	11.43	11.41	-	12.99	12.98	12.96	-	14.81	14.80	14.78	-
		Hi PR	251	252	254	-	291	292	294	-	333	334	336	-	377	379	380	-	426	427	429	-	477	478	480	-
		Lo PR	127	129	132	-	135	137	140	-	142	144	147	-	145	149	153	-	146	151	158	-	144	148	156	-
	1240	MBh	43.5	44.1	45.4	-	43.1	43.8	45.0	-	42.0	42.6	43.9	-	40.1	40.7	42.0	-	37.7	38.3	39.6	-	35.5	36.2	37.4	-
		S/T	0.55	0.49	0.38	-	0.55	0.49	0.38	-	0.58	0.51	0.40	-	0.60	0.53	0.41	-	0.63	0.55	0.43	-	0.70	0.63	0.49	-
		ΔT	17.58	15.86	12.65	-	17.54	15.82	12.60	-	17.78	16.06	12.84	-	17.52	15.80	12.58	-	17.29	15.57	12.35	-	18.37	16.65	13.43	-
		kW	2.16	2.16	2.16	-	2.43	2.42	2.42	-	2.72	2.72	2.71	-	3.04	3.04	3.03	-	3.40	3.39	3.39	-	3.81	3.81	3.81	-
		Amps	7.70	7.69	7.67	-	8.85	8.84	8.82	-	10.13	10.12	10.10	-	11.52	11.51	11.49	-	13.07	13.06	13.04	-	14.88	14.87	14.85	-
		Hi PR	254	255	257	-	294	295	297	-	335	336	338	-	380	381	383	-	428	430	431	-	480	481	483	-
		Lo PR	130	131	135	-	137	139	142	-	144	146	149	-	149	152	155	-	149	155	161	-	147	151	161	-
	1750	MBh	46.3	46.9	48.2	-	45.9	46.5	47.8	-	44.8	45.4	46.7	-	42.9	43.5	44.8	-	40.5	41.1	42.4	-	38.3	38.9	40.2	-
		S/T	0.62	0.54	0.40	-	0.63	0.55	0.40	-	0.65	0.57	0.42	-	0.67	0.59	0.43	-	0.70	0.61	0.44	-	0.79	0.70	0.52	-
		ΔT	15.01	13.29	10.07	-	14.96	13.24	10.02	-	15.20	13.48	10.26	-	14.94	13.22	10.00	-	14.71	12.99	9.77	-	15.79	14.07	10.85	-
		kW	2.20	2.19	2.19	-	2.46	2.46	2.45	-	2.75	2.75	2.75	-	3.07	3.07	3.07	-	3.43	3.43	3.42	-	3.85	3.85	3.84	-
		Amps	7.85	7.84	7.82	-	8.99	8.98	8.96	-	10.28	10.27	10.25	-	11.66	11.65	11.63	-	13.21	13.20	13.18	-	15.03	15.02	15.00	-
		Hi PR	261	262	264	-	301	302	304	-	342	344	345	-	387	388	390	-	436	437	438	-	487	488	490	-
		Lo PR	138	139	143	-	146	147	150	-	150	154	157	-	150	160	163	-	149	161	169	-	150	158	168	-
75	1050	MBh	43.1	43.7	45.0	46.9	42.7	43.3	44.6	46.6	41.6	42.2	43.5	45.4	39.6	40.2	41.5	43.5	37.2	37.9	39.1	41.1	35.1	35.7	37.0	39.0
		S/T	0.61	0.55	0.46	0.4	0.61	0.56	0.46	0.4	0.64	0.58	0.48	0.4	0.66	0.60	0.49	0.4	0.69	0.63	0.51	0.4	0.77	0.70	0.58	0.5
		ΔT	22.68	20.96	17.74	14.4	22.63	20.91	17.69	14.4	22.87	21.15	17.94	14.6	22.62	20.89	17.68	14.3	22.39	20.66	17.45	14.1	23.46	21.74	18.52	15.2
		kW	2.14	2.14	2.14	2.2	2.41	2.41	2.40	2.4	2.70	2.70	2.70	2.7	3.02	3.02	3.01	3.0	3.38	3.38	3.37	3.4	3.80	3.79	3.79	3.8
		Amps	7.62	7.61	7.59	7.7	8.77	8.76	8.74	8.8	10.05	10.04	10.02	10.1	11.43	11.42	11.40	11.5	12.98	12.97	12.95	13.0	14.80	14.79	14.77	14.9
		Hi PR	252	253	254	258.8	291	292	294	298.5	333	334	336	340.1	378	379	381	384.9	426	427	429	433.3	478	479	480	484.8
		Lo PR	127	129	132	137.7	135	137	140	145.5	139	144	147	152.3	139	149	153	158.1	139	154	158	163.7	140	152	160	169.5
	1240	MBh	43.8	44.4	45.6	47.6	43.4	44.0	45.3	47.2	42.2	42.8	44.1	46.1	40.3	40.9	42.2	44.2	37.9	38.5	39.8	41.8	35.8	36.4	37.7	39.6
		S/T	0.67	0.60	0.49	0.4	0.67	0.61	0.49	0.4	0.70	0.63	0.51	0.4	0.72	0.65	0.53	0.4	0.76	0.69	0.55	0.4	0.84	0.77	0.62	0.5
		ΔT	21.37	19.65	16.43	13.1	21.32	19.60	16.39	13.1	21.57	19.84	16.63	13.3	21.31	19.58	16.37	13.0	21.08	19.35	16.14	12.8	22.16	20.43	17.22	13.9
		kW	2.16	2.16	2.15	2.2	2.42	2.42	2.42	2.4	2.72	2.72	2.71	2.7	3.04	3.04	3.03	3.1	3.39	3.39	3.39	3.4	3.81	3.81	3.81	3.8
		Amps	7.69	7.68	7.66	7.8	8.84	8.83	8.81	8.9	10.12	10.11	10.09	10.2	11.51	11.50	11.48	11.6	13.06	13.05	13.03	13.1	14.88	14.87	14.85	14.9
		Hi PR	254	255	257	261.4	294	295	297	301.1	336	337	338	342.8	380	381	383	387.6	429	430	432	435.9	480	481	483	487.5
		Lo PR	130	131	135	140.0	138	139	142	147.8	139	146	149	154.6	140	152	155	160.4	139	157	161	166.0	139	155	164	173.1
	1750	MBh	46.5	47.2	48.4	50.4	46.2	46.8	48.1	50.0	45.0	45.6	46.9	48.9	43.1	43.7	45.0	47.0	40.7	41.3	42.6	44.6	38.6	39.2	40.5	42.4
		S/T	0.78	0.70	0.55	0.4	0.78	0.70	0.55	0.4	0.81	0.73	0.58	0.4	0.84	0.75	0.59	0.4	0.87	0.78	0.61	0.4	0.98	0.88	0.70	0.5
		ΔT	18.79	17.07	13.86	10.5	18.75	17.03	13.81	10.5	18.99	17.27	14.05	10.7	18.73	17.01	13.79	10.5	18.50	16.78	13.56	10.2	19.58	17.86	14.64	11.3
		kW	2.19	2.19	2.19	2.2	2.46	2.46	2.45	2.5	2.75	2.75	2.75	2.8	3.07	3.07	3.07	3.1	3.43	3.43	3.42	3.4	3.85	3.84	3.84	3.9
		Amps	7.84	7.83	7.81	7.9	8.99	8.98	8.96	9.0	10.27	10.26	10.24	10.3	11.65	11.65	11.63	11.7	13.20	13.20	13.18	13.3	15.02	15.01	14.99	15.1
		Hi PR	261	262	264	268.6	301	302	304	308.3	343	344	346	349.9	387	389	390	394.7	436	437	439	443.1	487	488	490	494.6
		Lo PR	138	139	143	148.1	139	147	150	155.8	139	154	157	162.7	139	160	163	168.4	139	161	169	174.1	140	162	172	181.1

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	1050	MBh	43.3	43.9	45.2	47.2	42.9	43.5	44.8	46.8	41.8	42.4	43.7	45.6	39.8	40.4	41.7	43.7	37.5	38.1	39.4	41.3	35.3	35.9	37.2	39.2
		S/T	0.71	0.65	0.55	0.4	0.71	0.66	0.55	0.4	0.74	0.68	0.58	0.5	0.77	0.71	0.59	0.5	0.81	0.74	0.62	0.5	0.89	0.82	0.69	0.6
		ΔT	26.49	24.77	21.55	18.2	26.45	24.72	21.51	18.2	26.69	24.97	21.75	18.4	26.43	24.71	21.49	18.2	26.20	24.48	21.26	17.9	27.28	25.55	22.34	19.0
		kW	2.14	2.14	2.14	2.2	2.41	2.41	2.40	2.4	2.70	2.70	2.70	2.7	3.02	3.02	3.02	3.0	3.38	3.38	3.37	3.4	3.80	3.79	3.79	3.8
		Amps	7.62	7.61	7.59	7.7	8.77	8.76	8.74	8.8	10.05	10.04	10.02	10.1	11.44	11.43	11.41	11.5	12.99	12.98	12.96	13.0	14.81	14.80	14.78	14.9
		Hi PR	252	253	255	259.2	292	293	295	299.0	333	334	336	340.6	378	379	381	385.4	426	428	429	433.7	478	479	481	485.3
		Lo PR	128	130	133	138.3	128	137	141	146.1	127	144	147	152.9	128	150	153	158.6	128	152	159	164.3	127	152	163	171.4
	1240	MBh	44.0	44.6	45.9	47.8	43.6	44.2	45.5	47.5	42.5	43.1	44.4	46.3	40.5	41.1	**42.4**	44.4	38.2	38.8	40.1	42.0	36.0	36.6	37.9	39.9
		S/T	0.78	0.72	0.60	0.5	0.79	0.72	0.61	0.5	0.82	0.75	0.63	0.5	0.85	0.78	**0.65**	0.5	0.89	0.82	0.68	0.5	0.98	0.90	0.76	0.6
		ΔT	25.18	23.46	20.25	16.9	25.14	23.42	20.20	16.9	25.38	23.66	20.44	17.1	25.12	23.40	**20.18**	16.8	24.89	23.17	19.95	16.6	25.97	24.25	21.03	17.7
		kW	2.16	2.16	2.16	2.2	2.43	2.42	2.42	2.4	2.72	2.72	2.71	2.7	3.04	3.04	**3.03**	3.1	3.40	3.39	3.39	3.4	3.81	3.81	3.81	3.8
		Amps	7.70	7.69	7.67	7.8	8.85	8.84	8.82	8.9	10.13	10.12	10.10	10.2	11.51	11.51	**11.49**	11.6	13.06	13.05	13.04	13.1	14.88	14.87	14.85	14.9
		Hi PR	255	256	257	261.9	294	295	297	301.6	336	337	339	343.2	381	382	**384**	388.0	429	430	432	436.4	481	482	484	487.9
		Lo PR	128	132	135	140.6	128	140	143	148.4	128	146	150	155.2	127	152	**155**	160.9	128	153	161	166.6	127	152	167	173.7
	1750	MBh	46.8	47.4	48.7	50.6	46.4	47.0	48.3	50.2	45.3	45.9	47.1	49.1	43.3	43.9	45.2	47.2	40.9	41.6	42.8	44.8	38.8	39.4	40.7	42.6
		S/T	0.93	0.85	0.70	0.5	0.94	0.85	0.70	0.5	0.97	0.88	0.73	0.6	1.00	0.91	0.75	0.6	1.00	0.95	0.78	0.6	1.00	1.00	0.87	0.7
		ΔT	22.61	20.89	17.67	14.3	22.56	20.84	17.62	14.3	22.80	21.08	17.86	14.5	22.50	20.82	17.60	14.3	21.27	20.59	17.37	14.0	20.15	20.46	18.45	15.1
		kW	2.20	2.19	2.19	2.2	2.46	2.46	2.45	2.5	2.75	2.75	2.75	2.8	3.07	3.07	3.07	3.1	3.43	3.43	3.42	3.4	3.85	3.85	3.84	3.9
		Amps	7.84	7.83	7.82	7.9	8.99	8.98	8.96	9.1	10.27	10.26	10.24	10.3	11.66	11.65	11.63	11.7	13.21	13.20	13.18	13.3	15.03	15.02	15.00	15.1
		Hi PR	262	263	265	269.0	302	303	304	308.8	343	344	346	350.4	388	389	391	395.2	436	437	439	443.5	488	489	491	495.1
		Lo PR	128	140	143	148.6	128	148	151	156.4	127	152	158	163.2	159	152	164	169.0	164	152	169	174.6	170	169	175	181.7
85	1050	MBh	44.0	44.6	45.9	47.9	43.6	44.2	45.5	47.5	42.5	43.1	44.4	46.4	40.6	41.2	42.5	44.4	38.2	38.8	40.1	42.1	36.0	36.6	37.9	39.9
		S/T	0.78	0.73	0.63	0.5	0.79	0.73	0.63	0.5	0.82	0.76	0.65	0.5	0.85	0.79	0.68	0.6	0.89	0.83	0.71	0.6	0.98	0.91	0.78	0.6
		ΔT	29.87	28.15	24.94	21.6	29.83	28.11	24.89	21.6	30.07	28.35	25.13	21.8	29.81	28.09	24.87	21.5	29.58	27.86	24.64	21.3	30.66	28.94	25.72	22.4
		kW	2.15	2.15	2.14	2.2	2.41	2.41	2.41	2.4	2.71	2.71	2.70	2.7	3.03	3.03	3.02	3.0	3.38	3.38	3.38	3.4	3.80	3.80	3.80	3.8
		Amps	7.64	7.64	7.62	7.7	8.79	8.78	8.76	8.9	10.07	10.07	10.05	10.1	11.46	11.45	11.43	11.5	13.01	13.00	12.98	13.1	14.83	14.82	14.80	14.9
		Hi PR	253	254	256	260.4	293	294	296	300.1	335	336	337	341.8	379	380	382	386.6	428	429	431	434.9	479	480	482	486.5
		Lo PR	114	132	135	140.2	114	139	143	148.0	115	142	149	154.8	115	141	155	160.6	114	142	161	166.2	115	141	165	173.3
	1240	MBh	44.7	45.3	46.6	48.6	44.3	44.9	46.2	48.2	43.2	43.8	45.1	47.1	41.2	41.9	43.1	45.1	38.9	39.5	40.8	42.7	36.7	37.3	38.6	40.6
		S/T	0.87	0.81	0.69	0.6	0.88	0.81	0.70	0.6	0.91	0.84	0.72	0.6	0.94	0.87	0.74	0.6	0.99	0.92	0.78	0.6	1.00	1.00	0.86	0.7
		ΔT	28.57	26.84	23.63	20.3	28.52	26.80	23.58	20.2	28.76	27.04	23.82	20.5	28.50	26.78	23.56	20.2	28.27	26.55	23.33	20.0	26.92	27.36	24.41	21.1
		kW	2.17	2.16	2.16	2.2	2.43	2.43	2.42	2.4	2.73	2.72	2.72	2.7	3.04	3.04	3.04	3.1	3.40	3.40	3.39	3.4	3.82	3.82	3.81	3.8
		Amps	7.72	7.71	7.69	7.8	8.87	8.86	8.84	8.9	10.15	10.14	10.12	10.2	11.54	11.53	11.51	11.6	13.09	13.08	13.06	13.1	14.90	14.89	14.88	15.0
		Hi PR	256	257	259	263.1	296	297	298	302.8	337	338	340	344.4	382	383	385	389.2	430	431	433	437.6	482	483	485	489.1
		Lo PR	115	134	137	142.5	115	142	145	150.3	114	142	152	157.1	115	141	157	162.8	115	142	163	168.5	165	164	166	175.6
	1750	MBh	47.5	48.1	49.4	51.4	47.1	47.7	49.0	51.0	46.0	46.6	47.9	49.8	44.0	44.6	45.9	47.9	41.7	42.3	43.6	45.5	39.5	40.1	41.4	43.4
		S/T	1.00	0.97	0.82	0.7	1.00	0.98	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.92	0.7	1.00	1.00	1.00	0.8
		ΔT	24.67	24.27	21.05	17.7	24.47	24.22	21.00	17.7	23.88	24.20	21.25	17.9	22.88	23.19	20.99	17.7	21.65	21.96	20.76	17.4	20.52	20.84	21.51	18.5
		kW	2.20	2.20	2.19	2.2	2.46	2.46	2.46	2.5	2.76	2.76	2.75	2.8	3.08	3.08	3.07	3.1	3.43	3.43	3.43	3.4	3.85	3.85	3.85	3.9
		Amps	7.87	7.86	7.84	7.9	9.01	9.00	8.99	9.1	10.30	10.29	10.27	10.4	11.68	11.67	11.65	11.7	13.23	13.22	13.20	13.3	15.05	15.04	15.02	15.1
		Hi PR	263	264	266	270.2	303	304	306	310.0	344	345	347	351.6	389	390	392	396.4	437	439	440	444.7	489	490	492	496.3
		Lo PR	140	142	145	150.5	148	142	153	158.3	155	156	160	165.1	161	162	165	170.9	166	168	166	176.5	173	175	165	183.6

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	1800	MBh	69.6	70.6	72.7	-	69.0	70.0	72.1	-	67.2	68.2	70.3	-	64.0	65.0	67.1	-	60.2	61.2	63.2	-	56.6	57.6	59.7	-
		S/T	0.58	0.52	0.41	-	0.59	0.53	0.41	-	0.61	0.55	0.43	-	0.63	0.56	0.44	-	0.66	0.59	0.46	-	0.75	0.67	0.53	-
		ΔT	20.47	18.61	15.14	-	20.42	18.56	15.09	-	20.68	18.82	15.36	-	20.40	18.54	15.08	-	20.15	18.29	14.83	-	21.31	19.46	15.99	-
		kW	3.96	3.95	3.94	-	4.44	4.44	4.43	-	4.99	4.98	4.97	-	5.57	5.57	5.56	-	6.23	6.22	6.22	-	7.00	6.99	6.99	-
		Amps	14.45	14.44	14.40	-	16.57	16.55	16.52	-	18.93	18.91	18.87	-	21.48	21.46	21.43	-	24.33	24.32	24.28	-	27.68	27.66	27.63	-
		Hi PR	266	267	269	-	308	309	311	-	352	353	355	-	399	401	402	-	451	452	454	-	505	506	508	-
		Lo PR	123	125	128	-	131	133	136	-	138	139	142	-	142	145	148	-	142	148	153	-	139	144	154	-
	2150	MBh	70.8	71.8	73.9	-	70.2	71.2	73.3	-	68.3	69.3	71.4	-	65.2	66.2	68.3	-	61.3	62.3	64.4	-	57.8	58.8	60.9	-
		S/T	0.63	0.56	0.44	-	0.64	0.57	0.44	-	0.66	0.59	0.46	-	0.69	0.61	0.47	-	0.72	0.64	0.49	-	0.81	0.72	0.56	-
		ΔT	18.96	17.10	13.63	-	18.91	17.05	13.58	-	19.17	17.31	13.84	-	18.89	17.03	13.56	-	18.64	16.78	13.32	-	19.80	17.95	14.48	-
		kW	3.99	3.99	3.98	-	4.48	4.47	4.46	-	5.02	5.02	5.01	-	5.61	5.60	5.59	-	6.26	6.26	6.25	-	7.03	7.03	7.02	-
		Amps	14.60	14.59	14.55	-	16.72	16.70	16.66	-	19.08	19.06	19.02	-	21.63	21.61	21.58	-	24.48	24.47	24.43	-	27.83	27.81	27.78	-
		Hi PR	269	270	272	-	311	312	314	-	355	356	358	-	402	404	405	-	454	455	457	-	508	509	511	-
		Lo PR	126	127	131	-	133	135	138	-	140	142	145	-	146	147	150	-	146	151	156	-	144	148	157	-
	3000	MBh	75.1	76.1	78.2	-	74.5	75.5	77.6	-	72.6	73.6	75.7	-	69.5	70.5	72.6	-	65.6	66.6	68.7	-	62.1	63.1	65.2	-
		S/T	0.72	0.63	0.46	-	0.72	0.63	0.46	-	0.75	0.66	0.49	-	0.77	0.67	0.49	-	0.80	0.70	0.51	-	0.91	0.80	0.60	-
		ΔT	16.28	14.42	10.95	-	16.22	14.37	10.90	-	16.49	14.63	11.16	-	16.21	14.35	10.88	-	15.96	14.10	10.63	-	17.12	15.26	11.80	-
		kW	4.05	4.05	4.04	-	4.54	4.53	4.52	-	5.08	5.08	5.07	-	5.67	5.66	5.65	-	6.32	6.32	6.31	-	7.09	7.09	7.08	-
		Amps	14.86	14.84	14.81	-	16.98	16.96	16.92	-	19.34	19.32	19.28	-	21.89	21.87	21.84	-	24.74	24.72	24.69	-	28.09	28.07	28.04	-
		Hi PR	276	277	279	-	318	319	321	-	362	363	365	-	410	411	413	-	461	462	464	-	515	517	518	-
		Lo PR	133	135	138	-	141	142	146	-	147	149	152	-	149	155	158	-	149	159	163	-	150	155	165	-
75	1800	MBh	70.0	71.0	73.1	76.3	69.4	70.4	72.5	75.7	67.5	68.5	70.6	73.8	64.4	65.4	67.5	70.7	60.5	61.5	63.6	66.8	57.0	58.0	60.1	63.3
		S/T	0.69	0.63	0.52	0.4	0.70	0.64	0.52	0.4	0.73	0.66	0.54	0.4	0.75	0.69	0.56	0.4	0.79	0.72	0.59	0.5	0.88	0.80	0.66	0.5
		ΔT	24.55	22.69	19.23	15.6	24.50	22.64	19.18	15.6	24.76	22.91	19.44	15.8	24.48	22.63	19.16	15.6	24.23	22.38	18.91	15.3	25.40	23.54	20.07	16.5
		kW	3.95	3.95	3.94	4.0	4.44	4.44	4.43	4.5	4.98	4.98	4.97	5.0	5.57	5.57	5.56	5.6	6.23	6.22	6.21	6.3	7.00	6.99	6.98	7.0
		Amps	14.44	14.42	14.39	14.5	16.55	16.54	16.50	16.7	18.91	18.90	18.86	19.0	21.47	21.45	21.41	21.6	24.32	24.30	24.27	24.4	27.67	27.65	27.61	27.8
		Hi PR	266	267	269	273.7	308	309	311	315.8	352	353	355	359.9	400	401	403	407.3	451	452	454	458.5	505	507	508	513.1
		Lo PR	124	125	128	133.5	131	133	136	141.0	138	139	142	147.6	139	145	148	153.2	140	149	153	158.7	139	147	156	165.6
	2150	MBh	71.2	72.2	74.3	77.5	70.5	71.5	73.6	76.8	68.7	69.7	71.8	75.0	65.5	**66.5**	68.6	71.8	61.7	62.7	64.8	68.0	58.2	59.2	61.3	64.5
		S/T	0.77	0.69	0.56	0.4	0.77	0.70	0.57	0.4	0.80	0.73	0.59	0.5	0.83	**0.75**	0.61	0.5	0.87	0.79	0.64	0.5	0.97	0.88	0.72	0.5
		ΔT	23.04	21.18	17.72	14.1	22.99	21.13	17.67	14.1	23.25	21.39	17.93	14.3	22.97	**21.11**	17.65	14.1	22.72	20.87	17.40	13.8	23.89	22.03	18.56	15.0
		kW	3.99	3.98	3.98	4.0	4.47	4.47	4.46	4.5	5.02	5.01	5.00	5.0	5.60	**5.60**	5.59	5.6	6.26	6.26	6.25	6.3	7.03	7.03	7.02	7.1
		Amps	14.59	14.57	14.54	14.7	16.70	16.69	16.65	16.8	19.06	19.04	19.01	19.2	21.61	**21.60**	21.56	21.7	24.47	24.45	24.42	24.6	27.82	27.80	27.76	27.9
		Hi PR	269	270	272	276.7	311	312	314	318.8	355	356	358	362.9	403	**404**	406	410.3	454	455	457	461.5	508	510	511	516.1
		Lo PR	126	127	131	135.8	133	135	138	143.4	139	142	145	150.0	139	**147**	150	155.6	139	153	156	161.1	140	150	160	167.9
	3000	MBh	75.5	76.5	78.6	81.8	74.8	75.8	77.9	81.1	73.0	74.0	76.1	79.3	69.9	70.8	72.9	76.1	66.0	67.0	69.1	72.3	62.5	63.5	65.6	68.8
		S/T	0.89	0.80	0.63	0.5	0.90	0.80	0.63	0.5	0.93	0.83	0.66	0.5	0.96	0.86	0.68	0.5	1.00	0.90	0.70	0.5	1.00	1.00	0.80	0.6
		ΔT	20.36	18.50	15.03	11.4	20.31	18.45	14.98	11.4	20.57	18.71	15.24	11.7	20.29	18.43	14.96	11.4	20.00	18.18	14.72	11.1	18.93	19.24	15.88	12.3
		kW	4.05	4.04	4.03	4.1	4.53	4.53	4.52	4.6	5.08	5.07	5.06	5.1	5.66	5.66	5.65	5.7	6.32	6.32	6.31	6.3	7.09	7.09	7.08	7.1
		Amps	14.85	14.83	14.80	15.0	16.96	16.95	16.91	17.1	19.32	19.30	19.27	19.4	21.87	21.86	21.82	22.0	24.73	24.71	24.68	24.8	28.08	28.06	28.02	28.2
		Hi PR	276	277	279	284.0	318	320	321	326.1	362	364	365	370.1	410	411	413	417.6	461	462	464	468.7	516	517	519	523.3
		Lo PR	133	135	138	143.3	140	142	146	150.8	140	149	152	157.4	139	155	158	163.0	157	160	163	168.5	160	162	167	175.4

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	1800	MBh	70.4	71.3	73.4	76.6	69.7	70.7	72.8	76.0	67.9	68.9	71.0	74.2	64.7	65.7	67.8	71.0	60.9	61.9	64.0	67.2	57.4	58.4	60.5	63.7
		S/T	0.81	0.74	0.63	0.5	0.81	0.75	0.63	0.5	0.84	0.78	0.66	0.5	0.87	0.81	0.68	0.5	0.92	0.85	0.71	0.6	1.00	0.94	0.79	0.6
		ΔT	28.66	26.81	23.34	19.7	28.61	26.76	23.29	19.7	28.87	27.02	23.55	20.0	28.59	26.74	23.27	19.7	28.34	26.49	23.02	19.4	28.97	27.65	24.18	20.6
		kW	3.96	3.95	3.94	4.0	4.44	4.44	4.43	4.5	4.98	4.98	4.97	5.0	5.57	5.57	5.56	5.6	6.23	6.22	6.22	6.3	7.00	6.99	6.99	7.0
		Amps	14.45	14.43	14.40	14.6	16.57	16.55	16.51	16.7	18.92	18.91	18.87	19.0	21.48	21.46	21.43	21.6	24.33	24.31	24.28	24.4	27.68	27.66	27.63	27.8
		Hi PR	267	268	270	274.2	309	310	312	316.3	353	354	356	360.4	400	401	403	407.8	451	452	454	459.0	506	507	509	513.6
		Lo PR	124	126	129	134.0	128	133	136	141.6	128	140	143	148.2	128	145	148	153.8	127	151	154	159.3	146	149	158	166.1
	2150	MBh	71.5	72.5	74.6	77.8	70.9	71.9	74.0	77.2	69.1	70.1	72.2	75.4	65.9	66.9	**69.0**	72.2	62.1	63.0	65.1	68.3	58.5	59.5	61.6	64.8
		S/T	0.90	0.82	0.69	0.6	0.90	0.83	0.70	0.6	0.94	0.86	0.72	0.6	0.97	0.89	**0.75**	0.6	1.00	0.94	0.78	0.6	1.00	1.00	0.87	0.7
		ΔT	27.15	25.29	21.83	18.2	27.10	25.24	21.78	18.2	27.36	25.50	22.04	18.4	27.08	25.22	**21.76**	18.2	26.24	24.98	21.51	17.9	24.75	25.17	22.67	19.1
		kW	3.99	3.99	3.98	4.0	4.48	4.47	4.46	4.5	5.02	5.01	5.01	5.0	5.61	5.60	**5.59**	5.6	6.26	6.26	6.25	6.3	7.03	7.03	7.02	7.1
		Amps	14.60	14.58	14.55	14.7	16.71	16.70	16.66	16.8	19.07	19.06	19.02	19.2	21.63	21.61	**21.57**	21.7	24.48	24.46	24.43	24.6	27.83	27.81	27.77	27.9
		Hi PR	270	271	273	277.2	312	313	315	319.3	356	357	359	363.3	403	404	**406**	410.8	454	455	457	462.0	509	510	512	516.5
		Lo PR	126	128	131	136.4	127	135	139	143.9	128	142	145	150.5	128	148	**151**	156.1	152	152	156	161.6	157	156	163	168.5
	3000	MBh	75.8	76.8	78.9	82.1	75.2	76.2	78.3	81.5	73.4	74.4	76.5	79.7	70.2	71.2	73.3	76.5	66.4	67.4	69.5	72.7	62.8	63.8	65.9	69.1
		S/T	1.00	0.97	0.80	0.6	1.00	0.98	0.80	0.6	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.89	0.7	1.00	1.00	1.00	0.8
		ΔT	22.98	22.61	19.14	15.6	22.79	22.56	19.09	15.5	22.23	22.54	19.36	15.8	21.28	21.58	19.08	15.5	20.11	20.41	18.83	15.2	19.04	19.35	19.98	16.4
		kW	4.05	4.05	4.04	4.1	4.54	4.53	4.52	4.6	5.08	5.07	5.07	5.1	5.67	5.66	5.65	5.7	6.32	6.32	6.31	6.3	7.09	7.09	7.08	7.1
		Amps	14.86	14.84	14.81	15.0	16.97	16.96	16.92	17.1	19.33	19.32	19.28	19.4	21.89	21.87	21.83	22.0	24.74	24.72	24.69	24.8	28.09	28.07	28.03	28.2
		Hi PR	277	278	280	284.5	319	320	322	326.5	363	364	366	370.6	410	412	413	418.1	462	463	465	469.2	516	517	519	523.8
		Lo PR	134	135	139	143.8	141	143	146	151.4	148	153	153	158.0	154	153	158	163.6	159	152	164	169.0	127	167	175	175.9
85	1800	MBh	71.5	72.5	74.6	77.8	70.9	71.9	74.0	77.2	69.1	70.1	72.2	75.4	65.9	66.9	69.0	72.2	62.1	63.1	65.2	68.4	58.5	59.5	61.6	64.8
		S/T	0.89	0.83	0.72	0.6	0.90	0.84	0.72	0.6	0.93	0.87	0.75	0.6	0.97	0.90	0.77	0.6	1.00	0.95	0.81	0.7	1.00	1.00	0.89	0.7
		ΔT	32.31	30.45	26.98	23.4	32.26	30.40	26.93	23.3	32.52	30.66	27.19	23.6	32.24	30.38	26.91	23.3	31.35	30.13	26.67	23.1	29.57	30.07	27.83	24.2
		kW	3.97	3.96	3.95	4.0	4.45	4.45	4.44	4.5	4.99	4.99	4.98	5.0	5.58	5.58	5.57	5.6	6.24	6.23	6.23	6.3	7.01	7.00	7.00	7.0
		Amps	14.49	14.48	14.44	14.6	16.61	16.59	16.55	16.7	18.97	18.95	18.91	19.1	21.52	21.50	21.47	21.6	24.37	24.36	24.32	24.5	27.72	27.70	27.67	27.8
		Hi PR	268	269	271	275.5	310	311	313	317.5	354	355	357	361.6	401	403	404	409.1	453	454	456	460.2	507	508	510	514.8
		Lo PR	114	127	131	135.9	115	135	138	143.4	115	142	145	150.0	114	142	150	155.6	151	142	156	161.1	157	156	163	168.0
	2150	MBh	72.7	73.7	75.8	79.0	72.1	73.1	75.2	78.4	70.2	71.2	73.3	76.5	67.1	68.1	70.2	73.4	63.2	64.2	66.3	69.5	59.7	60.7	62.8	66.0
		S/T	1.00	0.93	0.79	0.7	1.00	0.94	0.80	0.7	1.00	0.97	0.83	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.90	0.7	1.00	1.00	0.99	0.8
		ΔT	30.74	28.94	25.47	21.9	30.48	28.89	25.42	21.8	29.70	29.15	25.68	22.1	28.37	28.79	25.40	21.8	26.74	27.16	25.16	21.6	25.25	25.67	26.32	22.7
		kW	4.00	4.00	3.99	4.0	4.49	4.48	4.47	4.5	5.03	5.02	5.02	5.1	5.62	5.61	5.60	5.6	6.27	6.27	6.26	6.3	7.04	7.04	7.03	7.1
		Amps	14.64	14.62	14.59	14.7	16.75	16.74	16.70	16.9	19.11	19.10	19.06	19.2	21.67	21.65	21.61	21.8	24.52	24.50	24.47	24.6	27.87	27.85	27.81	28.0
		Hi PR	271	272	274	278.5	313	314	316	320.5	357	358	360	364.6	404	406	407	412.0	456	457	459	463.2	510	511	513	517.8
		Lo PR	128	130	133	138.2	136	137	141	145.8	142	141	147	152.4	148	150	153	158.0	153	142	158	163.5	160	162	165	170.3
	3000	MBh	77.0	78.0	80.1	83.3	76.4	77.4	79.5	82.7	74.6	75.5	77.6	80.8	71.4	72.4	74.5	77.7	67.5	68.5	70.6	73.8	64.0	65.0	67.1	70.3
		S/T	1.00	1.00	0.94	0.8	1.00	1.00	0.94	0.8	1.00	1.00	0.98	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9
		ΔT	23.34	23.64	22.79	19.2	23.15	23.45	22.74	19.1	22.59	22.89	23.00	19.4	21.64	21.94	22.57	19.1	20.47	20.77	21.41	18.9	19.40	19.70	20.34	20.0
		kW	4.06	4.06	4.05	4.1	4.55	4.54	4.53	4.6	5.09	5.08	5.08	5.1	5.68	5.67	5.66	5.7	6.33	6.33	6.32	6.4	7.10	7.10	7.09	7.1
		Amps	14.90	14.88	14.85	15.0	17.01	17.00	16.96	17.1	19.37	19.36	19.32	19.5	21.93	21.91	21.87	22.0	24.78	24.76	24.73	24.9	28.13	28.11	28.07	28.2
		Hi PR	278	279	281	285.7	320	321	323	327.8	364	365	367	371.9	412	413	415	419.3	463	464	466	470.5	517	519	520	525.1
		Lo PR	136	142	140	145.7	143	145	148	153.2	150	151	155	159.8	155	157	167	165.4	161	162	166	170.9	168	142	172	177.8

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	1260	MBh	50.0	50.7	52.2	-	49.6	50.3	51.8	-	48.3	49.0	50.5	-	46.0	46.7	48.2	-	43.2	43.9	45.4	-	40.7	41.4	42.9	-
		S/T	0.55	0.49	0.39	-	0.55	0.50	0.39	-	0.58	0.52	0.41	-	0.60	0.53	0.42	-	0.63	0.56	0.44	-	0.70	0.63	0.50	-
		ΔT	19.84	18.05	14.70	-	19.79	18.00	14.65	-	20.04	18.25	14.90	-	19.77	17.98	14.63	-	19.53	17.74	14.39	-	20.65	18.86	15.52	-
		kW	2.49	2.48	2.48	-	2.79	2.79	2.79	-	3.13	3.13	3.13	-	3.50	3.50	3.50	-	3.92	3.91	3.91	-	4.40	4.40	4.39	-
		Amps	9.09	9.08	9.05	-	10.42	10.41	10.38	-	11.90	11.89	11.87	-	13.51	13.50	13.47	-	15.30	15.29	15.27	-	17.41	17.40	17.37	-
		Hi PR	254	255	257	-	294	295	297	-	336	337	339	-	382	383	385	-	431	432	433	-	483	484	486	-
		Lo PR	127	128	132	-	135	136	139	-	141	143	146	-	143	147	152	-	144	149	158	-	140	146	154	-
	1520	MBh	50.9	51.6	53.1	-	50.5	51.2	52.7	-	49.1	49.8	51.4	-	46.9	47.6	49.1	-	44.1	44.8	46.3	-	41.6	42.3	43.8	-
		S/T	0.60	0.53	0.41	-	0.60	0.54	0.42	-	0.63	0.56	0.43	-	0.65	0.58	0.45	-	0.68	0.60	0.46	-	0.77	0.68	0.53	-
		ΔT	18.29	16.50	13.16	-	18.25	16.45	13.11	-	18.50	16.71	13.36	-	18.23	16.43	13.09	-	17.99	16.20	12.85	-	19.11	17.32	13.97	-
		kW	2.51	2.51	2.50	-	2.82	2.81	2.81	-	3.16	3.15	3.15	-	3.53	3.52	3.52	-	3.94	3.94	3.93	-	4.42	4.42	4.42	-
		Amps	9.18	9.17	9.15	-	10.51	10.50	10.48	-	12.00	11.99	11.97	-	13.60	13.59	13.57	-	15.40	15.39	15.37	-	17.50	17.49	17.47	-
		Hi PR	257	258	260	-	297	298	300	-	339	340	342	-	385	386	388	-	434	435	436	-	486	487	489	-
		Lo PR	129	131	134	-	137	139	142	-	144	145	149	-	147	151	154	-	147	153	160	-	145	150	159	-
	2100	MBh	53.9	54.6	56.1	-	53.4	54.1	55.6	-	52.1	52.8	54.3	-	49.8	50.5	52.0	-	47.1	47.8	49.3	-	44.5	45.2	46.7	-
		S/T	0.68	0.59	0.44	-	0.68	0.60	0.44	-	0.71	0.62	0.46	-	0.73	0.64	0.47	-	0.76	0.66	0.48	-	0.86	0.76	0.57	-
		ΔT	15.79	13.99	10.65	-	15.74	13.95	10.60	-	15.99	14.20	10.85	-	15.72	13.93	10.58	-	15.48	13.69	10.34	-	16.60	14.81	11.46	-
		kW	2.55	2.54	2.54	-	2.85	2.85	2.84	-	3.19	3.19	3.19	-	3.56	3.56	3.56	-	3.98	3.97	3.97	-	4.46	4.46	4.45	-
		Amps	9.34	9.33	9.31	-	10.67	10.66	10.64	-	12.16	12.15	12.12	-	13.76	13.75	13.73	-	15.56	15.55	15.52	-	17.66	17.65	17.63	-
		Hi PR	264	265	267	-	304	305	307	-	346	347	349	-	391	392	394	-	440	441	443	-	492	494	495	-
		Lo PR	137	138	141	-	144	146	149	-	150	153	156	-	149	159	162	-	150	160	167	-	150	157	167	-
75	1260	MBh	50.3	51.0	52.5	54.8	49.8	50.5	52.1	54.4	48.5	49.2	50.7	53.0	46.2	47.0	48.5	50.8	43.5	44.2	45.7	48.0	40.9	41.7	43.2	45.5
		S/T	0.66	0.60	0.49	0.4	0.66	0.60	0.50	0.4	0.69	0.62	0.51	0.4	0.71	0.65	0.53	0.4	0.75	0.68	0.56	0.4	0.83	0.76	0.62	0.5
		ΔT	23.78	21.99	18.64	15.2	23.73	21.94	18.59	15.1	23.98	22.19	18.84	15.4	23.71	21.92	18.57	15.1	23.47	21.68	18.33	14.9	24.59	22.80	19.46	16.0
		kW	2.49	2.48	2.48	2.5	2.79	2.79	2.78	2.8	3.13	3.13	3.12	3.1	3.50	3.50	3.49	3.5	3.91	3.91	3.91	3.9	4.40	4.40	4.39	4.4
		Amps	9.08	9.07	9.04	9.1	10.41	10.40	10.37	10.5	11.89	11.88	11.86	12.0	13.50	13.49	13.46	13.6	15.29	15.28	15.26	15.4	17.40	17.39	17.36	17.5
		Hi PR	254	255	257	261.5	294	296	297	301.8	337	338	339	343.9	382	383	385	389.2	431	432	434	438.1	483	484	486	490.3
		Lo PR	127	128	132	137.1	135	136	139	144.9	139	143	146	151.6	139	149	152	157.4	138	152	158	163.0	139	148	158	167.5
	1520	MBh	51.2	51.9	53.4	55.7	50.7	51.4	52.9	55.2	49.4	50.1	51.6	53.9	47.1	47.8	49.3	51.7	44.4	45.1	46.6	48.9	41.8	42.5	44.0	46.4
		S/T	0.73	0.66	0.54	0.4	0.73	0.66	0.54	0.4	0.76	0.69	0.56	0.4	0.79	0.71	0.58	0.4	0.83	0.75	0.60	0.5	0.92	0.84	0.68	0.5
		ΔT	22.23	20.44	17.10	13.6	22.19	20.39	17.05	13.6	22.44	20.65	17.30	13.8	22.17	20.37	17.03	13.6	21.93	20.14	16.79	13.3	23.05	21.26	17.91	14.4
		kW	2.51	2.51	2.50	2.5	2.81	2.81	2.81	2.8	3.16	3.15	3.15	3.2	3.52	3.52	3.52	3.5	3.94	3.93	3.93	4.0	4.42	4.42	4.41	4.4
		Amps	9.18	9.17	9.14	9.2	10.51	10.49	10.47	10.6	11.99	11.98	11.96	12.1	13.60	13.59	13.56	13.7	15.39	15.38	15.36	15.5	17.50	17.49	17.46	17.6
		Hi PR	257	258	260	264.6	297	299	300	304.8	340	341	342	346.9	385	386	388	392.2	434	435	437	441.2	486	487	489	493.3
		Lo PR	129	131	134	139.6	137	139	142	147.4	139	146	149	154.2	139	151	154	159.9	140	156	160	165.6	139	152	162	172.6
	2100	MBh	54.1	54.8	56.3	58.6	53.7	54.4	55.9	58.2	52.4	53.1	54.6	56.9	50.1	50.8	52.3	54.6	47.3	48.0	49.5	51.8	44.8	45.5	47.0	49.3
		S/T	0.84	0.76	0.60	0.4	0.85	0.76	0.60	0.4	0.88	0.79	0.63	0.5	0.91	0.81	0.64	0.5	0.95	0.85	0.67	0.5	1.00	0.95	0.76	0.6
		ΔT	19.73	17.93	14.59	11.1	19.68	17.89	14.54	11.1	19.93	18.14	14.79	11.3	19.66	17.87	14.52	11.1	19.42	17.63	14.28	10.8	19.39	18.75	15.40	11.9
		kW	2.54	2.54	2.54	2.6	2.85	2.85	2.84	2.9	3.19	3.19	3.18	3.2	3.56	3.56	3.55	3.6	3.97	3.97	3.97	4.0	4.46	4.46	4.45	4.5
		Amps	9.33	9.32	9.30	9.4	10.66	10.65	10.63	10.7	12.15	12.14	12.11	12.2	13.75	13.74	13.72	13.8	15.55	15.54	15.52	15.6	17.65	17.64	17.62	17.7
		Hi PR	264	265	267	271.2	304	305	307	311.4	346	347	349	353.6	392	393	394	398.9	440	442	443	447.8	493	494	496	500.0
		Lo PR	137	138	142	147.0	139	146	149	154.7	140	153	156	161.5	139	159	162	167.2	139	162	167	172.9	158	160	169	179.9

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

			Outdoor Ambient Temperature																							
			65				75				85				95				105				115			
			Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	ID WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	1260	MBh	50.5	51.3	52.8	55.1	50.1	50.8	52.3	54.6	48.8	49.5	51.0	53.3	46.5	47.2	48.7	51.0	43.7	44.5	46.0	48.3	41.2	41.9	43.4	45.7
		S/T	0.76	0.70	0.59	0.5	0.77	0.71	0.60	0.5	0.79	0.73	0.62	0.5	0.82	0.76	0.64	0.5	0.87	0.80	0.67	0.5	0.96	0.89	0.75	0.6
		ΔT	27.75	25.95	22.61	19.1	27.70	25.90	22.56	19.1	27.95	26.16	22.81	19.3	27.68	25.89	22.54	19.1	27.44	25.65	22.30	18.8	28.56	26.77	23.42	20.0
		kW	2.49	2.48	2.48	2.5	2.79	2.79	2.79	2.8	3.13	3.13	3.13	3.1	3.50	3.50	3.50	3.5	3.92	3.91	3.91	3.9	4.40	4.40	4.39	4.4
		Amps	9.08	9.07	9.05	9.2	10.41	10.40	10.38	10.5	11.90	11.89	11.87	12.0	13.50	13.49	13.47	13.6	15.30	15.29	15.27	15.4	17.40	17.39	17.37	17.5
		Hi PR	255	256	258	262.0	295	296	298	302.2	337	338	340	344.3	382	383	385	389.7	431	432	434	438.6	483	485	486	490.8
		Lo PR	127	129	132	137.7	127	137	140	145.4	128	144	147	152.2	128	149	153	158.0	127	152	158	163.6	128	152	160	170.6
	1520	MBh	51.4	52.1	53.6	56.0	51.0	51.7	53.2	55.5	49.7	50.4	51.9	54.2	47.4	48.1	**49.6**	51.9	44.6	45.3	46.8	49.1	42.1	42.8	44.3	46.6
		S/T	0.85	0.78	0.66	0.5	0.86	0.79	0.66	0.5	0.89	0.82	0.69	0.5	0.92	0.85	**0.71**	0.6	0.97	0.89	0.74	0.6	1.00	0.99	0.83	0.7
		ΔT	26.20	24.41	21.06	17.6	26.15	24.36	21.01	17.5	26.40	24.61	21.27	17.8	26.13	24.34	**21.00**	17.5	25.89	24.10	20.76	17.3	25.17	25.22	21.88	18.4
		kW	2.51	2.51	2.50	2.5	2.82	2.81	2.81	2.8	3.16	3.15	3.15	3.2	3.53	3.52	**3.52**	3.5	3.94	3.94	3.93	4.0	4.42	4.42	4.42	4.4
		Amps	9.18	9.17	9.15	9.3	10.51	10.50	10.48	10.6	12.00	11.99	11.96	12.1	13.60	13.59	**13.57**	13.7	15.40	15.39	15.36	15.5	17.50	17.49	17.47	17.6
		Hi PR	258	259	261	265.0	298	299	301	305.2	340	341	343	347.4	385	386	**388**	392.7	434	435	437	441.6	486	488	489	493.8
		Lo PR	127	132	135	140.2	127	139	143	148.0	128	146	149	154.7	128	152	**155**	160.5	127	152	161	166.1	156	152	165	173.2
	2100	MBh	54.4	55.1	56.6	58.9	53.9	54.6	56.2	58.5	52.6	53.3	54.8	57.1	50.3	51.1	52.6	54.9	47.6	48.3	49.8	52.1	45.0	45.8	47.3	49.6
		S/T	1.00	0.92	0.76	0.6	1.00	0.92	0.76	0.6	1.00	0.96	0.79	0.6	1.00	0.99	0.81	0.6	1.00	1.00	0.85	0.7	1.00	1.00	0.95	0.7
		ΔT	23.54	21.90	18.56	15.1	23.35	21.85	18.51	15.0	22.78	22.10	18.76	15.3	21.80	21.83	18.49	15.0	20.60	20.91	18.25	14.8	19.50	19.81	19.37	15.9
		kW	2.55	2.54	2.54	2.6	2.85	2.85	2.84	2.9	3.19	3.19	3.19	3.2	3.56	3.56	3.55	3.6	3.98	3.97	3.97	4.0	4.46	4.46	4.45	4.5
		Amps	9.34	9.33	9.31	9.4	10.67	10.66	10.64	10.7	12.16	12.14	12.12	12.2	13.76	13.75	13.73	13.8	15.56	15.55	15.52	15.6	17.66	17.65	17.63	17.7
		Hi PR	264	265	267	271.7	305	306	307	311.9	347	348	350	354.0	392	393	395	399.4	441	442	444	448.3	493	494	496	500.5
		Lo PR	137	139	142	147.5	145	147	150	155.3	152	152	157	162.1	158	153	162	167.8	163	165	168	173.4	170	171	172	180.5
85	1260	MBh	51.4	52.1	53.6	55.9	50.9	51.7	53.2	55.5	49.6	50.3	51.8	54.2	47.4	48.1	49.6	51.9	44.6	45.3	46.8	49.1	42.1	42.8	44.3	46.6
		S/T	0.84	0.78	0.68	0.6	0.85	0.79	0.68	0.6	0.88	0.82	0.70	0.6	0.91	0.85	0.73	0.6	0.96	0.89	0.76	0.6	1.00	0.98	0.84	0.7
		ΔT	31.26	29.47	26.13	22.7	31.21	29.42	26.08	22.6	31.47	29.67	26.33	22.9	31.20	29.40	26.06	22.6	30.96	29.16	25.82	22.4	30.35	30.29	26.94	23.5
		kW	2.49	2.49	2.49	2.5	2.80	2.80	2.79	2.8	3.14	3.14	3.13	3.2	3.51	3.51	3.50	3.5	3.92	3.92	3.91	3.9	4.41	4.40	4.40	4.4
		Amps	9.11	9.10	9.08	9.2	10.44	10.43	10.41	10.5	11.92	11.91	11.89	12.0	13.53	13.52	13.50	13.6	15.32	15.31	15.29	15.4	17.43	17.42	17.40	17.5
		Hi PR	256	257	259	263.2	296	297	299	303.4	338	339	341	345.5	384	385	386	390.9	432	434	435	439.8	485	486	488	492.0
		Lo PR	115	131	134	139.6	115	139	142	147.3	115	142	149	154.1	115	142	154	159.9	115	141	160	165.5	155	142	165	172.6
	1520	MBh	52.3	53.0	54.5	56.8	51.8	52.5	54.0	56.3	50.5	51.2	52.7	55.0	48.2	49.0	50.5	52.8	45.5	46.2	47.7	50.0	42.9	43.7	45.2	47.5
		S/T	0.95	0.88	0.75	0.6	0.96	0.89	0.76	0.6	0.99	0.92	0.79	0.6	1.00	0.95	0.81	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.94	0.8
		ΔT	29.72	27.93	24.58	21.1	29.67	27.88	24.53	21.1	29.92	28.13	24.78	21.3	28.85	27.86	24.51	21.0	27.19	27.62	24.27	20.8	25.68	26.11	25.40	21.9
		kW	2.52	2.51	2.51	2.5	2.82	2.82	2.81	2.8	3.16	3.16	3.15	3.2	3.53	3.53	3.52	3.5	3.94	3.94	3.94	4.0	4.43	4.43	4.42	4.4
		Amps	9.21	9.20	9.18	9.3	10.54	10.53	10.50	10.6	12.02	12.01	11.99	12.1	13.63	13.62	13.60	13.7	15.42	15.41	15.39	15.5	17.53	17.52	17.50	17.6
		Hi PR	259	260	262	266.2	299	300	302	306.4	341	342	344	348.6	387	388	389	393.9	435	437	438	442.8	488	489	491	495.0
		Lo PR	115	133	137	142.1	115	141	144	149.9	115	141	151	156.7	152	142	157	162.4	158	141	163	168.0	165	166	166	175.1
	2100	MBh	55.2	56.0	57.5	59.8	54.8	55.5	57.0	59.3	53.5	54.2	55.7	58.0	51.2	51.9	53.4	55.7	48.4	49.1	50.6	53.0	45.9	46.6	48.1	50.4
		S/T	1.00	1.00	0.89	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.92	0.7	1.00	1.00	0.95	0.8	1.00	1.00	0.99	0.8	1.00	1.00	1.00	0.9
		ΔT	23.91	24.22	22.07	18.6	23.72	24.03	22.02	18.6	23.15	23.45	22.28	18.8	22.16	22.47	22.01	18.5	20.96	21.27	21.77	18.3	19.87	20.18	20.83	19.4
		kW	2.55	2.55	2.54	2.6	2.86	2.86	2.85	2.9	3.20	3.20	3.19	3.2	3.57	3.57	3.56	3.6	3.98	3.98	3.97	4.0	4.47	4.46	4.46	4.5
		Amps	9.37	9.36	9.33	9.4	10.70	10.69	10.66	10.8	12.18	12.17	12.15	12.2	13.79	13.78	13.75	13.9	15.58	15.57	15.55	15.6	17.69	17.68	17.65	17.8
		Hi PR	266	267	268	272.9	306	307	309	313.1	348	349	351	355.2	393	394	396	400.6	442	443	445	449.5	494	495	497	501.7
		Lo PR	139	143	144	149.4	147	149	152	157.2	154	155	159	164.0	159	161	164	169.7	165	167	166	175.4	172	174	177	182.4

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

kW = Total system power

High and low pressures are measured at the liquid and suction access fittings.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

Heating Rating Table - Natural Gas and Propane

DHG	Phase	Gas Heat	Stage 1 Input/Output (MBH)	Stage 2 Input/Output (MBH)	Temp Rise High (ºF)	Temp Rise Low (ºF)	AFUE (%)	Thermal Efficiency (%)
DHG036	Single Phase	Low	45 / 36.45	33.75 / 27.38	15- 45	5- 35	81	--
		Medium	70 / 56.7	52.5 / 42.53	25- 55	15- 45	81	
		High	115 / 93.15	86.25 / 69.86	45- 75	35- 65	81	--
	3-Phase	Low	45 / 36.45	33.75 / 27.38	15- 45	5- 35	--	80
		Medium	70 / 56.7	52.5 / 42.53	25- 55	15-45	--	80
		High	115 / 93.15	86.25 / 69.86	45- 75	35- 65	--	80
DHG048	Single Phase	Low	70 / 56.7	52.5 / 42.53	25- 55	20- 50	81	--
		Medium	115 / 93.15	86.25 / 69.86	30- 60	20- 50	81	
		High	140 / 113.4	105 / 85.05	35- 65	25- 55	81	--
	3-Phase	Low	70 / 56.7	52.5 / 42.53	25- 55	20- 50	--	80
		Medium	115 / 93.15	86.25 / 69.86	30- 60	20- 50	--	80
		High	140 / 113.4	105 / 85.05	35- 65	25- 55	--	80
DHG060	Single Phase	Low	70 / 56.7	52.5 / 42.53	25- 55	15- 45	81	--
		Medium	115 / 93.15	86.25 / 69.86	35- 65	25- 55	81	
		High	140 / 113.4	105 / 85.05	35- 65	25- 55	81	--
	3-Phase	Low	70 / 56.7	52.5 / 42.53	25- 55	15- 45	--	80
		Medium	115 / 93.15	86.25 / 69.86	35- 65	35- 65	--	80
		High	140 / 113.4	105 / 85.05	35- 65	25- 55	--	80
DHG072	3-Phase	Low	70 / 56.7	52.5 / 42.53	25- 55	15- 45	--	80
		Medium	125 / 101.25	93.75 / 75.94	35- 65	25- 55	--	80
		High	150 / 121.5	112.5 / 91.13	35- 65	25- 55	--	80

Heat Exchanger and Burner Orifice Specifications

Unit	High Fire Rate Btu/Hr	Number of Burners	NG Orifice	LP Orifice
DHG036	45,000	2	43	55
	70,000	3	43	55
	115,000	6	45	56
DHG048	70,000	3	43	55
	115,000	5	43	55
	140,000	6	43	55
DHG060	70,000	3	43	55
	115,000	5	43	55
	140,000	6	43	55
DHG072	70,000	3	43	55
	125,000	5	41	54
	150,000	6	41	54

Heating Data

ULN Heating Rating Table

DHG	Phase	Gas Heat	Stage 1 Input/Output (MBH)	Stage 2 Input/Output (MBH)	Temp Rise High (ºF)	Temp Rise Low (ºF)	AFUE (%)	Thermal Efficiency (%)
DHG036	Single Phase	Low	60 / 48.6	NA	30- 60	NA	81	--
		Medium	80 / 64.8	NA	35- 65	NA	81	--
		High	100 / 81	NA	30- 60	NA	81	--
	3-Phase	Low	60 / 48.6	NA	30- 60	NA	--	80
		Medium	80 / 64.8	NA	35- 65	NA	--	80
		High	100 / 81	NA	30- 60	NA	--	80
DHG048	Single Phase	Low	80 / 64.8	NA	30- 60	NA	81	--
		Medium	100 / 81	NA	40- 70	NA	81	--
		High	80 / 64.8	NA	30- 60	NA	--	80
	3-Phase	Low	100 / 81	NA	40- 70	NA	--	80
		Medium	80 / 64.8	NA	30- 60	NA	81	--
		High	100 / 81	NA	35- 65	NA	81	--
DHG060	Single Phase	Low	80 / 64.8	NA	30- 60	NA	--	80
		Medium	100 / 81	NA	35- 65	NA	--	80
		High	140 / 113.4	105 / 85.05	35- 65	25- 55	81	--
	3-Phase	Low	70 / 56.7	52.5 / 42.53	25- 55	15- 45	--	80
		Medium	115 / 93.15	86.25 / 69.86	35- 65	35- 65	--	80
		High	140 / 113.4	105 / 85.05	35- 65	25- 55	--	80

ULN Heat Exchanger and Burner Orifice Specifications

Unit	High Fire Rate Btu/Hr	Number of Burners	NG Orifice
DHG036	60,000	3	24
	80,000	4	17
	100,000	5	11
DHG048	80,000	4	17
	100,000	5	11
DHG060	80,000	4	17
	100,000	5	11

Min-Max Airflow Range

Unit	High Fire Rate Btu/Hr	Heating Minimum Scfm	Cooling Minimum Scfm	COOLING MAXIMUM SCFM
DHG036	45,000	750	900	1500
	70,000	950		
	115,000	1150		
DHG048	70,000	950	1200	2000
	115,000	1325		
	140,000	1500		
DHG060	70,000	950	1500	2500
	115,000	1150		
	140,000	1615		
DHG072	70,000	950	1800	3000
	125,000	1565		
	150,000	1730		

3 - Ton Models: DHG0361D, DHG0363D
Standard Static Drive • Burners High Fire Input: 45,000 BTU/HR

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1000	600	0.15
	0.4	865	685	0.18
	0.6	730	750	0.19
	0.8	600	810	0.21
T2**	0.2	895	570	0.12
	0.4	755	655	0.14
	0.6	610	725	0.16
	0.8	470	780	0.17
T3	0.2	895	570	0.12
	0.4	755	655	0.14
	0.6	610	725	0.16
	0.8	470	780	0.17
T4	0.2	1225	670	0.24
	0.4	1110	745	0.27
	0.6	985	815	0.29
	0.8	880	870	0.31
T5	0.2	1425	730	0.33
	0.4	1325	795	0.36
	0.6	1210	865	0.39
	0.8	1115	920	0.42

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1050	580	0.15
	0.4	910	665	0.17
	0.6	765	730	0.19
	0.8	630	785	0.2
T2**	0.2	940	555	0.12
	0.4	795	635	0.14
	0.6	640	705	0.15
	0.8	495	755	0.16
T3	0.2	940	555	0.12
	0.4	795	635	0.14
	0.6	640	705	0.15
	0.8	495	755	0.16
T4	0.2	1285	650	0.23
	0.4	1165	725	0.26
	0.6	1035	790	0.28
	0.8	925	845	0.3
T5	0.2	1495	710	0.32
	0.4	1390	770	0.35
	0.6	1270	840	0.38
	0.8	1170	890	0.4

3 - Ton Models: DHG0361D, DHG0363D
Standard Static Drive • Burners High Fire Input: 70,000 BTU/HR

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1000	600	0.15
	0.4	865	685	0.18
	0.6	730	750	0.19
	0.8	600	810	0.21
T2**	0.2	895	570	0.12
	0.4	755	655	0.14
	0.6	610	725	0.16
	0.8	470	780	0.17
T3	0.2	895	570	0.12
	0.4	755	655	0.14
	0.6	610	725	0.16
	0.8	470	780	0.17
T4	0.2	1225	670	0.24
	0.4	1110	745	0.27
	0.6	985	815	0.29
	0.8	880	870	0.31
T5	0.2	1425	730	0.33
	0.4	1325	795	0.36
	0.6	1210	865	0.39
	0.8	1115	920	0.42

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1050	580	0.15
	0.4	910	665	0.17
	0.6	765	730	0.19
	0.8	630	785	0.2
T2**	0.2	940	555	0.12
	0.4	795	635	0.14
	0.6	640	705	0.15
	0.8	495	755	0.16
T3	0.2	940	555	0.12
	0.4	795	635	0.14
	0.6	640	705	0.15
	0.8	495	755	0.16
T4	0.2	1285	650	0.23
	0.4	1165	725	0.26
	0.6	1035	790	0.28
	0.8	925	845	0.3
T5	0.2	1495	710	0.32
	0.4	1390	770	0.35
	0.6	1270	840	0.38
	0.8	1170	890	0.4

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/ DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/ DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K,DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/ DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/ DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T2 VALUES ARE FOR PART LOAD ONLY

3 - Ton Models: DHG0361D, DHG0363D
Standard Static Drive • Burners High Fire Input: 115,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1000	600	0.15
	0.4	865	685	0.18
	0.6	730	750	0.19
	0.8	600	810	0.21
T2**	0.2	1090	630	0.19
	0.4	970	710	0.21
	0.6	835	775	0.23
	0.8	715	835	0.25
T3	0.2	1300	695	0.27
	0.4	1195	765	0.3
	0.6	1075	835	0.33
	0.8	970	890	0.35
T4	0.2	1225	670	0.24
	0.4	1110	745	0.27
	0.6	985	815	0.29
	0.8	880	870	0.31
T5	0.2	1900	850	0.61
	0.4	1800	910	0.65
	0.6	1695	970	0.69
	0.8	1595	1035	0.74

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1050	580	0.15
	0.4	910	665	0.17
	0.6	765	730	0.19
	0.8	630	785	0.2
T2**	0.2	1145	610	0.18
	0.4	1020	690	0.21
	0.6	875	750	0.22
	0.8	750	810	0.24
T3	0.2	1365	675	0.27
	0.4	1255	740	0.29
	0.6	1130	810	0.32
	0.8	1020	865	0.34
T4	0.2	1285	650	0.23
	0.4	1165	725	0.26
	0.6	1035	790	0.28
	0.8	925	845	0.3
T5	0.2	1995	825	0.59
	0.4	1890	885	0.63
	0.6	1780	940	0.67
	0.8	1675	1005	0.72

3 - Models: DHG0364D, DHG0367D
Standard Static Drive • Burners High Fire Input: 45,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	955	575	0.15
	0.4	825	660	0.17
	0.6	685	740	0.19
	0.8	555	805	0.21
T2**	0.2	1130	630	0.22
	0.4	1025	710	0.25
	0.6	900	785	0.27
	0.8	780	850	0.29
T3	0.2	1130	630	0.22
	0.4	1025	710	0.25
	0.6	900	785	0.27
	0.8	780	850	0.29
T4	0.2	1155	640	0.23
	0.4	1050	715	0.26
	0.6	925	790	0.28
	0.8	805	855	0.31
T5	0.2	1525	765	0.55
	0.4	1435	820	0.59
	0.6	1350	1205	0.62
	0.8	1250	940	0.67

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1010	540	0.14
	0.4	875	620	0.16
	0.6	725	695	0.18
	0.8	590	755	0.19
T2**	0.2	1200	590	0.2
	0.4	1085	665	0.23
	0.6	955	740	0.26
	0.8	825	800	0.28
T3	0.2	1200	590	0.2
	0.4	1085	665	0.23
	0.6	955	740	0.26
	0.8	825	800	0.28
T4	0.2	1225	600	0.21
	0.4	1115	670	0.24
	0.6	980	745	0.27
	0.8	855	805	0.29
T5	0.2	1615	720	0.51
	0.4	1520	770	0.55
	0.6	1430	825	0.59
	0.8	1325	885	0.63

* IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K,DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T2 VALUES ARE FOR PART LOAD ONLY

3 - Ton Models: DHG0364D, DHG0367D
Standard Static Drive • Burners High Fire Input: 70,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	955	575	0.15
	0.4	825	660	0.17
	0.6	685	740	0.19
	0.8	555	805	0.21
T2**	0.2	1215	660	0.26
	0.4	1115	730	0.29
	0.6	1000	805	0.32
	0.8	885	870	0.34
T3	0.2	1190	650	0.25
	0.4	1090	725	0.27
	0.6	970	800	0.3
	0.8	855	865	0.33
T4	0.2	1155	640	0.23
	0.4	1050	715	0.26
	0.6	925	790	0.28
	0.8	805	855	0.31
T5	0.2	1525	765	0.55
	0.4	1435	820	0.59
	0.6	1350	875	0.62
	0.8	1250	940	0.67

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1010	540	0.14
	0.4	875	620	0.16
	0.6	725	695	0.18
	0.8	590	755	0.19
T2**	0.2	1290	620	0.24
	0.4	1180	685	0.27
	0.6	1060	755	0.3
	0.8	940	820	0.32
T3	0.2	1260	610	0.23
	0.4	1155	680	0.26
	0.6	1030	750	0.28
	0.8	905	915	0.31
T4	0.2	1225	600	0.21
	0.4	1115	670	0.24
	0.6	980	745	0.27
	0.8	855	805	0.29
T5	0.2	1615	720	0.51
	0.4	1520	770	0.55
	0.6	1430	825	0.59
	0.8	1325	885	0.63

3 - Models: DHG0364D, DHG0367D
Standard Static Drive • Burners High Fire Input: 115,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	955	575	0.15
	0.4	825	660	0.17
	0.6	685	740	0.19
	0.8	555	805	0.21
T2**	0.2	1040	605	0.18
	0.4	920	685	0.2
	0.6	790	760	0.23
	0.8	665	825	0.25
T3	0.2	1215	660	0.26
	0.4	1115	730	0.29
	0.6	1000	805	0.32
	0.8	885	870	0.34
T4	0.2	1155	640	0.23
	0.4	1050	715	0.26
	0.6	925	790	0.28
	0.8	805	855	0.31
T5	0.2	1525	765	0.55
	0.4	1435	820	0.59
	0.6	1350	875	0.62
	0.8	1250	940	0.67

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1010	540	0.14
	0.4	875	620	0.16
	0.6	725	695	0.18
	0.8	590	755	0.19
T2**	0.2	1100	570	0.17
	0.4	975	645	0.19
	0.6	835	715	0.21
	0.8	705	775	0.23
T3	0.2	1290	620	0.24
	0.4	1180	685	0.27
	0.6	1060	755	0.3
	0.8	940	820	0.32
T4	0.2	1225	600	0.21
	0.4	1115	670	0.24
	0.6	980	745	0.27
	0.8	855	805	0.29
T5	0.2	1615	720	0.51
	0.4	1520	770	0.55
	0.6	1430	825	0.59
	0.8	1325	885	0.63

* IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/ DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/ DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K,DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/ DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/ DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T2 VALUES ARE FOR PART LOAD ONLY

4 - Models: DHG0481D, DHG0483D
Standard Static Drive • Burners High Fire Input: 70,000 BTU/HR

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	950	575	0.1
	0.4	780	660	0.12
	0.6	640	730	0.14
	0.8	515	800	0.16
T2**	0.2	1060	600	0.16
	0.4	920	685	0.18
	0.6	780	755	0.2
	0.8	655	825	0.22
T3	0.2	1165	635	0.2
	0.4	1040	710	0.22
	0.6	905	785	0.25
	0.8	785	850	0.27
T4	0.2	1510	740	0.36
	0.4	1410	800	0.39
	0.6	1305	870	0.42
	0.8	1195	925	0.45
T5	0.2	1805	840	0.56
	0.4	1715	890	0.59
	0.6	1630	940	0.63
	0.8	1550	990	0.66

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	975	555	0.15
	0.4	825	640	0.12
	0.6	680	730	0.19
	0.8	525	775	0.15
T2**	0.2	1115	580	0.15
	0.4	965	665	0.18
	0.6	820	730	0.19
	0.8	690	800	0.21
T3	0.2	1225	615	0.19
	0.4	1090	690	0.22
	0.6	950	760	0.24
	0.8	825	825	0.26
T4	0.2	1585	720	0.35
	0.4	1480	775	0.38
	0.6	1370	845	0.41
	0.8	1255	895	0.43
T5	0.2	1895	815	0.54
	0.4	1800	865	0.58
	0.6	1710	910	0.61
	0.8	1630	960	0.64

4 - Ton Models: DHG0481D, DHG0483D
Standard Static Drive • Burners High Fire Input: 115,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	755	515	0.04
	0.4	580	615	0.06
	0.6	430	690	0.08
	0.8	285	755	0.09
T2**	0.2	1405	715	0.31
	0.4	1305	775	0.33
	0.6	1190	840	1.36
	0.8	1075	905	0.39
T3	0.2	1785	845	0.55
	0.4	1700	890	0.58
	0.6	1620	945	0.62
	0.8	1525	995	0.65
T4	0.2	1515	750	0.36
	0.4	1420	805	0.39
	0.6	1315	870	0.42
	0.8	1205	930	0.45
T5	0.2	1820	855	0.58
	0.4	1730	900	0.61
	0.6	1655	955	0.65
	0.8	1560	1005	0.68

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	800	485	0.04
	0.4	610	580	0.06
	0.6	460	650	0.07
	0.8	300	710	0.09
T2**	0.2	1490	670	0.29
	0.4	1385	730	0.31
	0.6	1260	790	0.34
	0.8	1140	850	0.36
T3	0.2	1890	795	0.52
	0.4	1800	835	0.55
	0.6	1715	890	0.58
	0.8	1615	935	0.61
T4	0.2	1605	705	0.34
	0.4	1505	755	0.37
	0.6	1395	820	0.4
	0.8	1275	875	0.42
T5	0.2	1930	805	0.55
	0.4	1835	845	0.57
	0.6	1755	900	0.61
	0.8	1655	945	0.64

* IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K,DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T2 VALUES ARE FOR PART LOAD ONLY

4 - Models: DHG0481D, DHG0483D
Standard Static Drive • Burners High Fire Input: 140,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	930	570	0.12
	0.4	775	660	0.14
	0.6	635	730	0.16
	0.8	495	795	0.18
T2**	0.2	1145	630	0.19
	0.4	1015	710	0.22
	0.6	885	780	0.24
	0.8	755	845	0.26
T3	0.2	1930	900	0.7
	0.4	1830	940	0.73
	0.6	1770	990	0.77
	0.8	1680	1030	0.8
T4	0.2	1515	750	0.36
	0.4	1420	805	0.39
	0.6	1315	870	0.42
	0.8	1205	930	0.45
T5	0.2	1820	855	0.58
	0.4	1730	900	0.61
	0.6	1655	955	0.65
	0.8	1560	1005	0.68

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	980	540	0.11
	0.4	815	625	0.13
	0.6	675	685	0.15
	0.8	525	745	0.17
T2**	0.2	1215	590	0.18
	0.4	1075	665	0.21
	0.6	940	735	0.23
	0.8	800	795	0.25
T3	0.2	2045	845	0.65
	0.4	1940	885	0.68
	0.6	1875	930	0.72
	0.8	1780	970	0.75
T4	0.2	1605	705	0.34
	0.4	1505	755	0.37
	0.6	1395	820	0.4
	0.8	1275	875	0.42
T5	0.2	1930	805	0.55
	0.4	1835	845	0.57
	0.6	1755	900	0.61
	0.8	1655	945	0.64

4 - Ton Models: DHG0484D, DHG0487D
Standard Static Drive • Burners High Fire Input: 70,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	880	595	0.06
	0.4	735	680	0.08
	0.6	600	750	0.1
	0.8	465	815	0.21
T2**	0.2	1030	595	0.16
	0.4	885	680	0.18
	0.6	750	750	0.2
	0.8	615	815	0.21
T3	0.2	1155	635	0.2
	0.4	1030	710	0.22
	0.6	900	780	0.25
	0.8	770	845	0.27
T4	0.2	1515	750	0.36
	0.4	1420	805	0.39
	0.6	1315	870	0.42
	0.8	1205	930	0.45
T5	0.2	1820	855	0.58
	0.4	1730	900	0.61
	0.6	1655	955	0.65
	0.8	1560	1005	0.68

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	940	560	0.05
	0.4	740	640	0.07
	0.6	645	705	0.18
	0.8	500	765	0.2
T2**	0.2	1090	560	0.15
	0.4	940	640	0.17
	0.6	795	705	0.18
	0.8	650	765	0.2
T3	0.2	1225	595	0.19
	0.4	1090	665	0.21
	0.6	955	735	0.23
	0.8	815	795	0.25
T4	0.2	1605	705	0.34
	0.4	1505	755	0.37
	0.6	1395	820	0.4
	0.8	1275	875	0.42
T5	0.2	1930	805	0.55
	0.4	1835	845	0.57
	0.6	1755	900	0.61
	0.8	1655	945	0.64

* IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K,DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T2 VALUES ARE FOR PART LOAD ONLY

4 - Models: DHG0484D, DHG0487D
Standard Static Drive • Burners High Fire Input: 115,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	920	565	0.11
	0.4	760	655	0.13
	0.6	620	730	0.15
	0.8	480	795	0.16
T2**	0.2	1405	715	0.31
	0.4	1305	775	0.33
	0.6	1190	840	0.36
	0.8	1075	905	0.39
T3	0.2	1785	845	0.55
	0.4	1700	890	0.58
	0.6	1620	945	0.62
	0.8	1525	995	0.65
T4	0.2	1515	750	0.36
	0.4	1420	805	0.39
	0.6	1315	870	0.42
	0.8	1205	930	0.45
T5	0.2	1820	855	0.58
	0.4	1730	900	0.61
	0.6	1655	955	0.65
	0.8	1560	1005	0.68

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	970	535	0.1
	0.4	805	620	0.12
	0.6	660	685	0.14
	0.8	510	745	0.16
T2**	0.2	1490	670	0.29
	0.4	1385	730	0.31
	0.6	1260	790	0.34
	0.8	1140	850	0.36
T3	0.2	1890	795	0.52
	0.4	1800	835	0.55
	0.6	1715	890	0.58
	0.8	1615	935	0.61
T4	0.2	1605	705	0.34
	0.4	1505	755	0.37
	0.6	1395	820	0.4
	0.8	1275	875	0.42
T5	0.2	1930	805	0.55
	0.4	1835	845	0.57
	0.6	1755	900	0.61
	0.8	1655	945	0.64

4 - Ton Models: DHG0484D, DHG0487D
Standard Static Drive • Burners High Fire Input: 140,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	910	565	0.12
	0.4	750	655	0.13
	0.6	610	725	0.15
	0.8	475	790	0.17
T2**	0.2	1145	630	0.19
	0.4	1015	710	0.22
	0.6	885	780	0.24
	0.8	755	845	0.26
T3	0.2	1930	900	0.7
	0.4	1830	940	0.73
	0.6	1770	990	0.77
	0.8	1680	1030	0.8
T4	0.2	1515	750	0.36
	0.4	1420	805	0.39
	0.6	1315	870	0.42
	0.8	1205	930	0.45
T5	0.2	1820	855	0.58
	0.4	1730	900	0.61
	0.6	1655	955	0.65
	0.8	1560	1005	0.68

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	960	535	0.11
	0.4	795	620	0.12
	0.6	650	680	0.14
	0.8	500	740	0.16
T2**	0.2	1215	590	0.18
	0.4	1075	665	0.21
	0.6	940	735	0.23
	0.8	800	795	0.25
T3	0.2	2045	845	0.65
	0.4	1940	885	0.68
	0.6	1875	930	0.72
	0.8	1780	970	0.75
T4	0.2	1605	705	0.34
	0.4	1505	755	0.37
	0.6	1395	820	0.4
	0.8	1275	875	0.42
T5	0.2	1930	845	0.55
	0.4	1835	845	0.57
	0.6	1755	900	0.61
	0.8	1655	945	0.64

* IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K,DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T2 VALUES ARE FOR PART LOAD ONLY

5 - Models: DHG0601D, DHG0603D
Standard Static Drive • Burners High Fire Input: 70,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1100	620	0.21
	0.4	975	700	0.18
	0.6	845	770	0.26
	0.8	730	865	0.23
T2**	0.2	1200	645	0.21
	0.4	1075	725	0.23
	0.6	945	795	0.26
	0.8	830	865	0.28
T3	0.2	1200	645	0.21
	0.4	1075	725	0.23
	0.6	945	795	0.26
	0.8	830	865	0.28
T4	0.2	1895	865	0.62
	0.4	1810	920	0.66
	0.6	1720	965	0.69
	0.8	1640	1020	0.73
T5	0.2	2145	955	0.91
	0.4	2065	990	0.94
	0.6	1980	1035	0.99
	0.8	1900	1075	1.02

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1160	600	0.15
	0.4	1030	680	0.23
	0.6	865	745	0.2
	0.8	745	840	0.22
T2**	0.2	1260	625	0.2
	0.4	1130	705	0.23
	0.6	990	770	0.25
	0.8	870	840	0.27
T3	0.2	1260	625	0.2
	0.4	1130	705	0.23
	0.6	990	770	0.25
	0.8	870	840	0.27
T4	0.2	1990	840	0.6
	0.4	1900	890	0.64
	0.6	1805	935	0.67
	0.8	1720	990	0.71
T5	0.2	2250	925	0.88
	0.4	2170	960	0.91
	0.6	2080	1005	0.96
	0.8	1995	1045	0.99

5 - Ton Models: DHG0601D, DHG0603D
Standard Static Drive • Burners High Fire Input: 115,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1105	620	0.18
	0.4	980	700	0.21
	0.6	835	785	0.23
	0.8	720	850	0.23
T2**	0.2	1185	640	0.2
	0.4	1060	720	0.23
	0.6	925	795	0.25
	0.8	810	860	0.27
T3	0.2	1665	790	0.44
	0.4	1565	850	0.48
	0.6	1465	910	0.51
	0.8	1375	965	0.54
T4	0.2	1895	865	0.62
	0.4	1810	920	0.66
	0.6	1720	965	0.69
	0.8	1640	1020	0.73
T5	0.2	2145	955	0.91
	0.4	2065	990	0.94
	0.6	1980	1035	0.99
	0.8	1900	1075	1.02

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1165	600	0.15
	0.4	1035	680	0.2
	0.6	870	760	0.2
	0.8	750	825	0.22
T2**	0.2	1245	620	0.19
	0.4	1115	700	0.22
	0.6	970	770	0.24
	0.8	850	835	0.26
T3	0.2	1750	765	0.43
	0.4	1645	825	0.46
	0.6	1540	885	0.49
	0.8	1445	935	0.52
T4	0.2	1990	840	0.6
	0.4	1900	890	0.64
	0.6	1805	935	0.67
	0.8	1720	990	0.71
T5	0.2	2250	924	0.88
	0.4	2170	960	0.91
	0.6	2080	1005	..96
	0.8	1995	1045	0.99

* IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/ DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/ DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K,DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/ DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/ DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T2 VALUES ARE FOR PART LOAD ONLY

5 - Models: DHG0601D, DHG0603D
Standard Static Drive • Burners High Fire Input: 140,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1135	620	0.16
	0.4	1000	775	0.19
	0.6	865	780	0.2
	0.8	750	845	0.23
T2**	0.2	1910	870	0.63
	0.4	1825	925	0.67
	0.6	1735	970	0.7
	0.8	1655	1020	0.74
T3	0.2	1910	870	0.63
	0.4	1825	925	0.67
	0.6	1735	970	0.7
	0.8	1655	1020	0.74
T4	0.2	1895	865	0.62
	0.4	1810	920	0.66
	0.6	1720	965	0.69
	0.8	1640	1020	0.73
T5	0.2	2145	955	0.91
	0.4	2065	990	0.94
	0.6	1980	1035	0.99
	0.8	1900	1075	1.02

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1190	605	0.16
	0.4	1055	685	0.18
	0.6	915	755	0.21
	0.8	790	820	0.22
T2**	0.2	2005	845	0.61
	0.4	1915	895	0.65
	0.6	1820	940	0.68
	0.8	1740	990	0.72
T3	0.2	2005	845	0.61
	0.4	1915	895	0.65
	0.6	11820	940	0.68
	0.8	1740	990	0.72
T4	0.2	1990	840	0.6
	0.4	1900	890	0.64
	0.6	1805	935	0.67
	0.8	1720	990	0.71
T5	0.2	2250	925	0.88
	0.4	2170	960	0.91
	0.6	2080	1005	0.96
	0.8	1995	1045	0.99

5 - Ton Models: DHG0604D, DHG0607D
Standard Static Drive • Burners High Fire Input: 70,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1120	625	0.16
	0.4	995	675	0.18
	0.6	845	775	0.21
	0.8	745	835	0.23
T2**	0.2	1300	675	0.24
	0.4	1185	750	0.27
	0.6	1065	820	0.29
	0.8	940	880	0.31
T3	0.2	1220	650	0.21
	0.4	1095	725	0.23
	0.6	970	800	0.26
	0.8	845	860	0.28
T4	0.2	1930	890	0.64
	0.4	1850	935	0.67
	0.6	1770	985	0.7
	0.8	1685	1030	0.74
T5	0.2	2165	960	0.94
	0.4	2085	1000	0.95
	0.6	2005	1035	0.99
	0.8	1935	1080	1.03

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1195	585	0.2
	0.4	1060	630	0.17
	0.6	905	725	0.19
	0.8	795	785	0.21
T2**	0.2	1380	635	0.23
	0.4	1255	705	0.25
	0.6	1130	770	0.27
	0.8	995	825	0.29
T3	0.2	1295	610	0.2
	0.4	1160	680	0.22
	0.6	1030	750	0.24
	0.8	895	810	0.26
T4	0.2	2045	835	0.6
	0.4	1960	880	0.63
	0.6	1875	925	0.66
	0.8	1785	970	0.69
T5	0.2	2295	900	0.86
	0.4	221	940	0.89
	0.6	2125	975	0.93
	0.8	2050	1015	0.97

* IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K,DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T2 VALUES ARE FOR PART LOAD ONLY

5 - Models: DHG0604D, DHG0607D
Standard Static Drive • Burners High Fire Input: 115,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1130	620	0.18
	0.4	985	710	0.19
	0.6	865	780	0.23
	0.8	730	840	0.25
T2**	0.2	1300	675	0.24
	0.4	1185	750	0.27
	0.6	1065	820	0.29
	0.8	940	880	0.31
T3	0.2	1695	815	0.46
	0.4	1605	865	0.48
	0.6	1515	925	0.52
	0.8	1414	980	0.55
T4	0.2	1930	890	0.56
	0.4	1850	935	0.67
	0.6	1770	985	0.7
	0.8	1685	1030	0.74
T5	0.2	2165	960	0.91
	0.4	2085	1000	0.95
	0.6	2005	1035	0.99
	0.8	1935	1080	1.03

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1195	580	0.15
	0.4	1045	665	0.19
	0.6	920	730	0.21
	0.8	770	795	0.23
T2**	0.2	1380	635	0.23
	0.4	1255	705	0.25
	0.6	1130	770	0.27
	0.8	995	825	0.29
T3	0.2	1795	765	0.43
	0.4	1700	815	0.46
	0.6	1605	870	0.49
	0.8	1500	920	0.51
T4	0.2	2045	835	0.6
	0.4	1960	880	0.63
	0.6	1875	925	0.66
	0.8	1785	970	0.69
T5	0.2	2295	900	0.86
	0.4	2210	940	0.89
	0.6	2125	975	0.93
	0.8	2050	1015	0.97

5 - Ton Models: DHG0604D, DHG0607D
Standard Static Drive • Burners High Fire Input: 140,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1145	620	0.17
	0.4	1015	705	0.19
	0.6	885	780	0.21
	0.8	750	840	0.23
T2**	0.2	1790	845	0.52
	0.4	1705	895	0.55
	0.6	1625	950	0.59
	0.8	1530	1000	0.62
T3	0.2	1940	895	0.65
	0.4	1865	940	0.68
	0.6	1785	990	0.72
	0.8	1700	1035	0.75
T4	0.2	1930	890	0.64
	0.4	1850	935	0.67
	0.6	1770	985	0.7
	0.8	1685	1030	0.74
T5	0.2	2165	960	0.91
	0.4	2085	1000	0.95
	0.6	2005	1035	0.99
	0.8	1935	1080	1.03

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1215	585	0.15
	0.4	1070	665	0.19
	0.6	940	730	0.2
	0.8	795	795	0.22
T2**	0.2	1895	795	0.49
	0.4	1805	840	0.52
	0.6	1725	895	0.55
	0.8	1620	940	0.58
T3	0.2	2055	840	0.61
	0.4	1975	885	0.64
	0.6	1890	930	0.68
	0.8	1800	975	0.71
T4	0.2	2045	835	0.6
	0.4	1960	880	0.63
	0.6	1875	925	0.66
	0.8	1785	970	0.69
T5	0.2	2295	900	0.86
	0.4	2210	940	0.89
	0.6	2125	975	0.93
	0.8	2050	1015	0.97

* IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K,DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T2 VALUES ARE FOR PART LOAD ONLY

6 - Ton Models: DHG0723D, DHG0724D, DHG0607D
Standard Static Drive • Burners High Fire Input: 70,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1342	623	0.22
	0.4	1212	685	0.25
	0.6	1083	773	0.28
	0.8	948	843	0.3
T2**	0.2	1342	623	0.22
	0.4	1212	695	0.25
	0.6	1083	773	0.28
	0.8	948	843	0.3
T3	0.2	1994	811	0.56
	0.4	1890	862	0.59
	0.6	1791	913	0.63
	0.8	1693	965	0.67
T4	0.2	2030	825	0.59
	0.4	1930	875	0.62
	0.6	1830	925	0.66
	0.8	1735	975	0.7
T5	0.2	2370	931	0.89
	0.4	2297	975	0.93
	0.6	2204	1020	0.97
	0.8	2119	1060	1.01

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1369	662	0.24
	0.4	1237	738	0.26
	0.6	1105	821	0.29
	0.8	967	895	0.32
T2**	0.2	1369	662	0.24
	0.4	1237	738	0.26
	0.6	1105	821	0.29
	0.8	967	895	0.32
T3	0.2	2035	861	0.59
	0.4	1929	916	0.63
	0.6	1828	970	0.67
	0.8	1727	1025	0.71
T4	0.2	2075	875	0.62
	0.4	1970	930	0.66
	0.6	1870	980	0.7
	0.8	1770	1035	0.74
T5	0.2	2419	990	0.94
	0.4	2344	1036	0.99
	0.6	2249	1083	1.03
	0.8	2162	1126	1.07

6 - Models: DHG0723D, DHG0724D, DHG0607D
Standard Static Drive • Burners High Fire Input: 125,000 & 150,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1340	625	0.22
	0.4	1210	695	0.25
	0.6	1085	775	0.28
	0.8	950	845	0.3
T2**	0.2	2216	882	0.73
	0.4	2135	929	0.77
	0.6	2037	975	0.81
	0.8	1944	1020	0.85
T3	0.2	2216	882	0.73
	0.4	2135	929	0.77
	0.6	2037	975	0.81
	0.8	1944	1020	0.85
T4	0.2	2293	907	0.81
	0.4	2216	952	0.85
	0.6	2121	997	0.89
	0.8	2032	1040	0.91
T5	0.2	2370	931	0.89
	0.4	2297	975	0.93
	0.6	2204	1020	0.97
	0.8	2119	1060	1.01

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1370	660	0.24
	0.4	1235	740	0.26
	0.6	1105	820	0.29
	0.8	965	895	0.32
T2**	0.2	2261	937	0.78
	0.4	2179	987	0.82
	0.6	2079	1036	0.86
	0.8	1984	1084	0.9
T3	0.2	2261	937	0.78
	0.4	2179	987	0.82
	0.6	2079	1036	0.86
	0.8	1984	1084	0.9
T4	0.2	2340	963	0.86
	0.4	2262	1011	0.9
	0.6	2164	1059	0.95
	0.8	2073	1105	0.99
T5	0.2	2419	990	0.94
	0.4	2344	1036	0.99
	0.6	2249	1083	1.03
	0.8	2162	1126	1.07

* IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K, DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/ DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/ DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0361D/DHG0363D/DHG0364D/DHG0367D 45K,DHG0361D/DHG0363D/DHG0364D/DHG0367D 70K, DHG0361D/DHG0363D/ DHG0364D/DHG0367D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 70K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 115K, DHG0481D/DHG0483D/DHG0484D/DHG0487D 140K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 70K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 115K, DHG0601D/DHG0603D/ DHG0604D/DHG0607D 140K, DHG0723D/DHG0724D/DHG0727D 70K, DHG0723D/ DHG0724D/DHG0727D 125K, AND DHG0723D/DHG0724D/DHG0727D 150K DOWNSHOT & HORIZONTAL TABLES, T2 VALUES ARE FOR PART LOAD ONLY

3 Ton - High-Static Drive Models: DHG0363, DHG0364, DHG0367W
45,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1C*	0.8	495	779	0.17	T1'H*	0.8	848	836	0.22
	1	385	843	0.18		1	735	897	0.23
	1.2					1.2	608	949	0.25
	1.4					1.4	515	1002	0.26
	1.6					1.6	400	1042	0.27
	1.8					1.8			
	2					2			
T2C**	0.8	848	836	0.22	T2'H**	0.8	1119	881	0.35
	1	735	897	23		1	1018	938	0.37
	1.2	608	949	0.25		1.2	910	996	0.39
	1.4	515	1002	0.26		1.4	813	1045	0.41
	1.6	400	1042	0.27		1.6	704	1093	0.43
	1.8					1.8	616	1140	0.45
	2					2	521	1178	0.46
T3C	0.8	1397	934	0.58	T3'H	0.8	1289	917	0.52
	1	1287	998	0.62		1	1179	978	0.56
	1.2	1195	1047	0.65		1.2	1089	1027	0.59
	1.4	1108	1093	0.68		1.4	996	1086	0.62
	1.6	1023	1147	0.71		1.6	913	1129	0.64
	1.8	940	1190	0.74		1.8	820	1174	0.67
	2	841	1233	0.76		2	722	1214	0.69
T4C	0.8	1559	973	0.82	T4'H	0.8	1397	934	0.58
	1	1473	1021	0.85		1	1287	998	0.62
	1.2	1365	1079	0.9		1.2	1195	1047	0.65
	1.4	1277	1125	0.94		1.4	1108	1093	0.68
	1.6	1195	1168	0.97		1.6	1023	1147	0.71
	1.8	1113	1221	1.02		1.8	940	1190	0.74
	2	1044	1263	1.05		2	841	1233	0.76
T5C	0.8				T5'H	0.8			
	1	1550	1055	1.01		1	1550	1055	1.01
	1.2	1468	1100	1.05		1.2	1468	1100	1.05
	1.4	1378	1148	1.09		1.4	1378	1148	1.09
	1.6	198	1191	1.13		1.6	198	1191	1.13
	1.8	1219	1232	1.17		1.8	1219	1232	1.17
	2	1139	1280	1.22		2	1139	1280	1.22

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1C*	0.8	505	828	0.18	T1'H*	0.8	865	889	0.23
	1	392	897	0.19		1	750	954	0.25
	1.2					1.2	620	1010	0.26
	1.4					1.4	526	1066	0.28
	1.6					1.6	408	1109	0.29
	1.8					1.8			
	2					2			
T2C**	0.8	865	889	0.23	T2'H**	0.8	1372	976	0.56
	1	750	954	0.25		1	1254	1041	0.59
	1.2	620	1010	0.26		1.2	1159	1092	0.62
	1.4	526	1066	0.28		1.4	1060	1155	0.66
	1.6					1.6	972	1201	0.69
	1.8					1.8	872	1249	0.71
	2					2	768	1291	0.74
T3C	0.8	1487	993	0.61	T3'H	0.8	1142	937	0.37
	1	1369	1062	0.66		1	1039	998	0.39
	1.2	1271	1114	0.69		1.2	929	1060	0.42
	1.4	1179	1163	0.72		1.4	829	1112	0.44
	1.6	1088	1220	0.76		1.6	718	1163	0.46
	1.8	1000	1266	0.78		1.8	628	1213	0.48
	2	895	1312	0.81		2	532	1253	0.49
T4C	0.8	1622	1050	0.88	T4'H	0.8	1487	993	0.61
	1	1537	1099	0.92		1	1369	1062	0.66
	1.2	1452	1148	0.96		1.2	1271	1114	0.69
	1.4	1359	1197	1		1.4	1179	1163	0.72
	1.6	1272	1243	1.04		1.6	1088	1220	0.76
	1.8	1184	1299	1.08		1.8	1000	1266	0.78
	2	1111	1344	1.12		2	895	1312	0.81
T5C	0.8				T5'H	0.8			
	1					1			
	1.2	1550	1176	1.12		1.2	1550	1176	1.12
	1.4	1466	1222	1.16		1.4	1466	1222	1.16
	1.6	1380	1267	1.21		1.6	1380	1267	1.21
	1.8	1297	1310	1.25		1.8	1297	1310	1.25
	2	1212	1361	1.3		2	1212	1361	1.3

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

3 Ton - High-Static Drive Models: DHG0363, DHG0364, DHG0367W
70,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1C*	0.8	495	779	0.17	T1'H*	0.8	848	836	0.22
	1	385	843	0.18		1	735	897	0.23
	1.2					1.2	608	949	0.25
	1.4					1.4	515	1002	0.26
	1.6					1.6	400	1042	0.27
	1.8					1.8			
	2					2			
T2C**	0.8	848	836	0.22	T2'H**	0.8	1397	934	0.58
	1	735	897	0.23		1	1287	998	0.62
	1.2	608	949	0.25		1.2	1195	1047	0.65
	1.4	515	1002	0.26		1.4	1108	1093	0.68
	1.6	400	1042	0.27		1.6	1023	1147	0.71
	1.8					1.8	940	1190	0.74
	2					2	841	1233	0.76
T3C	0.8	1397	934	0.58	T3'H	0.8	1223	901	0.56
	1	1287	998	0.62		1	1119	957	0.59
	1.2	1195	1047	0.65		1.2	1028	1010	0.63
	1.4	1108	1093	0.68		1.4	925	1064	0.66
	1.6	1023	1147	0.71		1.6	832	1110	0.69
	1.8	940	1190	0.74		1.8	722	1155	0.71
	2	841	1233	0.76		2	647	1200	0.74
T4C	0.8	1559	973	0.82	T4'H	0.8	1486	950	0.42
	1	1473	1021	0.85		1	1376	1012	0.45
	1.2	1365	1079	0.9		1.2	1280	1066	0.47
	1.4	1277	1125	0.94		1.4	1198	1112	0.49
	1.6	1195	1168	0.97		1.6	1113	158	0.51
	1.8	1113	1221	1.02		1.8	1031	1205	0.53
	2	1044	1263	1.05		2	947	1244	0.55
T5C	0.8	1632	1010	0.96	T5'H	0.8	1632	1010	0.96
	1	1550	1055	1.01		1	1550	1055	1.01
	1.2	1468	1100	1.05		1.2	1468	1100	1.05
	1.4	1378	1148	1.09		1.4	1378	1148	1.09
	1.6	1298	1191	1.13		1.6	1298	1191	1.13
	1.8	1219	1232	1.17		1.8	1219	1232	1.17
	2	1139	1280	1.22		2	1139	1280	1.22

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1C*	0.8	990	909	0.27	T1'H*	0.8	865	889	0.23
	1	876	978	0.29		1	750	954	0.25
	1.2	774	1033	0.31		1.2	620	1010	0.26
	1.4	647	1087	0.32		1.4	526	1066	0.28
	1.6	562	1140	0.34		1.6	408	1109	0.29
	1.8	460	1182	0.35		1.8			
	2					2			
T2C**	0.8	1372	976	0.56	T2'H**	0.8	1487	993	0.61
	1	1254	1041	0.59		1	1369	1062	0.66
	1.2	1159	1092	0.62		1.2	1271	1114	0.69
	1.4	1060	1155	0.66		1.4	1179	1163	0.72
	1.6	972	1201	0.69		1.6	1088	1220	0.76
	1.8	872	1249	0.71		1.8	1000	1266	0.78
	2	768	1291	0.74		2	895	1312	0.81
T3C	0.8	1487	993	0.61	T3'H	0.8	1248	958	0.59
	1	1369	1062	0.66		1	1142	1019	0.63
	1.2	1271	1114	0.69		1.2	1049	1075	0.67
	1.4	1179	1163	0.72		1.4	944	1132	0.7
	1.6	1088	1220	0.76		1.6	849	1181	0.73
	1.8	1000	1266	0.78		1.8	737	1229	0.76
	2	895	1312	0.81		2	660	1277	0.79
T4C	0.8	1622	1050	0.88	T4'H	0.8	1373	1028	0.45
	1	1537	1099	0.92		1	1464	1077	0.47
	1.2	1452	1148	0.96		1.2	1362	1134	0.5
	1.4	1359	1197	1		1.4	1275	1183	0.52
	1.6	1272	1243	1.04		1.6	1184	1232	0.54
	1.8	1184	1299	1.08		1.8	1096	1282	0.56
	2	1111	1344	1.12		2	1007	1323	0.58
T5C	0.8				T5'H	0.8			
	1	1635	1129	1.07		1	1635	1129	1.07
	1.2	1550	1176	1.12		1.2	1550	1176	1.12
	1.4	1466	1222	1.16		1.4	1466	1222	1.16
	1.6	1380	1267	1.21		1.6	1380	1267	1.21
	1.8	1297	1310	1.25		1.8	1297	1310	1.25
	2	1212	1361	1.3		2	1212	1361	1.3

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

3 Ton - High-Static Drive Models: DHG0363, DHG0364, DHG0367W
115,000 BTU

Down Flow

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP	SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
	0.8	495	779	0.17		0.8	1223	901	0.56
	1	385	843	0.18		1	1119	957	0.59
	1.2					1.2	1028	1010	0.63
T1C*	1.4				T1'H*	1.4	925	1064	0.66
	1.6					1.6	832	1110	0.69
	1.8					1.8	722	1155	0.71
	2					2	647	1200	0.74
	0.8	848	836	0.22		0.8	1397	934	0.58
	1	735	897	0.23		1	1287	998	0.62
	1.2	608	949	0.25		1.2	1195	1047	0.65
T2C**	1.4	515	1002	0.26	T2'H**	1.4	1108	1093	0.68
	1.6	400	1042	0.27		1.6	1023	1147	0.71
	1.8					1.8	940	1190	0.74
	2					2	841	1233	0.76
	0.8	1397	934	0.58		0.8	1486	950	0.68
	1	1287	998	0.62		1	1376	1012	0.72
	1.2	1195	1047	0.65		1.2	1280	1066	0.76
T3C	1.4	1108	1093	0.68	T3'H	1.4	1198	1112	0.79
	1.6	1023	1147	0.71		1.6	1113	1158	0.83
	1.8	940	1190	0.74		1.8	1031	1205	0.86
	2	841	1233	0.76		2	947	1244	0.89
	0.8	1559	973	0.82		0.8	1559	973	0.82
	1	1473	1021	0.85		1	1473	1021	0.85
	1.2	1365	1079	0.9		1.2	1365	1079	0.9
T4C	1.4	1277	1125	0.94	T4'H	1.4	1277	1125	0.94
	1.6	1195	1168	0.97		1.6	1195	1168	0.97
	1.8	1113	1221	1.02		1.8	1113	1221	1.02
	2	1044	1263	1.05		2	1044	1263	1.05
	0.8	1632	1010	0.96		0.8	1632	1010	0.96
	1	1550	1055	1.01		1	1550	1055	1.01
	1.2	1468	1100	1.05		1.2	1468	1100	1.05
T5C	1.4	1378	1148	1.09	T5'H	1.4	1378	1148	1.09
	1.6	1298	1191	1.13		1.6	1298	1191	1.13
	1.8	1219	1232	1.17		1.8	1219	1232	1.17
	2	1139	1280	1.22		2	1139	1280	1.22

Horizontal

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP	SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
	0.8	505	828	0.18		0.8	1248	958	0.59
	1	392	897	0.19		1	1142	1019	0.63
	1.2					1.2	1049	1075	0.67
T1C*	1.4				T1'H*	1.4	944	1132	0.7
	1.6					1.6	849	1181	0.73
	1.8					1.8	737	1229	0.76
	2					2	660	1277	0.79
	0.8	865	889	0.23		0.8	1487	993	0.61
	1	750	954	0.25		1	1369	1062	0.66
	1.2	620	1010	0.26		1.2	1271	1114	0.69
T2C**	1.4	526	1066	0.28	T2'H**	1.4	1179	1163	0.72
	1.6	408	1109	0.29		1.6	1088	1220	0.76
	1.8					1.8	1000	1266	0.78
	2					2	895	1312	0.81
	0.8	1487	993	0.61		0.8			
	1	1369	1062	0.66		1	1464	1077	0.77
	1.2	1271	1114	0.69		1.2	1362	1134	0.81
T3C	1.4	1179	1163	0.72	T3'H	1.4	1275	1183	0.84
	1.6	1088	1220	0.76		1.6	1184	1232	0.88
	1.8	1000	1266	0.78		1.8	1096	1282	0.92
	2	895	1312	0.81		2	1007	1323	0.94
	0.8	1622	1050	0.88		0.8	1622	1050	0.88
	1	1537	1099	0.92		1	1537	1099	0.92
	1.2	1452	1148	0.96		1.2	1452	1148	0.96
T4C	1.4	1359	1197	1	T4'H	1.4	1359	1197	1
	1.6	1272	1243	1.04		1.6	1272	1243	1.04
	1.8	1184	1299	1.08		1.8	1184	1299	1.08
	2	1111	1344	1.12		2	1111	1344	1.12
	0.8					0.8			
	1	1635	1129	1.07		1	1635	1129	1.07
	1.2	1550	1176	1.12		1.2	1550	1176	1.12
T5C	1.4	1466	1222	1.16	T5'H	1.4	1466	1222	1.16
	1.6	1380	1267	1.21		1.6	1380	1267	1.21
	1.8	1297	1310	1.25		1.8	1297	1310	1.25
	2	1212	1361	1.3		2	1212	1361	1.3

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

4 Ton - High-Static Drive Models: DHG0483, DHG0484, DHG0487W
70,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP
T1C*	0.8	1092	875	0.37
	1	1007	927	0.4
	1.2	880	991	0.42
	1.4	789	1042	0.45
	1.6	692	1090	0.47
	1.8	612	1134	0.49
	2	509	1191	0.52
T2C**	0.8	1510	928	0.56
	1	1369	995	0.6
	1.2	1285	1040	0.63
	1.4	1202	1085	0.66
	1.6	1130	1133	0.69
	1.8	1044	1178	0.71
	2	918	1233	0.75
T3C	0.8	1782	993	0.77
	1	1711	1034	0.8
	1.2	1576	1102	0.85
	1.4	1494	1143	0.88
	1.6	1419	1183	0.91
	1.8	1349	1225	0.95
	2	1282	1266	0.98
T4C	0.8	1921	1026	0.89
	1	1848	1066	0.91
	1.2	1742	1123	0.98
	1.4	1640	1174	1.02
	1.6	1580	1214	1.05
	1.8	1504	1251	1.09
	2	1440	1289	1.12
T5C	0.8	2064	1053	1
	1	1978	1096	1.04
	1.2	1909	1136	1.08
	1.4	1786	1196	1.14
	1.6	1698	1239	1.18
	1.8	1622	1277	1.22
	2	1550	1311	1.25

SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1'H*	0.8	1015	856	0.34
	1	924	914	0.36
	1.2	791	978	0.38
	1.4	700	1028	0.4
	1.6	600	1079	0.42
	1.8	492	1139	0.44
	2			
T2'H**	0.8	1092	875	0.37
	1	1007	927	0.4
	1.2	880	991	0.42
	1.4	789	1042	0.45
	1.6	692	1090	0.47
	1.8	612	1134	0.49
	2	509	1191	0.52
T3'H	0.8	1250	905	0.45
	1	1160	953	0.48
	1.2	1081	1001	0.5
	1.4	1000	1045	0.52
	1.6	909	1099	0.55
	1.8	783	1153	0.58
	2	686	1199	0.6
T4'H	0.8	1782	993	0.77
	1	1711	1034	0.8
	1.2	1576	1102	0.85
	1.4	1494	1143	0.88
	1.6	1419	1183	0.91
	1.8	1349	1225	0.95
	2	1282	1266	0.98
T5'H	0.8	2064	1053	1
	1	1978	1096	1.04
	1.2	1909	1136	1.08
	1.4	1786	1196	1.14
	1.6	1698	1239	1.18
	1.8	1622	1277	1.22
	2	1550	1311	1.25

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP
T1C*	0.8	1114	931	0.4
	1	1028	986	0.42
	1.2	898	1054	0.45
	1.4	805	1109	0.48
	1.6	706	1160	0.5
	1.8	624	1206	0.52
	2	519	1266	0.55
T2C**	0.8	1541	987	0.6
	1	1397	1058	0.64
	1.2	1311	1106	0.67
	1.4	1227	1154	0.7
	1.6	1153	1205	0.73
	1.8	1065	1253	0.76
	2	937	1312	0.8
T3C	0.8	1818	1056	0.82
	1	1746	1100	0.85
	1.2	1608	1172	0.91
	1.4	1524	1216	0.94
	1.6	1448	1258	0.97
	1.8	1377	1303	1.01
	2	1308	1347	1.04
T4C	0.8	1960	1092	0.95
	1	1886	1134	0.99
	1.2	1778	1195	1.04
	1.4	1673	1249	1.09
	1.6	1612	1291	1.12
	1.8	1535	1331	1.16
	2	1469	1371	1.19
T5C	0.8	2131	1115	1.06
	1	2040	1161	1.1
	1.2	1948	1208	1.15
	1.4	1822	1272	1.21
	1.6	1733	1318	1.25
	1.8	1655	1358	1.29
	2	1582	1395	1.33

SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1'H*	0.8	1036	911	0.36
	1	943	972	0.38
	1.2	807	1040	0.41
	1.4	714	1094	0.43
	1.6	612	1148	0.45
	1.8	502	1212	0.47
	2			
T2'H**	0.8	1114	931	0.4
	1	1028	986	0.42
	1.2	898	1054	0.45
	1.4	805	1109	0.48
	1.6	706	1160	0.5
	1.8	624	1206	0.52
	2	519	1266	0.55
T3'H	0.8	1276	963	0.48
	1	1184	1014	0.51
	1.2	1103	1065	0.53
	1.4	1020	1112	0.56
	1.6	928	1169	0.58
	1.8	799	1227	0.61
	2	700	1276	0.64
T4'H	0.8	1818	1056	0.82
	1	1746	1100	0.85
	1.2	1608	1172	0.91
	1.4	1524	1216	0.94
	1.6	1448	1258	0.97
	1.8	1377	1303	1.01
	2	1308	1347	1.04
T5'H	0.8	2131	1115	1.06
	1	2040	1161	1.1
	1.2	1948	1208	1.15
	1.4	1822	1272	1.21
	1.6	1733	1318	1.25
	1.8	1655	1358	1.29
	2	1582	1395	1.33

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

4 Ton - High-Static Drive Models: DHG0483, DHG0484, DHG0487W
115,000 BTU

Down Flow

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP	SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
	0.8	1092	875	0.37		0.8	1092	875	0.37
	1	1007	927	0.4		1	1007	927	0.4
	1.2	880	991	0.42		1.2	880	991	0.42
T1C*	1.4	789	1042	0.45	T1'H*	1.4	789	1042	0.45
	1.6	692	1090	0.47		1.6	692	1090	0.47
	1.8	612	1134	0.49		1.8	612	1134	0.49
	2	509	1191	0.52		2	509	1191	0.52
	0.8	1510	927	0.56		0.8	1510	927	0.56
	1	1369	995	0.6		1	1369	995	0.6
	1.2	1285	1040	0.63		1.2	1285	1040	0.63
T2C**	1.4	1202	1085	0.66	T2'H**	1.4	1202	1085	0.66
	1.6	1130	1133	0.69		1.6	1130	1133	0.69
	1.8	1044	1178	0.71		1.8	1044	1178	0.71
	2	918	1233	0.75		2	918	1233	0.75
	0.8	1782	993	0.77		0.8	1782	993	0.77
	1	1711	1034	0.8		1	1711	1034	0.8
	1.2	1576	1102	0.85		1.2	1576	1102	0.85
T3C	1.4	1494	1143	0.88	T3'H	1.4	1494	1143	0.88
	1.6	1419	1183	0.91		1.6	1419	1183	0.91
	1.8	1349	1225	0.95		1.8	1349	1225	0.95
	2	1282	1266	0.98		2	1282	1266	0.98
	0.8	1921	1026	0.89		0.8	1921	1026	0.89
	1	1848	1066	0.93		1	1848	1066	0.93
	1.2	1742	1123	0.98		1.2	1742	1123	0.98
T4C	1.4	1640	1174	1.02	T4'H	1.4	1640	1174	1.02
	1.6	1580	1214	1.05		1.6	1580	1214	1.05
	1.8	1504	1251	1.09		1.8	1504	1251	1.09
	2	1440	1289	1.12		2	1440	1289	1.12
	0.8	2064	1053	1		0.8	2064	1053	1
	1	1978	1096	1.04		1	1978	1096	1.04
	1.2	1909	1136	1.08		1.2	1909	1136	1.08
T5C	1.4	1786	1196	1.14	T5'H	1.4	1786	1196	1.14
	1.6	1698	1239	1.18		1.6	1698	1239	1.18
	1.8	1622	1277	1.22		1.8	1622	1277	1.22
	2	1550	1311	1.25		2	1550	1311	1.25

Horizontal

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP	SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
	0.8	1114	931	0.4		0.8	1114	931	0.4
	1	1028	986	0.42		1	1028	986	0.42
	1.2	898	1054	0.45		1.2	898	1054	0.45
T1C*	1.4	805	1109	0.48	T1'H*	1.4	805	1109	0.48
	1.6	706	1160	0.5		1.6	706	1160	0.5
	1.8	624	1206	0.52		1.8	624	1206	0.52
	2	519	1266	0.55		2	519	1266	0.55
	0.8	1541	987	0.6		0.8	1541	987	0.6
	1	1397	1058	0.64		1	1397	1058	0.64
	1.2	1311	1106	0.67		1.2	1311	1106	0.67
T2C**	1.4	1227	1154	0.7	T2'H**	1.4	1227	1154	0.7
	1.6	1153	1205	0.73		1.6	1153	1205	0.73
	1.8	1065	1253	0.76		1.8	1065	1253	0.76
	2	937	1312	0.8		2	937	1312	0.8
	0.8	1818	1056	0.82		0.8	1818	1056	0.82
	1	1746	1100	0.85		1	1746	1100	0.85
	1.2	1608	1172	0.91		1.2	1608	1172	0.91
T3C	1.4	1524	1216	0.94	T3'H	1.4	1524	1216	0.94
	1.6	1448	1258	0.97		1.6	1448	1258	0.97
	1.8	1377	1303	1.01		1.8	1377	1303	1.01
	2	1308	1347	1.04		2	1308	1347	1.04
	0.8	1960	1092	0.95		0.8	1960	1092	0.95
	1	1886	1134	0.99		1	1886	1134	0.99
	1.2	1778	1195	1.04		1.2	1778	1195	1.04
T4C	1.4	1673	1249	1.09	T4'H	1.4	1673	1249	1.09
	1.6	1612	1291	1.12		1.6	1612	1291	1.12
	1.8	1535	1331	1.16		1.8	1535	1331	1.16
	2	1469	1371	1.19		2	1469	1371	1.19
	0.8	2131	1115	1.06		0.8	2131	1115	1.06
	1	2040	1161	1.1		1	2040	1161	1.1
	1.2	1948	1208	1.15		1.2	1948	1208	1.15
T5C	1.4	1822	1272	1.21	T5'H	1.4	1822	1272	1.21
	1.6	1733	1318	1.25		1.6	1733	1318	1.25
	1.8	1655	1358	1.29		1.8	1655	1358	1.29
	2	1582	1395	1.33		2	1582	1395	1.33

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

4 Ton - High-Static Drive Models: DHG0483, DHG0484, DHG0487W
140,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1C*	0.8	1092	875	0.37	T1'H*	0.8	1015	856	0.34
	1	1007	927	0.4		1	924	914	0.36
	1.2	880	991	0.42		1.2	791	978	0.38
	1.4	789	1042	0.45		1.4	700	1028	0.4
	1.6	692	1090	0.47		1.6	600	1079	0.42
	1.8	612	1134	0.49		1.8	492	1139	0.44
	2	509	1191	0.52		2			
T2C**	0.8	1510	927	0.56	T2'H**	0.8	1092	875	0.37
	1	1369	995	0.6		1	1007	927	0.4
	1.2	1285	1040	0.63		1.2	880	991	0.42
	1.4	1202	1085	0.66		1.4	789	1042	0.45
	1.6	1130	1133	0.69		1.6	692	1090	0.47
	1.8	1044	1178	0.71		1.8	612	1134	0.49
	2	918	1233	0.75		2	509	1191	0.52
T3C	0.8	1782	993	0.77	T3'H	0.8	1510	927	0.56
	1	1711	1034	0.8		1	1369	995	0.6
	1.2	1576	1102	0.85		1.2	1285	1040	0.63
	1.4	1494	1143	0.88		1.4	1202	1085	0.66
	1.6	1419	1183	0.91		1.6	1130	1133	0.69
	1.8	1349	1225	0.95		1.8	1044	1178	0.71
	2	1282	1266	0.98		2	918	1233	0.75
T4C	0.8	1921	1026	0.89	T4'H	0.8	1921	1026	0.89
	1	1848	1066	0.93		1	1848	1066	0.93
	1.2	1742	1123	0.98		1.2	1742	1123	0.98
	1.4	1640	1174	1.02		1.4	1640	1174	1.02
	1.6	1580	1214	1.05		1.6	1580	1214	1.05
	1.8	1504	1251	1.09		1.8	1504	1251	1.09
	2	1440	1289	1.12		2	1440	1289	1.12
T5C	0.8	2064	1053	1	T5'H	0.8	2064	1053	1
	1	1978	1096	1.04		1	1978	1096	1.04
	1.2	1909	1136	1.08		1.2	1909	1136	1.08
	1.4	1786	1196	1.14		1.4	1786	1196	1.14
	1.6	1698	1239	1.18		1.6	1698	1239	1.18
	1.8	1622	1277	1.22		1.8	1622	1277	1.22
	2	1550	1311	1.25		2	1550	1311	1.25

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1C*	0.8	1114	931	0.4	T1'H*	0.8	1036	911	0.36
	1	1028	986	0.42		1	943	972	0.38
	1.2	898	1054	0.45		1.2	807	1040	0.41
	1.4	805	1109	0.48		1.4	714	1094	0.43
	1.6	706	1160	0.5		1.6	612	1148	0.45
	1.8	624	1206	0.52		1.8	502	1212	0.47
	2	519	1266	0.55		2			
T2C**	0.8	1541	987	0.6	T2'H**	0.8	1114	931	0.4
	1	1397	1058	0.64		1	1028	986	0.42
	1.2	1311	1106	0.67		1.2	898	1054	0.45
	1.4	1227	1154	0.7		1.4	805	1109	0.48
	1.6	1153	1205	0.73		1.6	706	1160	0.5
	1.8	1065	1253	0.76		1.8	624	1206	0.52
	2	937	1312	0.8		2	519	1266	0.55
T3C	0.8	1818	1056	0.82	T3'H	0.8	1818	1056	0.82
	1	1746	1100	0.85		1	1746	1100	0.85
	1.2	1608	1172	0.91		1.2	1608	1172	0.91
	1.4	1524	1216	0.94		1.4	1524	1216	0.94
	1.6	1448	1258	0.97		1.6	1448	1258	0.97
	1.8	1377	1303	1.01		1.8	1377	1303	1.01
	2	1308	1347	1.04		2	1308	1347	1.04
T4C	0.8	1960	1092	0.95	T4'H	0.8	1960	1092	0.95
	1	1886	1134	0.99		1	1886	1134	0.99
	1.2	1778	1195	1.04		1.2	1778	1195	1.04
	1.4	1673	1249	1.09		1.4	1673	1249	1.09
	1.6	1612	1291	1.12		1.6	1612	1291	1.12
	1.8	1535	1331	1.16		1.8	1535	1331	1.16
	2	1469	1371	1.19		2	1469	1371	1.19
T5C	0.8	2131	1115	1.06	T5'H	0.8	2131	1115	1.06
	1	2040	1161	1.1		1	2040	1161	1.1
	1.2	1948	1208	1.15		1.2	1948	1208	1.15
	1.4	1822	1272	1.21		1.4	1822	1272	1.21
	1.6	1733	1318	1.25		1.6	1733	1318	1.25
	1.8	1655	1358	1.29		1.8	1655	1358	1.29
	2	1582	1395	1.33		2	1582	1395	1.33

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

5 Ton - High-Static Drive Models: DHG0603, DHG0604, DHG0607W
70,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
	0.8	819	806	0.23		0.8	819	806	0.23
	1	680	873	0.25		1	680	873	0.25
	1.2	584	929	0.27		1.2	584	929	0.27
T1C*	1.4				T1'H*	1.4			
	1.6					1.6			
	1.8					1.8			
	2					2			
	0.8	1551	930	1		0.8	1680	957	1.21
	1	1455	980	1.05		1	1591	1006	1.27
	1.2	1367	1033	1.11		1.2	1500	1055	1.33
T2C**	1.4	1290	1080	1.16	T2'H**	1.4	1424	1101	1.39
	1.6	1213	1126	1.21		1.6	1348	1147	1.45
	1.8	1136	1172	1.26		1.8	1275	1193	1.5
	2	1079	1205	1.29		2	1208	1231	1.55
	0.8	1098	1052	0.7		0.8	1895	1004	0.29
	1	2036	1095	0.73		1	1829	1047	0.3
	1.2	1971	1136	0.76		1.2	1746	1093	0.31
T3C	1.4	1887	1180	0.79	T3'H	1.4	1654	1140	0.33
	1.6	1805	1221	0.81		1.6	1580	1184	0.34
	1.8	1755	1252	0.83		1.8	1506	1225	0.35
	2	1660	1305	0.87		2	1451	1268	0.36
	0.8	2236	1094	0.89		0.8	2446	1157	1.82
	1	2175	1133	0.92		1	2390	1193	1.87
	1.2	2117	1171	0.95		1.2	2331	1230	1.93
T4C	1.4	2048	1211	0.98	T4'H	1.4	2273	1266	1.99
	1.6	1958	1252	1.01		1.6	2207	1303	2.05
	1.8	1880	1293	1.05		1.8	2116	1351	2.12
	2	1843	1321	1.07		2	2037	1390	2.18
	0.8	2446	1157	1.82		0.8			
	1	2390	1193	1.87		1			
	1.2	2331	1230	1.93		1.2	2581	13339	2.1
T5C	1.4	2273	1266	1.99	T5'H	1.4	2513	1378	2.16
	1.6	2207	1303	2.05		1.6	2460	1417	2.23
	1.8	2116	1351	2.12		1.8	2391	1456	2.29
	2	2037	1390	2.18		2	2328	1500	2.36

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
	0.8	836	857	0.24		0.8	836	857	0.24
	1	694	929	0.27		1	694	929	0.27
	1.2	596	989	0.28		1.2	596	989	0.28
T1C*	1.4				T1'H*	1.4			
	1.6					1.6			
	1.8					1.8			
	2					2			
	0.8	1583	989	1.06		0.8	1714	1018	1.28
	1	1485	1043	1.12		1	1623	1070	1.35
	1.2	1395	1099	1.18		1.2	1531	1122	1.42
T2C**	1.4	1316	1149	1.23	T2'H**	1.4	1453	1171	1.48
	1.6	1238	1198	1.28		1.6	1375	1220	1.54
	1.8	1159	1247	1.34		1.8	1301	1269	1.6
	2	1101	1282	1.37		2	1233	1310	1.65
	0.8	2141	1119	0.75		0.8	1934	1068	0.31
	1	2078	1165	0.78		1	1866	1114	0.32
	1.2	2011	1208	0.81		1.2	1782	1163	0.33
T3C	1.4	1925	1255	0.84	T3'H	1.4	1688	1213	0.35
	1.6	1842	1299	0.87		1.6	1612	1260	0.36
	1.8	1791	1332	0.89		1.8	1537	1303	0.37
	2	1694	1388	0.92		2	1481	1349	0.39
	0.8	2282	1164	0.94		0.8	2496	1231	1.93
	1	2219	1205	0.98		1	2439	1269	1.99
	1.2	2160	1246	1.01		1.2	2379	1308	2.05
T4C	1.4	2090	1288	1.04	T4'H	1.4	2319	1347	2.12
	1.6	1998	1332	1.08		1.6	2252	1386	2.18
	1.8	1918	1376	1.11		1.8	2159	1437	2.26
	2	1881	1405	1.14		2	2079	1479	2.32
	0.8	2496	1231	1.93		0.8	2774	1296	2.04
	1	2439	1269	1.99		1			
	1.2	2379	1308	2.05		1.2			
T5C	1.4	2319	1347	2.12	T5'H	1.4	2564	1406	2.21
	1.6	2252	1386	2.18		1.6	2511	1446	2.27
	1.8	2159	1437	2.26		1.8	2440	1486	2.33
	2	2079	1479	2.32		2	2375	1531	2.4

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

5 Ton - High-Static Drive Models: DHG0603, DHG0604, DHG0607W
115,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
	0.8	819	806	0.23		0.8	819	806	0.23
	1	680	873	0.25		1	680	873	0.25
	1.2	584	929	0.27		1.2	584	929	0.27
T1C*	1.4				T1'H*	1.4			
	1.6					1.6			
	1.8					1.8			
	2					2			
	0.8	1551	930	1		0.8	1475	916	0.51
	1	1455	980	1.05		1	1379	967	0.54
	1.2	1367	1033	1.11		1.2	1293	1021	0.57
T2C**	1.4	1290	1080	1.16	T2'H**	1.4	1218	1068	0.6
	1.6	1213	1126	1.21		1.6	1134	1120	0.63
	1.8	1136	1172	1.26		1.8	1017	1173	0.66
	2	1079	1205	1.29		2	938	1218	0.68
	0.8	1098	1052	0.7		0.8	1475	916	0.51
	1	2036	1095	0.73		1	1379	967	0.54
	1.2	1971	1136	0.76		1.2	1293	1021	0.57
T3C	1.4	1887	1180	0.79	T3'H	1.4	1218	1068	0.6
	1.6	1805	1221	0.81		1.6	1134	1120	0.63
	1.8	1755	1252	0.83		1.8	1017	1173	0.66
	2	1660	1305	0.87		2	938	1218	0.68
	0.8	2236	1094	0.89		0.8	1895	1004	0.29
	1	2175	1133	0.92		1	1829	1047	0.3
	1.2	2117	1171	0.95		1.2	1746	1093	0.31
T4C	1.4	2048	1211	0.98	T4'H	1.4	1654	1140	0.33
	1.6	1958	1252	1.01		1.6	1580	1184	0.34
	1.8	1880	1293	1.05		1.8	1506	1225	0.35
	2	1843	1321	1.07		2	1451	1268	0.36
	0.8	2446	1157	1.46		0.8	2446	1157	1.46
	1	2390	1193	1.5		1	2390	1193	1.5
	1.2	2331	1230	1.55		1.2	2331	1230	1.55
T5C	1.4	2273	1266	1.6	T5'H	1.4	2273	1266	1.6
	1.6	2207	1303	1.64		1.6	2207	1303	1.64
	1.8	2116	1351	1.7		1.8	2116	1351	1.7
	2	2037	1390	1.75		2	2037	1390	1.75

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
	0.8	836	857	0.24		0.8	836	857	0.24
	1	694	929	0.27		1	694	929	0.27
	1.2	596	989	0.28		1.2	596	989	0.28
T1C*	1.4				T1'H*	1.4			
	1.6					1.6			
	1.8					1.8			
	2					2			
	0.8	1583	989	0.59		0.8	1505	974	0.54
	1	1485	1043	0.62		1	1407	1029	0.58
	1.2	1395	1099	0.65		1.2	1319	1086	0.61
T2C**	1.4	1316	1149	0.68	T2'H**	1.4	1243	1136	0.64
	1.6	1238	1198	0.71		1.6	1157	1191	0.67
	1.8	1159	1247	0.74		1.8	1038	1248	0.7
	2	1101	1282	0.76		2	957	1296	0.72
	0.8	2141	1119	1.07		0.8	1505	974	0.54
	1	2078	1165	1.11		1	1407	1029	0.58
	1.2	2011	1208	1.15		1.2	1319	1086	0.61
T3C	1.4	1925	1255	1.19	T3'H	1.4	1243	1136	0.64
	1.6	1842	1299	1.24		1.6	1157	1191	0.67
	1.8	1791	1332	1.27		1.8	1038	1248	0.7
	2	1694	1388	1.32		2	957	1296	0.72
	0.8	2282	1164	1.25		0.8	1934	1068	0.86
	1	2219	1205	1.29		1	1866	1114	0.9
	1.2	2160	1246	1.33		1.2	1782	1163	0.94
T4C	1.4	2090	1288	1.38	T4'H	1.4	1688	1213	0.98
	1.6	1998	1332	1.43		1.6	1612	1260	1.02
	1.8	1918	1376	1.47		1.8	1537	1303	1.05
	2	1881	1405	1.5		2	1481	1349	1.09
	0.8	2496	1231	1.55		0.8	2496	1231	1.55
	1	2439	1269	1.6		1	2439	1269	1.6
	1.2	2379	1308	1.65		1.2	2379	1308	1.65
T5C	1.4	2319	1347	1.7	T5'H	1.4	2319	1347	1.7
	1.6	2252	1386	1.75		1.6	2252	1386	1.75
	1.8	2159	1437	1.81		1.8	2159	1437	1.81
	2	2079	1479	1.87		2	2079	1479	1.87

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

5 Ton - High-Static Drive Models: DHG0603, DHG0604, DHG0607W
140,000 BTU

Down Flow

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP	SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
	0.8	819	806	0.23		0.8	1895	1004	0.29
	1	680	873	0.25		1	1829	1047	0.3
	1.2	584	929	0.27		1.2	1746	1093	0.31
T1C*	1.4				T1'H*	1.4	1654	1140	0.33
	1.6					1.6	1580	1184	0.34
	1.8					1.8	1506	1225	0.35
	2					2	1451	1268	0.36
	0.8	1551	930	1		0.8	2236	1094	0.89
	1	1455	980	1.05		1	2175	1133	0.92
	1.2	1367	1033	1.11		1.2	2117	1171	0.95
T2C**	1.4	1290	1080	1.16	T2'H**	1.4	2048	1211	0.98
	1.6	1213	1126	1.21		1.6	1958	1252	1.01
	1.8	1136	1172	1.26		1.8	1880	1293	1.05
	2	1079	1205	1.29		2	1843	1321	1.07
	0.8	2098	1052	0.7		0.8	2635	1245	1.79
	1	2036	1095	0.73		1	2569	1279	1.84
	1.2	1971	1136	0.76		1.2	2502	1319	1.9
T3C	1.4	1887	1180	0.79	T3'H	1.4	2432	1356	1.95
	1.6	1805	1221	0.81		1.6	2371	1397	2.01
	1.8	1755	1252	0.83		1.8	2293	1446	2.08
	2	1660	1305	0.87		2	2197	1507	2.17
	0.8	2236	1094	0.89		0.8	2446	1157	1.82
	1	2175	1133	0.92		1	2390	1193	1.87
	1.2	2117	1171	0.95		1.2	2331	1230	1.93
T4C	1.4	2048	1211	0.98	T4'H	1.4	2273	1266	1.99
	1.6	1958	1252	1.01		1.6	2207	1303	2.05
	1.8	1880	1293	1.05		1.8	2116	1351	2.12
	2	1843	1321	1.07		2	2037	1390	2.18
	0.8	2446	1157	1.82		0.8	2719	1270	2
	1	2390	1193	1.87		1	2644	1305	2.05
	1.2	2331	1230	1.93		1.2	2581	1339	2.1
T5C	1.4	2273	1266	1.99	T5'H	1.4	2513	1378	2.16
	1.6	2207	1303	2.05		1.6	2460	1417	2.23
	1.8	2116	1351	2.12		1.8	2391	1456	2.29
	2	2037	1390	2.18		2	2328	1500	2.36

Horizontal

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP	SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
	0.8	836	857	0.24		1934	1068	0.31	0.31
	1	694	929	0.27		1	1866	1114	0.32
	1.2	596	989	0.28		1.2	1782	1163	0.33
T1C*	1.4				0.8	1.4	1688	1213	0.35
	1.6					1.6	1612	1260	0.36
	1.8					1.8	1537	1303	0.37
	2					2	1481	1349	0.39
	0.8	1583	989	1.06		2282	1164	0.94	0.94
	1	1485	1043	1.12		1	2219	1205	0.98
	1.2	1395	1099	1.18		1.2	2160	1246	1.01
T2C**	1.4	1316	1149	1.23	0.8	1.4	2090	1288	1.04
	1.6	1238	1198	1.28		1.6	1998	1332	1.08
	1.8	1159	1247	1.34		1.8	1918	1376	1.11
	2	1101	1282	1.37		2	1881	1405	1.14
	0.8	2141	1119	0.75		2689	1270	1.82	1.82
	1	2078	1165	0.78		1	2622	1305	1.88
	1.2	2011	1208	0.81		1.2	2553	1346	1.94
T3C	1.4	1925	1255	0.84	0.8	1.4	2482	1384	1.99
	1.6	1842	1299	0.87		1.6	2420	1426	2.05
	1.8	1791	1332	0.89		1.8	2340	1475	2.12
	2	1694	1388	0.92		2	2242	1538	2.21
	0.8	2282	1164	0.94		2496	1231	1.93	1.93
	1	2219	1205	0.98		1	2439	1269	1.99
	1.2	2160	1246	1.01		1.2	2379	1308	2.05
T4C	1.4	2090	1288	1.04	0.8	1.4	2319	1347	2.12
	1.6	1998	1332	1.08		1.6	2252	1386	2.18
	1.8	1918	1376	1.11		1.8	2159	1437	2.26
	2	1881	1405	1.14		2	2079	1479	2.32
	0.8	2496	1231	1.93		2774	1296	2.04	2.04
	1	2439	1269	1.99		1	2698	1332	2.09
	1.2	2379	1308	2.05		1.2	2633	1366	2.15
T5C	1.4	2319	1347	2.12	0.8	1.4	2564	1406	2.21
	1.6	2252	1386	2.18		1.6	2511	1446	2.27
	1.8	2159	1437	2.26		1.8	2440	1486	2.33
	2	2079	1479	2.32		2	2375	1531	2.4

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

6 Ton - High-Static Drive Models: DHG0723, DHG0724, DHG0727W
70,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP
T1C*	0.8	1035	849	0.3
	1	925	910	0.32
	1.2	807	978	0.34
	1.4	689	1045	0.36
	1.6			
	1.8			
	2			
T2C**	0.8	1796	967	0.68
	1	1718	1024	0.72
	1.2	1578	1090	0.77
	1.4	1506	1135	0.8
	1.6	1431	1176	0.83
	1.8	1360	1220	0.86
	2	1281	1261	0.89
T3C	0.8	2582	1172	1.55
	1	2528	1207	1.59
	1.2	2479	1240	1.64
	1.4	2422	1277	1.69
	1.6	2367	1314	1.74
	1.8	2305	1355	1.79
	2	2224	1402	1.85
T4C	0.8	2661	1191	1.67
	1	2612	1225	1.72
	1.2	2560	1261	1.77
	1.4	2509	1294	1.82
	1.6	2454	1331	1.87
	1.8	2393	1369	1.92
	2	2331	1412	1.98
T5C	0.8	2764	1220	1.84
	1	2707	1254	1.89
	1.2	2661	1291	1.94
	1.4	2616	1322	1.99
	1.6	2573	1357	2.04
	1.8	2528	1398	2.1
	2	2483	1435	2.16

SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1'H*	0.8	1035	849	0.3
	1	925	910	0.32
	1.2	807	978	0.34
	1.4	689	1045	0.36
	1.6			
	1.8			
	2			
T2'H**	0.8	1381	921	0.47
	1	1293	968	0.5
	1.2	1211	1018	0.52
	1.4	1125	1068	0.55
	1.6	1030	1125	0.58
	1.8	935	1181	0.6
	2	839	1238	0.62
T3'H	0.8	2582	1172	1.55
	1	2528	1207	1.59
	1.2	2479	1240	1.64
	1.4	2422	1277	1.69
	1.6	2367	1314	1.74
	1.8	2305	1355	1.79
	2	2224	1402	1.85
T4'H	0.8	2661	1191	1.67
	1	2612	1225	1.72
	1.2	2560	1261	1.77
	1.4	2509	1294	1.82
	1.6	2454	1331	1.87
	1.8	2393	1369	1.92
	2	2331	1412	1.98
T5'H	0.8	2764	1220	1.84
	1	2707	1254	1.89
	1.2	2661	1291	1.94
	1.4	2616	1322	1.99
	1.6	2573	1357	2.04
	1.8	2528	1398	2.1
	2	2483	1435	2.16

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP
T1C*	0.8	1056	903	0.32
	1	944	968	0.35
	1.2	824	1040	0.38
	1.4	704	1112	0.42
	1.6			
	1.8			
	2			
T2C**	0.8	1833	1029	0.72
	1	1753	1089	0.76
	1.2	1610	1160	0.81
	1.4	1537	1207	0.85
	1.6	1460	1251	0.88
	1.8	1388	1298	0.91
	2	1307	1342	0.94
T3C	0.8	2635	1247	1.65
	1	2580	1284	1.7
	1.2	2530	1319	1.74
	1.4	2471	1358	1.79
	1.6	2415	1398	1.85
	1.8	2352	1442	1.9
	2	2269	1491	1.97
T4C	0.8	2715	1267	1.78
	1	2665	1303	1.83
	1.2	2612	1341	1.88
	1.4	2560	1377	1.93
	1.6	2504	1416	1.99
	1.8	2442	1456	2.04
	2	2384	1495	2.09
T5C	0.8	2820	1298	1.95
	1	2762	1334	2.01
	1.2	2715	1373	2.07
	1.4	2669	1406	2.21
	1.6	2626	1444	2.17
	1.8	2580	1487	2.24
	2	2528	1525	2.3

SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1'H*	0.8	1056	903	0.32
	1	944	968	0.35
	1.2	824	1040	0.38
	1.4	704	1112	0.42
	1.6			
	1.8			
	2			
T2'H**	0.8	1409	980	0.5
	1	1319	1030	0.53
	1.2	1236	1083	0.55
	1.4	1148	1136	0.58
	1.6	1051	1196	0.62
	1.8	954	1257	0.65
	2	856	1317	0.68
T3'H	0.8	2635	1247	1.65
	1	2580	1284	1.7
	1.2	2530	1319	1.74
	1.4	2471	1358	1.79
	1.6	2415	1398	1.85
	1.8	2352	1442	1.9
	2	2269	1491	1.97
T4'H	0.8	2715	1267	1.78
	1	2665	1303	1.83
	1.2	2612	1341	1.88
	1.4	2560	1377	1.93
	1.6	2504	1416	1.99
	1.8	2442	1456	2.04
	2	2384	1495	2.09
T5'H	0.8	2820	1298	1.95
	1	2762	1334	2.01
	1.2	2715	1373	2.07
	1.4	2669	1406	2.21
	1.6	2626	1444	2.17
	1.8	2580	1487	2.24
	2	2528	1525	2.3

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

6 Ton - High-Static Drive Models: DHG0723, DHG0724, DHG0727W
125,000 BTU

Down Flow

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP	SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
	0.8	1035	849	0.3		0.8	1035	849	0.3
	1	925	910	0.32		1	925	910	0.32
	1.2	807	978	0.34		1.2	807	978	0.34
T1C*	1.4	689	1045	0.36	T1'H*	1.4	689	1045	0.36
	1.6					1.6			
	1.8					1.8			
	2					2			
	0.8	1796	967	0.68		0.8	1589	944	0.57
	1	1718	1024	0.72		1	1505	996	0.6
	1.2	1578	1090	0.77		1.2	1395	1054	0.64
T2C**	1.4	1506	1135	0.8	T2'H**	1.4	1316	1101	0.67
	1.6	1431	1176	0.83		1.6	1215	1155	0.7
	1.8	1360	1220	0.86		1.8	1130	1206	0.73
	2	1281	1261	0.89		2	1041	1255	0.76
	0.8	2582	1172	1.55		0.8	1381	921	0.47
	1	2528	1207	1.59		1	1293	968	0.5
	1.2	2479	1240	1.64		1.2	1211	1018	0.52
T3C	1.4	2422	1277	1.69	T3'H	1.4	1125	1068	0.55
	1.6	2422	1314	1.74		1.6	1030	1125	0.58
	1.8	2367	1355	1.79		1.8	935	1181	0.6
	2	2305	1402	1.85		2	839	1238	0.62
	0.8	2661	1191	1.67		0.8	1796	967	0.68
	1	2612	1225	1.72		1	1715	1024	0.72
	1.2	2560	1261	1.77		1.2	1578	1090	0.77
T4C	1.4	2509	1294	1.82	T4'H	1.4	1506	1135	0.8
	1.6	2454	1331	1.87		1.6	1431	1176	0.83
	1.8	2393	1369	1.92		1.8	1360	1220	0.86
	2	2331	1412	1.98		2	1281	1261	0.89
	0.8	2764	120	1.84		0.8	2661	1191	1.67
	1	2707	1254	1.89		1	2612	1225	1.72
	1.2	2661	1291	1.94		1.2	2560	1261	1.77
T5C	1.4	2616	1322	1.99	T5'H	1.4	2509	1294	1.82
	1.6	2573	1357	2.04		1.6	2454	1331	1.87
	1.8	2528	1398	2.1		1.8	2393	1369	1.92
	2	2483	1435	2.16		2	2331	1412	1.98

Horizontal

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP	SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
	0.8	1056	903	0.32		0.8	1409	980	0.5
	1	944	968	0.35		1	1319	1030	0.53
	1.2	824	1040	0.38		1.2	1236	1083	0.55
T1C*	1.4	704	1112	0.42	T1'H*	1.4	1148	1136	0.58
	1.6					1.6	1051	1196	0.62
	1.8					1.8	954	1257	0.65
	2					2	856	1317	0.68
	0.8	1833	1029	0.72		0.8	1833	1029	0.72
	1	1753	1089	0.76		1	1753	1089	0.76
	1.2	1610	1160	0.81		1.2	1610	1160	0.81
T2C**	1.4	1537	1207	0.85	T2'H**	1.4	1537	1207	0.85
	1.6	1460	1251	0.88		1.6	1460	1251	0.88
	1.8	1388	1298	0.91		1.8	1388	1298	0.91
	2	1307	1342	0.94		2	1307	1342	0.94
	0.8	2635	1247	1.65		0.8	2316	1153	1.19
	1	2580	1284	1.7		1	2260	1194	1.24
	1.2	2530	1319	1.74		1.2	2194	1235	1.28
T3C	1.4	2471	1358	1.79	T3'H	1.4	2126	1280	1.33
	1.6	2415	1398	1.85		1.6	2026	1340	1.39
	1.8	2352	1442	1.9		1.8	1894	1392	1.44
	2	2269	1491	1.97		2	1835	1431	1.48
	0.8	2715	1267	1.78		0.8	2715	1267	1.78
	1	2665	1303	1.83		1	2665	1303	1.83
	1.2	2612	1341	1.88		1.2	2612	1341	1.88
T4C	1.4	2560	1377	1.93	T4'H	1.4	2560	1377	1.93
	1.6	2504	1416	1.99		1.6	2504	1416	1.99
	1.8	2442	1456	2.04		1.8	2442	1456	2.04
	2	2384	1495	2.09		2	2384	1495	2.09
	0.8	2820	1298	1.95		0.8	2820	1298	1.95
	1	2762	1334	2.01		1	2762	1334	2.01
	1.2	2715	1373	2.07		1.2	2715	1373	2.07
T5C	1.4	2669	1406	2.12	T5'H	1.4	2669	1406	2.12
	1.6	2626	1444	2.17		1.6	2626	1444	2.17
	1.8	2580	1487	2.24		1.8	2580	1487	2.24
	2	2528	1525	2.3		2	2528	1525	2.3

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

6 Ton - High-Static Drive Models: DHG0723, DHG0724, DHG0727W
150,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP
T1C*	0.8	1035	849	0.3
	1	925	910	0.32
	1.2	807	978	0.34
	1.4	689	1045	0.36
	1.6			
	1.8			
	2			
T2C**	0.8	1796	967	0.68
	1	1718	1024	0.72
	1.2	1578	1090	0.77
	1.4	1506	1135	0.8
	1.6	1431	1176	0.83
	1.8	1360	1220	0.86
	2	1281	1261	0.89
T3C	0.8	2582	1172	1.55
	1	2528	1207	1.59
	1.2	2479	1240	1.64
	1.4	2422	1277	1.69
	1.6	2367	1314	1.74
	1.8	2305	1355	1.79
	2	2224	1402	1.85
T4C	0.8	2661	1191	1.67
	1	2612	1225	1.72
	1.2	2560	1261	1.77
	1.4	2509	1294	1.82
	1.6	2454	1331	1.87
	1.8	2393	1369	1.92
	2	2331	1412	1.98
T5C	0.8	2764	1220	1.84
	1	2707	1254	1.89
	1.2	2661	1291	1.94
	1.4	2616	1322	1.99
	1.6	2573	1357	2.04
	1.8	2528	1398	2.1
	2	2483	1435	2.16

SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1'H*	0.8	1381	921	0.47
	1	1293	968	0.5
	1.2	1211	1018	0.52
	1.4	1125	1068	0.55
	1.6	1030	1125	0.58
	1.8	935	1181	0.6
	2	839	1238	0.62
T2'H**	0.8	2270	1084	1.12
	1	2215	1122	1.16
	1.2	2150	1161	1.2
	1.4	2083	1203	1.25
	1.6	1985	1260	1.3
	1.8	1856	1308	1.35
	2	1798	1345	1.39
T3'H	0.8	2270	1084	1.12
	1	2215	1122	1.16
	1.2	2150	1161	1.2
	1.4	2083	1203	1.25
	1.6	1985	1260	1.3
	1.8	1856	1308	1.35
	2	1798	1345	1.39
T4'H	0.8	2661	11191	1.67
	1	2612	1225	1.72
	1.2	2560	1261	1.77
	1.4	2509	1294	1.82
	1.6	2454	1331	1.87
	1.8	2393	1369	1.92
	2	2331	1412	1.98
T5'H	0.8	2764	1220	1.84
	1	2707	1254	1.89
	1.2	2661	1291	1.94
	1.4	2616	1322	1.99
	1.6	2573	1357	2.04
	1.8	2528	1398	2.1
	2	2483	1435	2.16

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP
T1C*	0.8	1056	903	0.32
	1	944	968	0.35
	1.2	824	1040	0.38
	1.4	704	1112	0.42
	1.6			
	1.8			
	2			
T2C**	0.8	1833	1029	0.72
	1	1753	1089	0.76
	1.2	1610	1160	0.81
	1.4	1537	1207	0.85
	1.6	1460	1251	0.88
	1.8	1388	1298	0.91
	2	1307	1342	0.94
T3C	0.8	2635	1247	1.65
	1	2580	1284	1.7
	1.2	2530	1319	1.74
	1.4	2471	1358	1.79
	1.6	2415	1398	1.85
	1.8	2352	1442	1.9
	2	2269	1491	1.97
T4C	0.8	2715	1267	1.78
	1	2665	1303	1.83
	1.2	2612	1341	1.88
	1.4	2560	1377	1.93
	1.6	2504	1416	1.99
	1.8	2442	1456	2.04
	2	2384	1495	2.09
T5C	0.8	2820	1298	1.95
	1	2762	1334	2.01
	1.2	2715	1373	2.07
	1.4	2669	1406	2.21
	1.6	2626	1444	2.17
	1.8	2580	1487	2.24
	2	2528	1525	2.3

SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
0.8	1409	980	0.5	0.32
	1	1319	1030	0.53
	1.2	1236	1083	0.55
	1.4	1148	1136	0.58
	1.6	1051	1196	0.62
	1.8	954	1257	0.65
	2	856	1317	0.68
0.8	2316	1153	1.19	0.5
	1	2260	1194	1.24
	1.2	2194	1235	1.28
	1.4	2126	1280	1.33
	1.6	2026	1340	1.39
	1.8	1894	1392	1.44
	2	1835	1431	1.48
0.8	2316	1153	1.19	1.65
	1	2260	1194	1.24
	1.2	2194	1235	1.28
	1.4	2126	1280	1.33
	1.6	2026	1340	1.39
	1.8	1894	1392	1.44
	2	1835	1431	1.48
0.8	2715	1267	1.78	1.78
	1	2665	1303	1.83
	1.2	2612	1341	1.88
	1.4	2560	1377	1.93
	1.6	2504	1416	1.99
	1.8	2442	1456	2.04
	2	2384	1495	2.09
0.8	2820	1298	1.95	1.95
	1	2762	1334	2.01
	1.2	2715	1373	2.07
	1.4	2669	1406	2.12
	1.6	2626	1444	2.17
	1.8	2580	1487	2.24
	2	2528	1525	2.3

* IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

** IN DHG0363W/DHG0364W/DHG0367W 45K, DHG0363W/DHG0364W/DHG0367W 70K, DHG0363W/DHG0364W/DHG0367W 115K, DHG0483W/DHG0484W/DHG0487W 70K, DHG0483W/DHG0484W/DHG0487W 115K, DHG0483W/DHG0484W/DHG0487W 140K, DHG0603W/ DHG0604W/DHG0607W 70K, DHG0603W/ DHG0604W/DHG0607W 115K, DHG0603W/ DHG0604W/DHG0607W 140K, DHG0723W/DHG0724W/DHG0727W 70K, DHG0723W/DHG0724W/DHG0727W 125K, AND DHG0723W/DHG0724W/DHG0727W 150K DOWNSHOT & HORIZONTAL TABLES, T2C AND T2'H VALUES ARE FOR PART LOAD ONLY

3 - Models: DHG0361D6, DHG0363D6
Standard Static Drive • Burners High Fire Input: 60,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1000	600	0.15
	0.4	865	685	0.18
	0.6	730	750	0.19
	0.8	600	810	0.21
T2	0.2	895	570	0.12
	0.4	755	655	0.14
	0.6	610	725	0.16
	0.8	470	780	0.17
T3	0.2	1225	670	0.24
	0.4	1110	745	0.27
	0.6	985	815	0.29
	0.8	880	870	0.31
T4	0.2	1425	730	0.33
	0.4	1325	795	0.36
	0.6	1210	865	0.39
	0.8	1115	920	0.42
T5	0.2			
	0.4			
	0.6	1695	970	0.69
	0.8	1595	1035	0.74

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1050	580	0.15
	0.4	910	665	0.17
	0.6	765	730	0.19
	0.8	630	785	0.2
T2	0.2	940	555	0.12
	0.4	795	635	0.14
	0.6	640	705	0.15
	0.8	495	755	0.16
T3	0.2	1285	650	0.23
	0.4	1165	725	0.26
	0.6	1035	790	0.28
	0.8	925	845	0.3
T4	0.2	1495	710	0.32
	0.4	1390	770	0.35
	0.6	1270	840	0.38
	0.8	1170	890	0.4
T5	0.2			
	0.4			
	0.6	1780	940	0.67
	0.8	1675	1005	0.72

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

3 - Models: DHG0361D8, DHG0363D8
Standard Static Drive • Burners High Fire Input: 80,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1000	600	0.15
	0.4	865	685	0.18
	0.6	730	750	0.19
	0.8	600	810	0.21
T2	0.2	1120	640	0.2
	0.4	1000	715	0.22
	0.6	865	785	0.24
	0.8	750	840	0.26
T3	0.2	1225	670	0.24
	0.4	1110	745	0.27
	0.6	985	815	0.29
	0.8	880	870	0.31
T4	0.2	1425	730	0.33
	0.4	1325	795	0.36
	0.6	1210	865	0.39
	0.8	1115	920	0.42
T5	0.2	1900	850	0.61
	0.4	1800	910	0.65
	0.6	1695	970	0.69
	0.8	1595	1035	0.74

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1050	580	0.15
	0.4	910	665	0.17
	0.6	765	730	0.19
	0.8	630	785	0.2
T2	0.2	1175	620	0.19
	0.4	1050	695	0.22
	0.6	910	760	0.24
	0.8	790	815	0.25
T3	0.2	1285	650	0.23
	0.4	1165	725	0.26
	0.6	1035	790	0.28
	0.8	925	845	0.3
T4	0.2	1495	710	0.32
	0.4	1390	770	0.35
	0.6	1270	840	0.38
	0.8	1170	890	0.4
T5	0.2	1995	825	0.59
	0.4	1890	885	0.63
	0.6	1780	940	0.67
	0.8	1675	1005	0.72

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

3 - Models: DHG0361D1, DHG0363D1
Standard Static Drive • Burners High Fire Input: 100,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1000	600	0.15
	0.4	865	685	0.18
	0.6	730	750	0.19
	0.8	600	810	0.21
T2	0.2	1655	795	0.45
	0.4	1560	855	0.49
	0.6	1455	920	0.53
	0.8	1360	975	0.56
T3	0.2	1225	670	0.24
	0.4	1110	745	0.27
	0.6	985	815	0.29
	0.8	880	870	0.31
T4	0.2	1425	730	0.33
	0.4	1325	795	0.36
	0.6	1210	865	0.39
	0.8	1115	920	0.42
T5	0.2			
	0.4			
	0.6	1695	970	0.69
	0.8	1595	1035	0.74

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1050	580	0.15
	0.4	910	665	0.17
	0.6	765	730	0.19
	0.8	630	785	0.2
T2	0.2			
	0.4	1640	830	0.47
	0.6	1530	890	0.51
	0.8	1430	945	0.54
T3	0.2	1285	650	0.23
	0.4	1165	725	0.26
	0.6	1035	790	0.28
	0.8	925	845	0.3
T4	0.2	1495	710	0.32
	0.4	1390	770	0.35
	0.6	1270	840	0.38
	0.8	1170	890	0.4
T5	0.2			
	0.4			
	0.6	1780	940	0.67
	0.8	1675	1005	0.72

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

3 - Models: DHG0364D6, DHG0364D6
Standard Static Drive • Burners High Fire Input: 60,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	955	575	0.15
	0.4	825	660	0.17
	0.6	685	740	0.19
	0.8	555	805	0.21
T2	0.2	940	570	0.15
	0.4	810	655	0.16
	0.6	670	735	0.18
	0.8	540	800	0.2
T3	0.2	1155	640	0.23
	0.4	1050	715	0.26
	0.6	925	790	0.28
	0.8	805	855	0.31
T4	0.2	1575	780	0.44
	0.4	1505	820	0.47
	0.6	1450	895	0.56
	0.8	1365	960	0.52
T5	0.2	1490	755	0.52
	0.4	1400	810	0.56
	0.6	1310	865	0.59
	0.8	1210	930	0.63

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1010	540	0.14
	0.4	875	620	0.16
	0.6	725	695	0.18
	0.8	590	755	0.19
T2	0.2	1000	535	0.14
	0.4	860	615	0.16
	0.6	710	690	0.17
	0.8	575	750	0.18
T3	0.2	1225	600	0.21
	0.4	1115	670	0.24
	0.6	980	745	0.27
	0.8	855	805	0.29
T4	0.2	1680	740	0.42
	0.4	1570	775	0.45
	0.6	1540	815	0.48
	0.8	1450	910	0.5
T5	0.2	1575	710	0.48
	0.4	1480	760	0.52
	0.6	1385	815	0.56
	0.8	1280	880	0.6

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

3 - Models: DHG0364D8, DHG0364D8
Standard Static Drive • Burners High Fire Input: 80,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	955	575	0.15
	0.4	825	660	0.17
	0.6	685	740	0.19
	0.8	555	805	0.21
T2	0.2	1155	640	0.23
	0.4	1050	715	0.26
	0.6	925	790	0.28
	0.8	805	855	0.31
T3	0.2	1155	640	0.23
	0.4	1050	715	0.26
	0.6	925	790	0.28
	0.8	805	855	0.31
T4	0.2	1375	715	0.34
	0.4	1290	770	0.37
	0.6	1200	845	0.43
	0.8	1100	910	0.42
T5	0.2	1525	765	0.55
	0.4	1435	820	0.59
	0.6	1350	875	0.62
	0.8	1250	940	0.67

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1010	540	0.14
	0.4	875	620	0.16
	0.6	725	695	0.18
	0.8	590	755	0.19
T2	0.2	1225	600	0.21
	0.4	1115	670	0.24
	0.6	980	745	0.27
	0.8	855	805	0.29
T3	0.2	1225	600	0.21
	0.4	1115	670	0.24
	0.6	980	745	0.27
	0.8	855	805	0.29
T4	0.2	1465	675	0.32
	0.4	1355	725	0.35
	0.6	1275	780	0.38
	0.8	1165	860	0.4
T5	0.2	1615	720	0.51
	0.4	1520	770	0.55
	0.6	1430	825	0.59
	0.8	1325	885	0.63

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

3 - Models: DHG0364D1, DHG0364D1
Standard Static Drive • Burners High Fire Input: 100,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	955	575	0.15
	0.4	825	660	0.17
	0.6	685	740	0.19
	0.8	555	805	0.21
T2	0.2	1310	695	0.39
	0.4	1205	760	0.42
	0.6	1100	825	0.45
	0.8	990	890	0.48
T3	0.2	1155	640	0.23
	0.4	1050	715	0.26
	0.6	925	790	0.28
	0.8	805	855	0.31
T4	0.2	1375	715	0.34
	0.4	1290	770	0.37
	0.6	1200	845	0.43
	0.8	1100	910	0.42
T5	0.2	1525	765	0.55
	0.4	1435	820	0.59
	0.6	1350	875	0.62
	0.8	1250	940	0.67

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1010	540	0.14
	0.4	875	620	0.16
	0.6	725	695	0.18
	0.8	590	755	0.19
T2	0.2	1385	655	0.36
	0.4	1280	715	0.39
	0.6	1165	775	0.42
	0.8	1050	835	0.45
T3	0.2	1225	600	0.21
	0.4	1115	670	0.24
	0.6	980	745	0.27
	0.8	855	805	0.29
T4	0.2	1465	675	0.32
	0.4	1355	725	0.35
	0.6	1275	780	0.38
	0.8	1165	860	0.4
T5	0.2	1615	720	0.51
	0.4	1520	770	0.55
	0.6	1430	825	0.59
	0.8	1325	885	0.63

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

4 - Models: DHG0481D8, DHG0483D8
Standard Static Drive • Burners High Fire Input: 80,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	945	565	0.1
	0.4	790	655	0.13
	0.6	645	725	0.15
	0.8	515	800	0.17
T2	0.2	1260	660	0.24
	0.4	1140	735	0.26
	0.6	1015	805	0.29
	0.8	895	870	0.31
T3	0.2	1510	740	0.36
	0.4	1410	800	0.39
	0.6	1305	870	0.42
	0.8	1195	925	0.45
T4	0.2	1620	780	0.43
	0.4	1530	830	0.45
	0.6	1425	895	0.49
	0.8	1330	950	0.52
T5	0.2	1805	840	0.56
	0.4	1715	890	0.59
	0.6	1630	940	0.63
	0.8	1550	990	0.66

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	990	545	0.12
	0.4	830	635	0.13
	0.6	680	710	0.15
	0.8	540	775	0.16
T2	0.2	1325	640	0.23
	0.4	1195	715	0.26
	0.6	1065	780	0.28
	0.8	940	845	0.3
T3	0.2	1585	720	0.35
	0.4	1480	775	0.38
	0.6	1370	845	0.41
	0.8	1255	895	0.43
T4	0.2	1700	755	0.41
	0.4	1605	805	0.44
	0.6	1495	870	0.48
	0.8	1395	920	0.5
T5	0.2	1895	815	0.54
	0.4	1800	865	0.58
	0.6	1710	910	0.61
	0.8	1630	960	0.64

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

4 - Models: DHG0481D1, DHG0483D1
Standard Static Drive • Burners High Fire Input: 100,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	950	565	0.11
	0.4	795	660	0.13
	0.6	645	725	0.15
	0.8	520	800	0.16
T2	0.2	1405	710	0.3
	0.4	1300	770	0.33
	0.6	1185	845	0.36
	0.8	1070	900	0.39
T3	0.2	1510	740	0.36
	0.4	1410	800	0.39
	0.6	1305	870	0.42
	0.8	1195	925	0.45
T4	0.2	1620	780	0.43
	0.4	1530	830	0.45
	0.6	1425	895	0.49
	0.8	1330	950	0.52
T5	0.2	1805	840	0.56
	0.4	1715	890	0.59
	0.6	1630	940	0.63
	0.8	1550	990	0.66

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	995	545	0.11
	0.4	835	640	0.13
	0.6	685	710	0.15
	0.8	545	775	0.16
T2	0.2	1475	690	0.3
	0.4	1365	745	0.32
	0.6	1245	820	0.35
	0.8	1125	875	0.37
T3	0.2	1585	720	0.35
	0.4	1480	775	0.38
	0.6	1370	845	0.41
	0.8	1255	895	0.43
T4	0.2	1700	755	0.41
	0.4	1605	805	0.44
	0.6	1495	870	0.48
	0.8	1395	920	0.5
T5	0.2	1895	815	0.54
	0.4	1800	865	0.58
	0.6	1710	910	0.61
	0.8	1630	960	0.64

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

4 - Models: DHG0484D8
Standard Static Drive • Burners High Fire Input: 80,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	920	565	0.11
	0.4	760	655	0.14
	0.6	620	730	0.15
	0.8	480	795	0.16
T2	0.2	1240	665	0.24
	0.4	1135	730	0.24
	0.6	1005	795	0.27
	0.8	880	870	0.3
T3	0.2	1515	750	0.36
	0.4	1420	805	0.39
	0.6	1315	870	0.42
	0.8	1205	930	0.45
T4	0.2	1710	820	0.5
	0.4	1620	865	0.53
	0.6	1535	925	0.56
	0.8	1435	975	0.59
T5	0.2	1820	855	0.58
	0.4	1730	900	0.61
	0.6	1655	955	0.65
	0.8	1560	1005	0.68

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	970	535	0.1
	0.4	805	620	0.12
	0.6	660	685	0.14
	0.8	510	745	0.16
T2	0.2	1320	620	0.22
	0.4	1205	695	0.22
	0.6	1060	745	0.25
	0.8	940	815	0.27
T3	0.2	1605	705	0.34
	0.4	1505	755	0.37
	0.6	1395	820	0.4
	0.8	1275	875	0.42
T4	0.2	1810	770	0.47
	0.4	1715	815	0.5
	0.6	1625	870	0.53
	0.8	1520	920	0.56
T5	0.2	1930	805	0.55
	0.4	1835	845	0.57
	0.6	1755	900	0.61
	0.8	1655	945	0.64

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

4 - Models: DHG0484D1
Standard Static Drive • Burners High Fire Input: 100,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	920	565	0.11
	0.4	760	655	0.13
	0.6	620	730	0.15
	0.8	480	795	0.16
T2	0.2	1405	715	0.31
	0.4	1305	775	0.33
	0.6	1190	840	0.36
	0.8	1075	905	0.39
T3	0.2	1515	750	0.36
	0.4	1420	805	0.39
	0.6	1315	870	0.42
	0.8	1205	930	0.45
T4	0.2	1710	820	0.5
	0.4	1620	865	0.53
	0.6	1535	925	0.56
	0.8	1435	975	0.59
T5	0.2	1820	855	0.58
	0.4	1730	900	0.61
	0.6	1655	955	0.65
	0.8	1560	1005	0.68

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	970	535	0.1
	0.4	805	620	0.12
	0.6	660	685	0.14
	0.8	510	745	0.16
T2	0.2	1490	670	0.29
	0.4	1385	730	0.31
	0.6	1260	790	0.34
	0.8	1140	850	0.36
T3	0.2	1605	705	0.34
	0.4	1505	755	0.37
	0.6	1395	820	0.4
	0.8	1275	875	0.42
T4	0.2	1810	770	0.47
	0.4	1715	815	0.5
	0.6	1625	870	0.53
	0.8	1520	920	0.56
T5	0.2	1930	805	0.55
	0.4	1835	845	0.57
	0.6	1755	900	0.61
	0.8	1655	945	0.64

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

5 - Models: DHG0601D8, DHG0603D8
Standard Static Drive • Burners High Fire Input: 80,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1110	615	0.16
	0.4	975	705	0.19
	0.6	845	775	0.21
	0.8	720	840	0.25
T2	0.2	1280	670	0.24
	0.4	1160	745	0.27
	0.6	1030	815	0.29
	0.8	920	880	0.31
T3	0.2	1895	865	0.62
	0.4	1810	920	0.66
	0.6	1720	965	0.69
	0.8	1640	1020	0.73
T4	0.2	1910	870	0.63
	0.4	1825	925	0.67
	0.6	1735	970	0.7
	0.8	1655	1020	0.74
T5	0.2	2145	955	0.91
	0.4	2065	990	0.94
	0.6	1980	1035	0.99
	0.8	1900	1075	1.02

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1160	595	0.17
	0.4	1020	685	0.18
	0.6	895	750	0.22
	0.8	765	815	0.23
T2	0.2	1345	650	0.23
	0.4	1220	725	0.26
	0.6	1080	790	0.28
	0.8	965	855	0.31
T3	0.2	1990	840	0.6
	0.4	1990	890	0.64
	0.6	1805	935	0.67
	0.8	1720	990	0.71
T4	0.2	2005	845	0.61
	0.4	1915	895	0.65
	0.6	1820	940	0.68
	0.8	1740	990	0.72
T5	0.2	2250	925	0.88
	0.4	2170	960	0.91
	0.6	2080	1005	0.96
	0.8	1995	1045	0.99

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

5 - Models: DHG0601D1, DHG0603D1
Standard Static Drive • Burners High Fire Input: 100,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1115	620	0.16
	0.4	985	700	0.19
	0.6	845	775	0.21
	0.8	725	840	0.24
T2	0.2	1400	705	0.29
	0.4	1290	780	0.32
	0.6	1170	845	0.35
	0.8	1065	910	0.38
T3	0.2	1895	865	0.62
	0.4	1810	920	0.66
	0.6	1720	965	0.69
	0.8	1640	1020	0.73
T4	0.2	1910	870	0.63
	0.4	1825	925	0.67
	0.6	1735	970	0.7
	0.8	1655	1020	0.74
T5	0.2	2145	955	0.91
	0.4	2065	990	0.94
	0.6	1980	1035	0.99
	0.8	1900	1075	1.02

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1170	600	0.16
	0.4	1030	685	0.18
	0.6	890	750	0.21
	0.8	765	815	0.23
T2	0.2	1470	685	0.29
	0.4	1355	755	0.31
	0.6	1230	820	0.34
	0.8	1120	885	0.37
T3	0.2	1990	840	0.6
	0.4	1900	890	0.64
	0.6	1805	935	0.67
	0.8	1720	990	0.71
T4	0.2	2005	845	0.61
	0.4	1915	895	0.65
	0.6	1820	940	0.68
	0.8	1740	990	0.72
T5	0.2	2250	925	0.88
	0.4	2170	960	0.91
	0.6	2080	1005	0.96
	0.8	1995	1045	0.99

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

5 - Models: DHG0604D8
Standard Static Drive • Burners High Fire Input: 80,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1045	590	0.16
	0.4	890	685	0.14
	0.6	770	755	0.21
	0.8	625	815	0.23
T2	0.2	1275	665	0.23
	0.4	1160	745	0.26
	0.6	1040	815	0.28
	0.8	910	875	0.3
T3	0.2	1930	890	0.64
	0.4	1850	935	0.67
	0.6	1770	985	0.7
	0.8	1685	1030	0.74
T4	0.2	1930	890	0.64
	0.4	1850	935	0.67
	0.6	1770	985	0.7
	0.8	1685	1030	0.74
T5	0.2	2165	960	0.91
	0.4	2085	1000	0.95
	0.6	2005	1035	0.99
	0.8	1935	1080	1.03

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1105	550	0.1
	0.4	940	640	0.17
	0.6	815	705	0.19
	0.8	655	785	0.21
T2	0.2	1355	625	0.22
	0.4	1230	700	0.24
	0.6	1100	765	0.26
	0.8	965	820	0.28
T3	0.2	2045	835	0.6
	0.4	1960	880	0.63
	0.6	1875	925	0.66
	0.8	1785	970	0.69
T4	0.2	2045	835	0.6
	0.4	1960	880	0.63
	0.6	1875	925	0.66
	0.8	1785	970	0.69
T5	0.2	2295	900	0.86
	0.4	2210	940	0.89
	0.6	2125	975	0.93
	0.8	2050	1015	0.97

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

5 - Models: DHG0604D1
Standard Static Drive • Burners High Fire Input: 100,000 BTU/hr

Down Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1130	620	0.18
	0.4	985	710	0.19
	0.6	865	780	0.23
	0.8	730	840	0.25
T2	0.2	1300	675	0.24
	0.4	1185	750	0.27
	0.6	1065	820	0.29
	0.8	940	880	0.31
T3	0.2	1930	890	0.64
	0.4	1850	935	0.67
	0.6	1770	985	0.7
	0.8	1685	1030	0.74
T4	0.2	1930	890	0.64
	0.4	1850	935	0.67
	0.6	1770	985	0.7
	0.8	1685	1030	0.74
T5	0.2	2165	960	0.91
	0.4	2085	1000	0.95
	0.6	2005	1035	0.99
	0.8	1935	1080	1.03

Horizontal Flow				
SPEED TAP	EXTERNAL STATIC PRESSURE (ESP) IN W. C.	STANDARD CFM	RPM	BHP
T1*	0.2	1195	580	0.15
	0.4	1045	665	0.19
	0.6	920	730	0.21
	0.8	770	795	0.23
T2	0.2	1380	635	0.23
	0.4	1255	705	0.25
	0.6	1130	770	0.27
	0.8	995	825	0.29
T3	0.2	2045	835	0.6
	0.4	1960	880	0.63
	0.6	1875	925	0.66
	0.8	1785	970	0.69
T4	0.2	2045	835	0.6
	0.4	1960	880	0.63
	0.6	1875	925	0.66
	0.8	1785	970	0.69
T5	0.2	2295	900	0.86
	0.4	2210	940	0.89
	0.6	2125	975	0.93
	0.8	2050	1015	0.97

* IN DHG0361D/DHG0363D/DHG0364D, DHG0481D/DHG0483D/DHG0484D, AND DHG0601D/DHG0603D/DHG0604D DOWNSHOT & HORIZONTAL TABLES, T1 VALUES ARE FOR FAN MODE OR PART LOAD ONLY

3 Ton - High-Static Drive Models: DHG0363W6, DHG0364W6, DHG0367W6
60,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP
T1C*	0.8	495	779	0.17
	1	385	843	0.18
	1.2			
	1.4			
	1.6			
	1.8			
	2			
T2C	0.8	848	836	0.22
	1	735	897	0.23
	1.2	608	949	0.25
	1.4	515	1002	0.26
	1.6	400	1042	0.27
	1.8			
	2			
T3C	0.8	1397	934	0.58
	1	1287	998	0.62
	1.2	1195	1047	0.65
	1.4	1108	1093	0.68
	1.6	1023	1147	0.71
	1.8	940	1190	0.74
	2	841	1233	0.76
T4C	0.8	1559	973	0.82
	1	1473	1021	0.85
	1.2	1365	1079	0.9
	1.4	1277	1125	0.94
	1.6	1195	1168	0.97
	1.8	1113	1221	1.02
	2	1044	1263	1.05
T5C	0.8	1632	1010	0.96
	1	1550	1055	1.01
	1.2	1468	1100	1.05
	1.4	1378	1148	1.09
	1.6	1298	1191	1.13
	1.8	1219	1232	1.17
	2	1139	1280	1.22

SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1'H*	0.8	848	836	0.22
	1	735	897	0.23
	1.2	608	949	0.25
	1.4	515	1002	0.26
	1.6	400	1042	0.27
	1.8			
	2			
T2'H	0.8	1190	895	0.56
	1	1085	950	0.58
	1.2	995	1005	0.63
	1.4	890	1060	0.66
	1.6	795	1105	0.69
	1.8	680	1150	0.7
	2	610	1195	0.74
T3'H	0.8	1223	901	0.56
	1	1119	957	0.59
	1.2	1028	1010	0.63
	1.4	925	1064	0.66
	1.6	832	1110	0.69
	1.8	722	1155	0.71
	2	647	1200	0.74
T4'H	0.8	1495	950	0.4
	1	1385	1015	0.43
	1.2	1290	1070	0.45
	1.4	1210	1115	0.47
	1.6	1125	1160	0.49
	1.8	1040	1205	0.5
	2	960	1245	0.52
T5'H	0.8	1632	1010	0.96
	1	1550	1055	1.01
	1.2	1468	1100	1.05
	1.4	1378	1148	1.09
	1.6	1298	1191	1.13
	1.8	1219	1232	1.17
	2	1139	1280	1.22

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP
T1C*	0.8	990	909	0.27
	1	876	978	0.29
	1.2	774	1033	0.31
	1.4	647	1087	0.32
	1.6	562	1140	0.34
	1.8	460	1182	0.35
	2			
T2C	0.8	1372	976	0.56
	1	1254	1041	0.59
	1.2	1159	1092	0.62
	1.4	1060	1155	0.66
	1.6	972	1201	0.69
	1.8	872	1249	0.71
	2	768	1291	0.74
T3C	0.8	1487	993	0.61
	1	1369	1062	0.66
	1.2	1271	1114	0.69
	1.4	1179	1163	0.72
	1.6	1088	1220	0.76
	1.8	1000	1266	0.78
	2	895	1312	0.81
T4C	0.8	1622	1050	0.88
	1	1537	1099	0.92
	1.2	1452	1148	0.96
	1.4	1359	1197	1
	1.6	1272	1243	1.04
	1.8	1184	1299	1.08
	2	1111	1344	1.12
T5C	0.8			
	1	1635	1129	1.07
	1.2	1550	1176	1.12
	1.4	1466	1222	1.16
	1.6	1380	1267	1.21
	1.8	1297	1310	1.25
	2	1212	1361	1.3

SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1'H*	0.8	865	889	0.23
	1	750	954	0.25
	1.2	620	1010	0.26
	1.4	526	1066	0.28
	1.6	408	1109	0.29
	1.8			
	2			
T2'H	0.8	1200	950	0.59
	1	1095	1010	0.62
	1.2	1005	1065	0.67
	1.4	895	1125	0.7
	1.6	800	1175	0.72
	1.8	685	1220	0.76
	2	615	1270	0.79
T3'H	0.8	1248	958	0.59
	1	1142	1019	0.63
	1.2	1049	1075	0.67
	1.4	944	1132	0.7
	1.6	849	1181	0.73
	1.8	737	1229	0.76
	2	660	1277	0.79
T4'H	0.8			
	1	1475	1080	0.45
	1.2	1375	1135	0.48
	1.4	1285	1185	0.49
	1.6	1195	1235	0.51
	1.8	1110	1285	0.53
	2	1020	1325	0.55
T5'H	0.8			
	1	1635	1129	1.07
	1.2	1550	1176	1.12
	1.4	1466	1222	1.16
	1.6	1380	1267	1.21
	1.8	1297	1310	1.25
	2	1212	1361	1.3

* IN DHG0363W/DHG0364W/DHG0367W, DHG0483W/DHG0484W/DHG0487W AND DHG0603W/DHG0604W/DHG0607W DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

3 Ton - High-Static Drive Models: DHG0363W8, DHG0364W8, DHG0367W8
80,000 BTU

Down Flow

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP
T1C*	0.8	495	779	0.17
	1	385	843	0.18
	1.2			
	1.4			
	1.6			
	1.8			
	2			
T2C	0.8	848	836	0.22
	1	735	897	0.23
	1.2	608	949	0.25
	1.4	515	1002	0.26
	1.6	400	1042	0.27
	1.8			
	2			
T3C	0.8	1397	934	0.58
	1	1287	998	0.62
	1.2	1195	1047	0.65
	1.4	1108	1093	0.68
	1.6	1023	1147	0.71
	1.8	940	1190	0.74
	2	841	1233	0.76
T4C	0.8	1559	973	0.82
	1	1473	1021	0.85
	1.2	1365	1079	0.9
	1.4	1277	1125	0.94
	1.6	1195	1168	0.97
	1.8	1113	1221	1.02
	2	1044	1263	1.05
T5C	0.8	1632	1010	0.96
	1	1550	1055	1.01
	1.2	1468	1100	1.05
	1.4	1378	1148	1.09
	1.6	1298	1191	1.13
	1.8	1219	1232	1.17
	2	1139	1280	1.22

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
T1'H*	0.8	1050	870	0.54
	1	950	915	0.56
	1.2	860	975	0.61
	1.4	740	1035	0.64
	1.6	640	1075	0.67
	1.8	505	1120	0.68
	2	455	1165	0.72
T2'H	0.8	1275	910	0.44
	1	1165	980	0.48
	1.2	1080	1020	0.5
	1.4	985	1065	0.53
	1.6	900	1130	0.55
	1.8	815	1170	0.62
	2	695	1220	0.58
T3'H	0.8	1230	905	0.39
	1	1120	970	0.43
	1.2	1035	1010	0.44
	1.4	1198	1055	0.47
	1.6	1113	1125	0.49
	1.8	1031	1160	0.52
	2	947	1210	0.52
T4'H	0.8			
	1			
	1.2	1270	1060	0.77
	1.4	1185	1105	0.81
	1.6	1100	1145	0.83
	1.8	1020	1210	0.89
	2	960	1250	0.9
T5'H	0.8	1632	1010	0.96
	1	1550	1055	1.01
	1.2	1468	1100	1.05
	1.4	1378	1148	1.09
	1.6	1298	1191	1.13
	1.8	1219	1232	1.17
	2	1139	1280	1.22

Horizontal

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP
T1C*	0.8	505	828	0.18
	1	392	897	0.19
	1.2			
	1.4			
	1.6			
	1.8			
	2			
T2C	0.8	865	889	0.23
	1	750	954	0.25
	1.2	620	1010	0.26
	1.4	526	1066	0.28
	1.6	408	1109	0.29
	1.8			
	2			
T3C	0.8	1487	993	0.61
	1	1369	1062	0.66
	1.2	1271	1114	0.69
	1.4	1179	1163	0.72
	1.6	1088	1220	0.76
	1.8	1000	1266	0.78
	2	895	1312	0.81
T4C	0.8	1622	1050	0.88
	1	1537	1099	0.92
	1.2	1452	1148	0.96
	1.4	1359	1197	1
	1.6	1272	1243	1.04
	1.8	1184	1299	1.08
	2	1111	1344	1.12
T5C	0.8			
	1	1635	1129	1.07
	1.2	1550	1176	1.12
	1.4	1466	1222	1.16
	1.6	1380	1267	1.21
	1.8	1297	1310	1.25
	2	1212	1361	1.3

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
T1'H*	0.8	1010	925	0.57
	1	915	975	0.6
	1.2	825	1035	0.65
	1.4	710	1100	0.68
	1.6	610	1140	0.7
	1.8	475	1190	0.74
	2	425	1240	0.77
T2'H	0.8			
	1	1240	1040	0.51
	1.2	1145	1085	0.52
	1.4	1045	1135	0.56
	1.6	955	1205	0.6
	1.8	870	1245	0.59
	2	740	1295	0.63
T3'H	0.8			
	1	1190	1035	0.45
	1.2	1100	1075	0.46
	1.4	1000	1125	0.5
	1.6	910	1200	0.54
	1.8	820	1235	0.52
	2	685	1290	0.57
T4'H	0.8			
	1			
	1.2			
	1.4	1265	1175	0.86
	1.6	1175	1220	0.89
	1.8	1080	1290	0.93
	2	1020	1330	0.96
T5'H	0.8			
	1	1635	1129	1.07
	1.2	1550	1176	1.12
	1.4	1466	1222	1.16
	1.6	1380	1267	1.21
	1.8	1297	1310	1.25
	2	1212	1361	1.3

* IN DHG0363W/DHG0364W/DHG0367W, DHG0483W/DHG0484W/DHG0487W AND DHG0603W/DHG0604W/DHG0607W DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

3 Ton - High-Static Drive Models: DHG0363W1, DHG0364W1, DHG0367W1
100,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1C*	0.8	495	779	0.17	T1'H*	0.8	1223	901	0.56
	1	385	843	0.18		1	1119	957	0.59
	1.2					1.2	1028	1010	0.63
	1.4					1.4	925	1064	0.66
	1.6					1.6	832	1110	0.69
	1.8					1.8	722	1155	0.71
	2					2	647	1200	0.74
T2C	0.8	848	836	0.22	T2'H	0.8	1397	934	0.58
	1	735	897	0.23		1	1287	998	0.62
	1.2	608	949	0.25		1.2	1195	1047	0.65
	1.4	515	1002	0.26		1.4	1108	1093	0.68
	1.6	400	1042	0.27		1.6	1023	1147	0.71
	1.8					1.8	940	1190	0.74
	2					2	841	1233	0.76
T3C	0.8	1397	934	0.58	T3'H	0.8	1486	950	0.68
	1	1287	998	0.62		1	1376	1012	0.72
	1.2	1195	1047	0.65		1.2	1280	1066	0.76
	1.4	1108	1093	0.68		1.4	1198	1112	0.79
	1.6	1023	1147	0.71		1.6	1113	1158	0.83
	1.8	940	1190	0.74		1.8	1031	1205	0.86
	2	841	1233	0.76		2	947	1244	0.89
T4C	0.8	1559	973	0.82	T4'H	0.8	1559	973	0.82
	1	1473	1021	0.85		1	1473	1021	0.85
	1.2	1365	1079	0.9		1.2	1365	1079	0.9
	1.4	1277	1125	0.94		1.4	1277	1125	0.94
	1.6	1195	1168	0.97		1.6	1195	1168	0.97
	1.8	1113	1221	1.02		1.8	1113	1221	1.02
	2	1044	1263	1.05		2	1044	1263	1.05
T5C	0.8	1632	1010	0.96	T5'H	0.8	1632	1010	0.96
	1	1550	1055	1.01		1	1550	1055	1.01
	1.2	1468	1100	1.05		1.2	1468	1100	1.05
	1.4	1378	1148	1.09		1.4	1378	1148	1.09
	1.6	1298	1191	1.13		1.6	1298	1191	1.13
	1.8	1219	1232	1.17		1.8	1219	1232	1.17
	2	1139	1280	1.22		2	1139	1280	1.22

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1C*	0.8	505	828	0.18	T1'H*	0.8	1248	958	0.59
	1	392	897	0.19		1	1142	1019	0.63
	1.2					1.2	1049	1075	0.67
	1.4					1.4	944	1132	0.7
	1.6					1.6	849	1181	0.73
	1.8					1.8	737	1229	0.76
	2					2	660	1277	0.79
T2C	0.8	865	889	0.23	T2'H	0.8	1487	993	0.61
	1	750	954	0.25		1	1369	1062	0.66
	1.2	620	1010	0.26		1.2	1271	1114	0.69
	1.4	526	1066	0.28		1.4	1179	1163	0.72
	1.6	408	1109	0.29		1.6	1088	1220	0.76
	1.8					1.8	1000	1266	0.78
	2					2	895	1312	0.81
T3C	0.8	1487	993	0.61	T3'H	0.8			
	1	1369	1062	0.66		1	1464	1077	0.77
	1.2	1271	1114	0.69		1.2	1362	1134	0.81
	1.4	1179	1163	0.72		1.4	1275	1183	0.84
	1.6	1088	1220	0.76		1.6	1184	1232	0.88
	1.8	1000	1266	0.78		1.8	1096	1282	0.92
	2	895	1312	0.81		2	1007	1323	0.94
T4C	0.8	1622	1050	0.88	T4'H	0.8	1622	1050	0.88
	1	1537	1099	0.92		1	1537	1099	0.92
	1.2	1452	1148	0.96		1.2	1452	1148	0.96
	1.4	1359	1197	1		1.4	1359	1197	1
	1.6	1272	1243	1.04		1.6	1272	1243	1.04
	1.8	1184	1299	1.08		1.8	1184	1299	1.08
	2	1111	1344	1.12		2	1111	1344	1.12
T5C	0.8				T5'H	0.8			
	1	1635	1129	1.07		1	1635	1129	1.07
	1.2	1550	1176	1.12		1.2	1550	1176	1.12
	1.4	1466	1222	1.16		1.4	1466	1222	1.16
	1.6	1380	1267	1.21		1.6	1380	1267	1.21
	1.8	1297	1310	1.25		1.8	1297	1310	1.25
	2	1212	1361	1.3		2	1212	1361	1.3

* IN DHG0363W/DHG0364W/DHG0367W, DHG0483W/DHG0484W/DHG0487W AND DHG0603W/DHG0604W/DHG0607W DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

4 Ton - High-Static Drive Models: DHG0483W8, DHG0484W8, DHG0487W8
80,000 BTU

Down Flow

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP
T1C*	0.8	1092	875	0.37
	1	1007	927	0.4
	1.2	880	991	0.42
	1.4	789	1042	0.45
	1.6	692	1090	0.47
	1.8	612	1134	0.49
	2	509	1191	0.52
T2C	0.8	1510	927	0.56
	1	1369	995	0.6
	1.2	1285	1040	0.63
	1.4	1202	1085	0.66
	1.6	1130	1133	0.69
	1.8	1044	1178	0.71
	2	918	1233	0.75
T3C	0.8	1782	993	0.77
	1	1711	1034	0.8
	1.2	1576	1102	0.85
	1.4	1494	1143	0.88
	1.6	1419	1183	0.91
	1.8	1349	1225	0.95
	2	1282	1266	0.98
T4C	0.8	1921	1026	0.89
	1	1848	1066	0.93
	1.2	1742	1123	0.98
	1.4	1640	1174	1.02
	1.6	1580	1214	1.05
	1.8	1504	1251	1.09
	2	1440	1289	1.12
T5C	0.8	2064	1053	1
	1	1978	1096	1.04
	1.2	1909	1136	1.08
	1.4	1786	1196	1.14
	1.6	1698	1239	1.18
	1.8	1622	1277	1.22
	2	1550	1311	1.25

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
T1'H*	0.8	1092	875	0.37
	1	1007	927	0.4
	1.2	880	991	0.42
	1.4	789	1042	0.45
	1.6	692	1090	0.47
	1.8	612	1134	0.49
	2	509	1191	0.52
T2'H	0.8	1275	870	0.38
	1	1075	960	0.43
	1.2	1035	985	0.44
	1.4	950	1035	0.47
	1.6	885	1090	0.5
	1.8	785	1140	0.5
	2	605	1205	0.55
T3'H	0.8	1365	895	0.41
	1	1300	940	0.41
	1.2	1080	1040	0.46
	1.4	1055	1050	0.46
	1.6	935	1090	0.49
	1.8	885	1145	0.53
	2	810	1195	0.56
T4'H	0.8	1921	1026	0.89
	1	1848	1066	0.93
	1.2	1742	1123	0.98
	1.4	1640	1174	1.02
	1.6	1580	1214	1.05
	1.8	1504	1251	1.09
	2	1440	1289	1.12
T5'H	0.8	2064	1053	1
	1	1978	1096	1.04
	1.2	1909	1136	1.08
	1.4	1786	1196	1.14
	1.6	1698	1239	1.18
	1.8	1622	1277	1.22
	2	1550	1311	1.25

Horizontal

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP
T1C*	0.8	1114	931	0.4
	1	1028	986	0.42
	1.2	898	1054	0.45
	1.4	805	1109	0.48
	1.6	706	1160	0.5
	1.8	624	1206	0.52
	2	519	1266	0.55
T2C	0.8	1541	987	0.6
	1	1397	1058	0.64
	1.2	1311	1106	0.67
	1.4	1227	1154	0.7
	1.6	1153	1205	0.73
	1.8	1065	1253	0.76
	2	937	1312	0.8
T3C	0.8	1818	1056	0.82
	1	1746	1100	0.85
	1.2	1608	1172	0.91
	1.4	1524	1216	0.94
	1.6	1448	1258	0.97
	1.8	1377	1303	1.01
	2	1308	1347	1.04
T4C	0.8	1960	1092	0.95
	1	1886	1134	0.99
	1.2	1778	1195	1.04
	1.4	1673	1249	1.09
	1.6	1612	1291	1.12
	1.8	1535	1331	1.16
	2	1469	1371	1.19
T5C	0.8	2131	1115	1.06
	1	2040	1161	1.1
	1.2	1948	1208	1.15
	1.4	1822	1272	1.21
	1.6	1733	1318	1.25
	1.8	1655	1358	1.29
	2	1582	1395	1.33

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
T1'H*	0.8	1114	931	0.4
	1	1028	986	0.42
	1.2	898	1054	0.45
	1.4	805	1109	0.48
	1.6	706	1160	0.5
	1.8	624	1206	0.52
	2	519	1266	0.55
T2'H	0.8	1305	930	0.41
	1	1100	1020	0.46
	1.2	1055	1050	0.46
	1.4	970	1100	0.49
	1.6	900	1160	0.52
	1.8	800	1210	0.55
	2	620	1280	0.59
T3'H	0.8	1390	950	0.43
	1	1325	1000	0.43
	1.2	1100	1105	0.52
	1.4	1075	1115	0.49
	1.6	955	1160	0.52
	1.8	905	1220	0.56
	2	825	1275	0.59
T4'H	0.8	1960	1092	0.95
	1	1886	1134	0.99
	1.2	1778	1195	1.04
	1.4	1673	1249	1.09
	1.6	1612	1291	1.12
	1.8	1535	1331	1.16
	2	1469	1371	1.19
T5'H	0.8	2131	1115	1.06
	1	2040	1161	1.1
	1.2	1948	1208	1.15
	1.4	1822	1272	1.21
	1.6	1733	1318	1.25
	1.8	1655	1358	1.29
	2	1582	1395	1.33

* IN DHG0363W/DHG0364W/DHG0367W, DHG0483W/DHG0484W/DHG0487W AND DHG0603W/DHG0604W/DHG0607W DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

4 Ton - High-Static Drive Models: DHG0483W1, DHG0484W1, DHG0487W1
100,000 BTU

Down Flow

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1C*	0.8	1092	875	0.37	T1'H*	0.8	1092	875	0.37
	1	1007	927	0.4		1	1007	927	0.4
	1.2	880	991	0.42		1.2	880	991	0.42
	1.4	789	1042	0.45		1.4	789	1042	0.45
	1.6	692	1090	0.47		1.6	692	1090	0.47
	1.8	612	1134	0.49		1.8	612	1134	0.49
	2	509	1191	0.52		2	509	1191	0.52
T2C	0.8	1510	927	0.56	T2'H	0.8	1335	885	0.43
	1	1369	995	0.6		1	1150	970	0.47
	1.2	1285	1040	0.63		1.2	1100	1000	0.49
	1.4	1202	1085	0.66		1.4	1015	1050	0.52
	1.6	1130	1133	0.69		1.6	945	1100	0.55
	1.8	1044	1178	0.71		1.8	850	1150	0.56
	2	918	1233	0.75		2	685	1210	0.6
T3C	0.8	1782	993	0.77	T3'H	0.8	1365	895	0.41
	1	1711	1034	0.8		1	1300	940	0.41
	1.2	1576	1102	0.85		1.2	1080	1040	0.46
	1.4	1494	1143	0.88		1.4	1055	1050	0.46
	1.6	1419	1183	0.91		1.6	935	1090	0.49
	1.8	1349	1225	0.95		1.8	885	1145	0.53
	2	1282	1266	0.98		2	810	1195	0.56
T4C	0.8	1921	1026	0.89	T4'H	0.8	1921	1026	0.89
	1	1848	1066	0.93		1	1848	1066	0.93
	1.2	1742	1123	0.98		1.2	1742	1123	0.98
	1.4	1640	1174	1.02		1.4	1640	1174	1.02
	1.6	1580	1214	1.05		1.6	1580	1214	1.05
	1.8	1504	1251	1.09		1.8	1504	1251	1.09
	2	1440	1289	1.12		2	1440	1289	1.12
T5C	0.8	2064	1053	1	T5'H	0.8	2064	1053	1
	1	1978	1096	1.04		1	1978	1096	1.04
	1.2	1909	1136	1.08		1.2	1909	1136	1.08
	1.4	1786	1196	1.14		1.4	1786	1196	1.14
	1.6	1698	1239	1.18		1.6	1698	1239	1.18
	1.8	1622	1277	1.22		1.8	1622	1277	1.22
	2	1550	1311	1.25		2	1550	1311	1.25

Horizontal

SPEED TAP	External Static Pressure (ESP). in w.c.	SCFM	RPM	BHP	SPEED TAP	External Static Pressure (ESP).	SCFM	RPM	BHP
T1C*	0.8	1114	931	0.4	T1'H*	0.8	1114	931	0.4
	1	1028	986	0.42		1	1028	986	0.42
	1.2	898	1054	0.45		1.2	898	1054	0.45
	1.4	805	1109	0.48		1.4	805	1109	0.48
	1.6	706	1160	0.5		1.6	706	1160	0.5
	1.8	624	1206	0.52		1.8	624	1206	0.52
	2	519	1266	0.55		2	519	1266	0.55
T2C	0.8	1541	987	0.6	T2'H	0.8	1365	945	0.46
	1	1397	1058	0.64		1	1175	1030	0.51
	1.2	1311	1106	0.67		1.2	1120	1065	0.52
	1.4	1227	1154	0.7		1.4	1035	1115	0.55
	1.6	1153	1205	0.73		1.6	965	1170	0.58
	1.8	1065	1253	0.76		1.8	865	1220	0.6
	2	937	1312	0.8		2	700	1290	0.65
T3C	0.8	1818	1056	0.82	T3'H	0.8	1390	950	0.43
	1	1746	1100	0.85		1	1325	1000	0.43
	1.2	1608	1172	0.91		1.2	1100	1105	0.52
	1.4	1524	1216	0.94		1.4	1075	1115	0.49
	1.6	1448	1258	0.97		1.6	955	1160	0.52
	1.8	1377	1303	1.01		1.8	905	1220	0.56
	2	1308	1347	1.04		2	825	1275	0.59
T4C	0.8	1960	1092	0.95	T4'H	0.8	1960	1092	0.95
	1	1886	1134	0.99		1	1886	1134	0.99
	1.2	1778	1195	1.04		1.2	1778	1195	1.04
	1.4	1673	1249	1.09		1.4	1673	1249	1.09
	1.6	1612	1291	1.12		1.6	1612	1291	1.12
	1.8	1535	1331	1.16		1.8	1535	1331	1.16
	2	1469	1371	1.19		2	1469	1371	1.19
T5C	0.8	2131	1115	1.06	T5'H	0.8	2131	1115	1.06
	1	2040	1161	1.1		1	2040	1161	1.1
	1.2	1948	1208	1.15		1.2	1948	1208	1.15
	1.4	1822	1272	1.21		1.4	1822	1272	1.21
	1.6	1733	1318	1.25		1.6	1733	1318	1.25
	1.8	1655	1358	1.29		1.8	1655	1358	1.29
	2	1582	1395	1.33		2	1582	1395	1.33

* IN DHG0363W/DHG0364W/DHG0367W, DHG0483W/DHG0484W/DHG0487W AND DHG0603W/DHG0604W/DHG0607W DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

5 Ton - High-Static Drive Models: DHG0603W8,DHG0604W8, DHG0607W8
80,000 BTU

Down Flow

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP	SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
	0.8	819	806	0.23		0.8	819	806	0.23
	1	680	873	0.25		1	680	873	0.25
	1.2	584	929	0.27		1.2	584	929	0.27
T1C*	1.4				T1'H*	1.4			
	1.6					1.6			
	1.8					1.8			
	2					2			
	0.8	1551	930	1		0.8	1495	920	0.52
	1	1455	980	1.05		1	1400	970	0.55
	1.2	1367	1033	1.11		1.2	1315	1025	0.58
T2C	1.4	1290	1080	1.16	T2'H	1.4	1235	1070	0.61
	1.6	1213	1126	1.21		1.6	1155	1120	0.64
	1.8	1136	1172	1.26		1.8	1050	1175	0.67
	2	1079	1205	1.29		2	975	1215	0.69
	0.8	1098	1052	0.7		0.8	1595	940	0.6
	1	2036	1095	0.73		1	1510	990	0.63
	1.2	1971	1136	0.76		1.2	1420	1040	0.66
T3C	1.4	1887	1180	0.79	T3'H	1.4	1345	1090	0.69
	1.6	1805	1221	0.81		1.6	1260	1140	0.72
	1.8	1755	1252	0.83		1.8	1155	1190	0.75
	2	1660	1305	0.87		2	1085	1230	0.78
	0.8	2236	1094	0.89		0.8	1760	970	0.68
	1	2175	1133	0.92		1	1690	1015	0.72
	1.2	2117	1171	0.95		1.2	1595	1065	0.75
T4C	1.4	2048	1211	0.98	T4'H	1.4	1500	1115	0.79
	1.6	1958	1252	1.01		1.6	1430	1160	0.83
	1.8	1880	1293	1.05		1.8	1340	1205	0.86
	2	1843	1321	1.07		2	1310	1245	0.89
	0.8	2446	1157	1.46		0.8	2446	1157	1.46
	1	2390	1193	1.5		1	2390	1193	1.5
	1.2	2331	1230	1.55		1.2	2331	1230	1.55
T5C	1.4	2273	1266	1.6	T5'H	1.4	2273	1266	1.6
	1.6	2207	1303	1.64		1.6	2207	1303	1.64
	1.8	2116	1351	1.7		1.8	2116	1351	1.7
	2	2037	1390	1.75		2	2037	1390	1.75

Horizontal

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP	SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
	0.8	836	857	0.24		0.8	836	857	0.24
	1	694	929	0.27		1	694	929	0.27
	1.2	596	989	0.28		1.2	596	989	0.28
T1C*	1.4				T1'H*	1.4			
	1.6					1.6			
	1.8					1.8			
	2					2			
	0.8	1583	989	0.59		0.8	1525	980	0.55
	1	1485	1043	0.62		1	1430	1035	0.59
	1.2	1395	1099	0.65		1.2	1340	1090	0.62
T2C	1.4	1316	1149	0.68	T2'H	1.4	1260	1140	0.65
	1.6	1238	1198	0.71		1.6	1180	1195	0.68
	1.8	1159	1247	0.74		1.8	1070	1250	0.71
	2	1101	1282	0.76		2	995	1290	0.73
	0.8	2141	1119	1.07		0.8	1630	1000	0.63
	1	2078	1165	1.11		1	1540	1055	0.67
	1.2	2011	1208	1.15		1.2	1450	1110	0.7
T3C	1.4	1925	1255	1.19	T3'H	1.4	1370	1160	0.74
	1.6	1842	1299	1.24		1.6	1285	1210	0.77
	1.8	1791	1332	1.27		1.8	1180	1265	0.8
	2	1694	1388	1.32		2	1105	1310	0.83
	0.8	2282	1164	1.25		0.8	1795	1035	0.72
	1	2219	1205	1.29		1	1725	1080	0.76
	1.2	2160	1246	1.33		1.2	1630	1135	0.8
T4C	1.4	2090	1288	1.38	T4'H	1.4	1530	1185	0.84
	1.6	1998	1332	1.43		1.6	1460	1235	0.87
	1.8	1918	1376	1.47		1.8	1370	1285	0.9
	2	1881	1405	1.5		2	1340	1325	0.94
	0.8	2496	1231	1.55		0.8	2496	1231	1.55
	1	2439	1269	1.6		1	2439	1269	1.6
	1.2	2379	1308	1.65		1.2	2379	1308	1.65
T5C	1.4	2319	1347	1.7	T5'H	1.4	2319	1347	1.7
	1.6	2252	1386	1.75		1.6	2252	1386	1.75
	1.8	2159	1437	1.81		1.8	2159	1437	1.81
	2	2079	1479	1.87		2	2079	1479	1.87

* IN DHG0363W/DHG0364W/DHG0367W, DHG0483W/DHG0484W/DHG0487W AND DHG0603W/DHG0604W/DHG0607W DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

5 Ton - High-Static Drive Models: DHG0603W1, DHG0604W1, DHG0607W1
100,000 BTU

Down Flow

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP
T1C*	0.8	819	806	0.23
	1	680	873	0.25
	1.2	584	929	0.27
	1.4			
	1.6			
	1.8			
	2			
T2C	0.8	1551	930	1
	1	1455	980	1.05
	1.2	1367	1033	1.11
	1.4	1290	1080	1.16
	1.6	1213	1126	1.21
	1.8	1136	1172	1.26
	2	1079	1205	1.29
T3C	0.8	1098	1052	0.7
	1	2036	1095	0.73
	1.2	1971	1136	0.76
	1.4	1887	1180	0.79
	1.6	1805	1221	0.81
	1.8	1755	1252	0.83
	2	1660	1305	0.87
T4C	0.8	2236	1094	0.89
	1	2175	1133	0.92
	1.2	2117	1171	0.95
	1.4	2048	1211	0.98
	1.6	1958	1252	1.01
	1.8	1880	1293	1.05
	2	1843	1321	1.07
T5C	0.8	2446	1157	1.46
	1	2390	1193	1.5
	1.2	2331	1230	1.55
	1.4	2273	1266	1.6
	1.6	2207	1303	1.64
	1.8	2116	1351	1.7
	2	2037	1390	1.75

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
T1'H*	0.8	819	806	0.23
	1	680	873	0.25
	1.2	584	929	0.27
	1.4			
	1.6			
	1.8			
	2			
T2'H	0.8	1475	916	0.51
	1	1379	967	0.54
	1.2	1293	1021	0.57
	1.4	1218	1068	0.6
	1.6	1134	1120	0.63
	1.8	1017	1173	0.66
	2	938	1218	0.68
T3'H	0.8	1595	940	0.6
	1	1510	990	0.63
	1.2	1420	1040	0.66
	1.4	1345	1090	0.69
	1.6	1260	1140	0.72
	1.8	1155	1190	0.75
	2	1085	1230	0.78
T4'H	0.8	1760	970	0.68
	1	1690	1015	0.72
	1.2	1595	1065	0.75
	1.4	1500	1115	0.79
	1.6	1430	1160	0.83
	1.8	1340	1205	0.86
	2	1310	1245	0.89
T5'H	0.8	2446	1157	1.46
	1	2390	1193	1.5
	1.2	2331	1230	1.55
	1.4	2273	1266	1.6
	1.6	2207	1303	1.64
	1.8	2116	1351	1.7
	2	2037	1390	1.75

Horizontal

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP). IN W.C.	SCFM	RPM	BHP
T1C*	0.8	836	857	0.24
	1	694	929	0.27
	1.2	596	989	0.28
	1.4			
	1.6			
	1.8			
	2			
T2C	0.8	1583	989	0.59
	1	1485	1043	0.62
	1.2	1395	1099	0.65
	1.4	1316	1149	0.68
	1.6	1238	1198	0.71
	1.8	1159	1247	0.74
	2	1101	1282	0.76
T3C	0.8	2141	1119	1.07
	1	2078	1165	1.11
	1.2	2011	1208	1.15
	1.4	1925	1255	1.19
	1.6	1842	1299	1.24
	1.8	1791	1332	1.27
	2	1694	1388	1.32
T4C	0.8	2282	1164	1.25
	1	2219	1205	1.29
	1.2	2160	1246	1.33
	1.4	2090	1288	1.38
	1.6	1998	1332	1.43
	1.8	1918	1376	1.47
	2	1881	1405	1.5
T5C	0.8	2496	1231	1.55
	1	2439	1269	1.6
	1.2	2379	1308	1.65
	1.4	2319	1347	1.7
	1.6	2252	1386	1.75
	1.8	2159	1437	1.81
	2	2079	1479	1.87

SPEED TAP	EXTERNAL STATIC PRESSURE (ESP).	SCFM	RPM	BHP
T1'H*	0.8	836	857	0.24
	1	694	929	0.27
	1.2	596	989	0.28
	1.4			
	1.6			
	1.8			
	2			
T2'H	0.8	1505	974	0.54
	1	1407	1029	0.58
	1.2	1319	1086	0.61
	1.4	1243	1136	0.64
	1.6	1157	1191	0.67
	1.8	1038	1248	0.7
	2	957	1296	0.72
T3'H	0.8	1630	1000	0.63
	1	1540	1055	0.67
	1.2	1450	1110	0.7
	1.4	1370	1160	0.74
	1.6	1285	1210	0.77
	1.8	1180	1265	0.8
	2	1105	1310	0.83
T4'H	0.8	1795	1035	0.72
	1	1725	1080	0.76
	1.2	1630	1135	0.8
	1.4	1530	1185	0.84
	1.6	1460	1235	0.87
	1.8	1370	1285	0.9
	2	1340	1325	0.94
T5'H	0.8	2496	1231	1.55
	1	2439	1269	1.6
	1.2	2379	1308	1.65
	1.4	2319	1347	1.7
	1.6	2252	1386	1.75
	1.8	2159	1437	1.81
	2	2079	1479	1.87

* IN DHG0363W/DHG0364W/DHG0367W, DHG0483W/DHG0484W/DHG0487W AND DHG0603W/DHG0604W/DHG0607W DOWNSHOT & HORIZONTAL TABLES, T1C AND T1'H VALUES ARE FOR FAN MODE OR PART LOAD ONLY

3 Ton Models: DHG0363D, DHG0364D & DHG0367D with DDC Control • Standard Static • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
600							721	22	0.16	812	26	0.22	886	28	0.27
800	526	22	0.11	656	24	0.16	761	28	0.23	852	31	0.31	924	32	0.37
1000	590	26	0.16	705	30	0.22	802	33	0.32	891	37	0.43	962	35	0.51
1200	653	31	0.24	754	36	0.32	842	39	0.45	930	42	0.59	1000	39	0.70
1400	717	35	0.35	804	42	0.46	883	45	0.64	970	48	0.81	1038	42	0.96
1500	749	38	0.42	828	45	0.55	903	48	0.76	989	51	0.95	1057	44	1.13

Shaded area indicates air flow below 900 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
600							763	22	0.17	861	25	0.23	939	28	0.29
800	553	21	0.11	685	23	0.17	806	27	0.24	902	31	0.32	979	34	0.38
1000	619	26	0.17	749	29	0.23	848	33	0.33	943	36	0.43	1018	39	0.50
1200	686	30	0.25	812	35	0.33	890	39	0.46	984	42	0.58	1057	44	0.66
1400	753	35	0.37	875	41	0.46	933	44	0.63	1025	47	0.78	1097	50	0.88
1500	786	37	0.46	907	44	0.55	954	47	0.74	1045	50	0.90	1117	52	1.01

Shaded area indicates air flow below 900 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

3 Ton Models: DHG0363W, DHG0364W & DHG0367W with DDC Control • High Static • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
600							702	24	0.13	794	28	0.17	876	32	0.21
800	498	22	0.10	628	26	0.12	740	32	0.18	829	36	0.23	910	41	0.28
1000	556	31	0.12	673	34	0.17	778	40	0.25	864	44	0.31	944	50	0.37
1200	613	40	0.15	718	42	0.25	816	49	0.35	899	53	0.42	978	60	0.50
1400	670	49	0.19	764	50	0.34	853	57	0.49	934	61	0.57	1012	69	0.68
1500	699	54	0.21	786	54	0.41	872	61	0.58	951	65	0.66	1029	74	0.79
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
600	944	30	0.24	1015	36	0.30	1076	42	0.37	1139	40	0.46	1193	53	0.52
800	980	43	0.33	1049	48	0.43	1109	55	0.51	1169	56	0.63	1225	66	0.71
1000	1016	56	0.47	1082	61	0.60	1141	67	0.70	1200	71	0.87	1258	79	0.96
1200	1052	69	0.66	1116	74	0.84	1174	79	0.97	1231	87	1.20			
1400	1088	82	0.92	1150	87	1.19									
1500	1106	89	1.10												

Shaded area indicates air flow below 900 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
600				629	23	0.10	752	24	0.13	845	27	0.18	929	32	0.23
800	527	24	0.09	670	28	0.13	786	31	0.17	878	34	0.24	963	40	0.30
1000	585	29	0.12	711	33	0.17	821	38	0.23	912	42	0.31	997	47	0.40
1200	644	35	0.17	752	38	0.22	856	45	0.30	946	49	0.42	1031	55	0.53
1400	702	40	0.23	792	43	0.29	890	52	0.40	979	56	0.55	1065	62	0.70
1500	732	43	0.27	813	45	0.33	908	55	0.46	996	60	0.63	1082	66	0.80
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
600	1006	31	0.25	1076	35	0.31	1141	41	0.39	1208	39	0.45	1264	46	0.55
800	1038	41	0.34	1109	46	0.42	1173	52	0.53	1238	53	0.60	1296	60	0.73
1000	1071	51	0.45	1141	58	0.57	1205	64	0.72	1268	67	0.79	1328	74	0.96
1200	1103	62	0.61	1174	70	0.76	1237	75	0.97	1297	81	1.05	1359	87	1.27
1400	1136	72	0.83	1206	81	1.03	1269	86	1.31						
1500	1152	77	0.96	1222	87	1.20									

Shaded area indicates air flow below 900 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

4 Ton Models: DHG0483D, DHG0484D & DHG0487D with DDC Control • Standard Static • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
800	524	24	0.10	658	31	0.16	763	35	0.21	853	40	0.27	931	44	0.33
1000	588	32	0.15	708	38	0.21	807	42	0.28	892	47	0.35	968	50	0.41
1200	652	41	0.20	757	45	0.29	850	50	0.37	930	53	0.46	1005	57	0.53
1400	716	49	0.29	807	53	0.39	893	57	0.48	969	60	0.60	1043	63	0.67
1600	781	57	0.40	857	60	0.52	936	64	0.64	1008	67	0.77	1080	70	0.85
1800	845	65	0.57	906	68	0.71	979	71	0.85	1047	74	1.00	1117	76	1.08
2000	909	73	0.79	956	75	0.96	1023	78	1.12						

Shaded area indicates air flow below 1200 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
800	551	24	0.11	695	30	0.16	807	35	0.22	903	39	0.27	986	43	0.34
1000	618	32	0.16	747	37	0.21	853	42	0.29	943	46	0.35	1025	50	0.43
1200	685	40	0.22	798	45	0.27	898	49	0.39	983	53	0.44	1063	56	0.55
1400	752	48	0.31	850	52	0.36	943	56	0.51	1024	59	0.56	1102	62	0.70
1600	819	56	0.44	902	59	0.48	988	63	0.68	1064	66	0.71	1141	69	0.89
1800	885	64	0.61	954	67	0.63	1033	70	0.90	1105	72	0.90	1180	75	1.14
2000	952	72	0.86	1005	74	0.83	1078	76	1.19						

Shaded area indicates air flow below 1200 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

4 Ton Models: DHG0483W, DHG0484W & DHG0487W with DDC Control • High Static • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
800				608	23	0.16	735	29	0.22	820	34	0.28	892	38	0.33
1000	565	28	0.15	658	32	0.21	775	38	0.27	856	43	0.35	926	46	0.40
1200	617	37	0.20	709	41	0.28	815	47	0.34	891	51	0.44	959	55	0.49
1400	669	46	0.26	760	50	0.36	856	55	0.42	926	59	0.55	993	64	0.60
1600	721	54	0.35	811	59	0.47	896	64	0.53	961	68	0.68	1026	72	0.73
1800	772	63	0.46	862	68	0.60	937	73	0.66	997	76	0.85	1059	81	0.90
2000	824	72	0.61	913	77	0.78	977	82	0.82	1032	85	1.06	1093	89	1.09
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
800	975	43	0.38	1036	47	0.46	1099	51	0.50	1155	54	0.58	1213	57	0.65
1000	1005	51	0.45	1067	55	0.56	1128	59	0.60	1183	62	0.70	1238	65	0.76
1200	1035	60	0.54	1099	64	0.69	1157	67	0.72	1210	70	0.83	1263	74	0.89
1400	1065	68	0.65	1130	72	0.84	1186	76	0.86	1238	79	1.00	1287	82	1.05
1600	1095	76	0.78	1162	81	1.03	1215	84	1.03	1266	87	1.19			
1800	1125	85	0.93	1193	89	1.25	1244	92	1.23						
2000	1155	93	1.11	1225											

Shaded area indicates air flow below 1200 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
800				642	23	0.17	783	29	0.23	870	34	0.28	950	38	0.35
1000	595	27	0.16	695	32	0.22	823	38	0.29	907	42	0.34	983	46	0.42
1200	649	36	0.21	748	41	0.29	863	46	0.36	943	50	0.42	1016	54	0.51
1400	704	44	0.28	801	50	0.38	904	54	0.45	980	58	0.51	1049	62	0.63
1600	758	53	0.37	854	59	0.49	944	62	0.56	1017	67	0.62	1082	70	0.77
1800	812	62	0.49	907	69	0.63	984	70	0.70	1053	75	0.76	1115	78	0.94
2000	866	70	0.65	960	78	0.82	1024	79	0.87	1090	83	0.93	1148	86	1.15
CFM	**1.2**			**1.4**			**1.6**			**1.8**			**2.0**		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
800	1026	40	0.40	1098	46	0.46	1167	50	0.53	1226	53	0.61	1288	56	0.69
1000	1059	49	0.49	1130	54	0.55	1197	58	0.63	1255	61	0.73	1314	64	0.81
1200	1092	57	0.60	1163	62	0.65	1227	66	0.76	1284	70	0.88	1340	73	0.95
1400	1125	66	0.73	1195	71	0.78	1258	74	0.91	1313	78	1.05	1366	81	1.12
1600	1158	75	0.89	1228	79	0.94	1288	83	1.09						
1800	1192	83	1.09	1260	87	1.12									
2000															

Shaded area indicates air flow below 1200 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

5 Ton Models: DHG0603D, DHG0604D & DHG0607D with DDC Control • Standard Static • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
900	466	30	0.11	609	34	0.16	721	38	0.22	770	42	0.27	905	45	0.35
1100	541	36	0.15	669	41	0.22	773	44	0.29	831	48	0.34	948	51	0.44
1300	615	43	0.21	730	47	0.30	825	50	0.38	892	53	0.43	990	56	0.56
1500	689	49	0.29	791	53	0.40	877	56	0.51	953	59	0.55	1033	61	0.71
1700	764	56	0.41	852	59	0.55	929	62	0.67	1013	64	0.69	1075	67	0.91
1900	838	62	0.58	913	65	0.74	981	68	0.89	1074	70	0.88	1118	72	1.15
2100	912	69	0.81	973	71	0.99	1033	73	1.18	1135	75	1.12			
2300	987	76	1.14												

Shaded area indicates air flow below 1500 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
900	488	29	0.11	641	34	0.16	761	38	0.21	870	42	0.28	958	45	0.37
1100	566	35	0.16	704	40	0.21	816	44	0.27	917	47	0.36	1002	50	0.47
1300	643	42	0.22	768	46	0.28	870	49	0.35	965	52	0.45	1046	55	0.59
1500	721	48	0.31	831	52	0.37	924	55	0.46	1012	58	0.58	1091	60	0.75
1700	799	55	0.44	894	58	0.49	978	61	0.59	1060	63	0.73	1135	66	0.96
1900	876	61	0.61	958	64	0.65	1032	66	0.77	1107	69	0.93	1179	71	1.22
2100	954	68	0.86	1021	70	0.85	1086	72	1.00	1155	74	1.19			
2300															

Shaded area indicates air flow below 1500 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

5 Ton Models: DHG0603W, DHG0604W & DHG0607W with DDC Control • High Static • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
900				631	21	0.19	722	26	0.23	806	27	0.28	895	29	0.33
1100	562	23	0.17	680	27	0.24	767	32	0.30	849	32	0.35	932	35	0.40
1300	622	29	0.22	729	32	0.31	813	37	0.39	892	37	0.44	969	41	0.49
1500	683	35	0.30	778	38	0.41	858	43	0.50	935	43	0.54	1006	46	0.60
1700	743	41	0.41	827	43	0.53	903	49	0.65	978	48	0.68	1043	52	0.73
1900	803	47	0.55	877	49	0.68	949	55	0.75	1021	53	0.84	1081	57	0.89
2100	864	53	0.75	926	54	0.88	994	61	1.01	1064	59	1.05	1118	63	1.08
2300	924	59	1.01	975	59	1.15	1040	67	1.22	1107	64	1.31	1155	69	1.32
2500	984	65	1.36	1024	65	1.49	1085	73	1.55	1150	69	1.63	1192	74	1.62
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
900	967	32	0.41	1006	29	0.47	1075	32	0.54	1142	35	0.63	1197	37	0.69
1100	1001	37	0.50	1043	35	0.56	1109	38	0.65	1174	41	0.76	1228	44	0.83
1300	1035	43	0.61	1080	42	0.68	1143	45	0.78	1206	48	0.91	1259	50	1.00
1500	1069	48	0.75	1117	48	0.81	1177	51	0.93	1238	54	1.08	1290	56	1.19
1700	1103	54	0.92	1154	55	0.97	1211	57	1.12	1270	60	1.30	1321	62	1.43
1900	1137	59	1.12	1191	61	1.16	1245	64	1.34	1302	67	1.55	1352	69	1.71
2100	1170	65	1.27	1228	68	1.39	1279	70	1.60	1334	73	1.86	1383	75	2.05
2300	1204	70	1.57	1265	74	1.66	1313	77	1.92	1366	79	2.23	1414	81	2.40
2500	1238	76	1.84	1302	81	1.99	1348	83	2.29						

Shaded area indicates air flow below 1500 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
900				661	20	0.17	764	23	0.21	854	25	0.27	949	29	0.40
1100	591	22	0.15	715	26	0.22	811	28	0.27	899	31	0.33	987	34	0.48
1300	654	28	0.21	768	31	0.29	858	34	0.34	943	37	0.42	1026	40	0.57
1500	717	34	0.28	822	37	0.38	906	39	0.44	988	42	0.52	1065	45	0.68
1700	780	40	0.38	875	42	0.49	953	45	0.56	1033	48	0.65	1103	51	0.82
1900	842	46	0.51	929	48	0.63	1000	50	0.71	1078	54	0.80	1142	56	0.98
2100	905	51	0.69	982	54	0.82	1048	55	0.90	1122	60	1.00	1181	62	1.17
2300	968	57	0.93	1036	59	1.06	1095	61	1.14	1167	66	1.25	1219	67	1.40
2500	1031	63	1.25	1089	65	1.38	1142	66	1.45	1212	72	1.56	1258	73	1.68
CFM	**1.2**			**1.4**			**1.6**			**1.8**			**2.0**		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
900	1046	31	0.40	1067	28	0.46	1140	31	0.54	1212	34	0.63	1270	37	0.64
1100	1081	37	0.48	1105	35	0.55	1176	37	0.65	1245	41	0.76	1302	43	0.78
1300	1116	42	0.59	1144	41	0.66	1211	44	0.77	1279	47	0.91	1335	49	0.96
1500	1152	47	0.72	1182	47	0.79	1247	50	0.93	1312	53	1.09	1367	55	1.11
1700	1187	53	0.88	1221	54	0.95	1282	56	1.11	1345	59	1.30	1400	61	1.34
1900	1222	58	1.08	1259	60	1.14	1318	63	1.33	1379	65	1.56	1432	67	1.59
2100	1258	64	1.32	1298	67	1.36	1354	69	1.59	1412	71	1.87	1464	73	1.94
2300	1293	69	1.61	1336	73	1.63	1389	75	1.90	1445	78	2.23	1497	80	2.30
2500	1328	75	1.97	1375	79	1.95	1425	82	2.28						

Shaded area indicates air flow below 1500 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

6 Ton Models: DHG0723D, DHG0724D & DHG0727D with DDC Control • Standard Static • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1200	580	34	0.19	691	40	0.24	796	46	0.32	887	51	0.37	971	56	0.50
1400	639	43	0.25	742	49	0.31	839	54	0.40	923	59	0.45	1001	64	0.61
1600	699	53	0.33	793	58	0.39	882	63	0.50	959	67	0.55	1032	71	0.74
1800	758	62	0.44	844	66	0.50	925	71	0.63	995	75	0.68	1062	79	0.91
2000	818	71	0.58	895	75	0.63	968	80	0.78	1031	83	0.83	1093	87	1.11
2200	877	80	0.77	946	84	0.80	1012	88	0.97	1067	90	1.01			
2400	937	90	1.01	997	90	1.02									

Shaded area indicates air flow below 1800 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1200	609	33	0.19	727	39	0.24	840	45	0.32	937	50	0.40	1028	55	0.47
1400	671	42	0.25	780	48	0.31	885	53	0.40	975	58	0.49	1059	62	0.56
1600	732	51	0.32	834	56	0.40	930	61	0.49	1012	66	0.60	1091	70	0.67
1800	794	60	0.42	887	65	0.50	975	69	0.61	1050	74	0.73	1123	78	0.80
2000	856	69	0.54	940	73	0.64	1019	78	0.77	1088	82	0.89	1154	86	0.96
2200	918	78	0.70	993	82	0.81	1064	86	0.95	1125	90	1.08			
2400	980	87	0.91	1047	90	1.03									

Shaded area indicates air flow below 1800 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

6 Ton Models: DHG0723W, DHG0724W & DHG0727W with DDC Control • High Static • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1200	583	19	0.20	675	22	0.25	777	27	0.31	864	31	0.36	942	34	0.45
1400	643	27	0.25	730	30	0.32	826	34	0.38	908	38	0.43	982	41	0.55
1600	703	35	0.32	786	37	0.40	875	41	0.48	952	44	0.53	1021	47	0.67
1800	764	42	0.40	841	45	0.51	925	48	0.60	996	51	0.65	1061	54	0.81
2000	824	50	0.51	897	52	0.65	974	55	0.74	1041	58	0.79	1101	61	0.99
2200	884	57	0.65	952	60	0.83	1023	62	0.93	1085	65	0.97	1140	67	1.21
2400	944	65	0.83	1007	67	1.05	1073	70	1.16	1129	72	1.18	1180	74	1.48
2600	1005	72	1.05	1063	74	1.33	1122	77	1.44	1173	79	1.44	1220	81	1.81
2800	1065	80	1.34	1118	82	1.70	1171	84	1.80	1217	86	1.76	1259	87	2.21
3000	1125	87	1.70	1174	89	2.16	1220	90	2.24						
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1200	1015	35	0.55	1079	38	0.57	1139	38	0.70	1199	41	0.81	1252	44	0.81
1400	1051	42	0.66	1112	44	0.67	1170	45	0.82	1228	48	0.95	1280	51	0.93
1600	1088	49	0.79	1145	51	0.79	1201	52	0.97	1258	55	1.12	1309	57	1.07
1800	1124	55	0.94	1178	58	0.93	1232	59	1.14	1287	62	1.31	1338	64	1.23
2000	1160	62	1.13	1211	65	1.09	1263	66	1.33	1316	69	1.54	1367	71	1.42
2200	1197	69	1.35	1245	71	1.28	1294	73	1.56	1346	75	1.81	1395	77	1.63
2400	1233	76	1.61	1278	78	1.50	1325	80	1.84	1375	82	2.12	1424	84	1.88
2600	1269	83	1.93	1311	85	1.76	1356	87	2.15	1404	89	2.20	1453	90	2.30
2800	1305	90	2.31	1344	90	2.06									
3000															

Shaded area indicates air flow below 1800 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1200	604	18	0.19	711	22	0.24	821	26	0.33	913	30	0.38	993	33	0.43
1400	668	25	0.25	769	29	0.30	872	33	0.41	959	37	0.46	1034	40	0.52
1600	732	33	0.32	827	36	0.38	923	40	0.51	1005	43	0.56	1075	46	0.62
1800	796	40	0.40	884	43	0.47	975	47	0.64	1052	50	0.69	1116	53	0.74
2000	859	48	0.51	942	51	0.58	1026	54	0.80	1098	57	0.84	1157	59	0.88
2200	923	55	0.65	1000	58	0.73	1077	61	1.00	1144	63	1.03	1198	66	1.06
2400	987	63	0.82	1058	65	0.91	1129	68	1.24	1190	70	1.26	1239	72	1.27
2600	1051	70	1.05	1115	73	1.13	1180	75	1.55	1236	77	1.53	1280	79	1.52
2800	1115	78	1.33	1173	80	1.41	1231	82	1.93	1282	84	1.87	1321	85	1.82
3000	1178	85	1.69	1231	87	1.75	1283	89	2.40						

CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1200	1076	34	0.57	1144	37	0.60	1208	37	0.74	1272	40	0.85	1327	43	0.89
1400	1113	41	0.68	1178	43	0.71	1240	44	0.87	1303	47	1.00	1358	50	1.05
1600	1151	47	0.82	1213	50	0.83	1272	51	1.02	1333	54	1.18	1389	56	1.23
1800	1189	54	0.98	1247	57	0.98	1305	58	1.20	1364	61	1.38	1421	63	1.44
2000	1227	61	1.17	1282	63	1.15	1337	65	1.41	1394	67	1.62	1452	69	1.69
2200	1264	68	1.40	1316	70	1.34	1370	72	1.66	1425	74	1.90	1483	75	1.98
2400	1302	74	1.68	1350	76	1.58	1402	78	1.94	1455	81	2.23	1514	82	2.33
2600	1340	81	2.01	1385	83	1.85	1434	85	2.28						
2800															
3000															

Shaded area indicates air flow below 1800 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

Static Pressure

3-6 TONS		
DOWNFLOW ECONOMIZER PRESSURE DROP		
Cabinet	CFM	SP in.wg.
3 Ton	900	.03"
	1200	.05"
	1500	.08"
4 Ton	1200	.06"
	1600	.10"
	2000	.14"
5 Ton	1500	.08"
	2000	.14"
	2500	.22"
6 Ton	1800	.13"
	2400	.22"
	3000	.33"

3-6 TONS		
HORIZONTAL ECONOMIZER PRESSURE DROP		
Cabinet	CFM	SP in.wg.
3 Ton	900	.06"
	1200	.11"
	1500	.16"
4 Ton	1200	.11"
	1600	.19"
	2000	.29"
5 Ton	1500	.18"
	2000	.30"
	2500	.45"
6 Ton	1800	.24"
	2400	.41"
	3000	.61"

DHG(C)036 (3 Tons) With DDC Control In Moudulating Hot Gas Reheat Mode- High Stage

	EAT (DB) (OF)		75			75			75			75		
	EAT (WB) (OF)			62			64			68			71	
Ambient Temperature (oF)		CFM	900	1100	1200	900	1100	1200	900	1100	1200	900	1100	1200
95	TC	Btu/h	12243	12376	12631	15566	15830	15787	18552	18404	18301	26182	26996	27548
	S/T	-	0.50	0.61	0.64	0.42	0.47	0.50	0.19	0.18	0.19	0.24	0.24	0.24
	CMPR	kW	1.97	1.97	1.97	2.00	2.01	2.01	2.03	2.03	2.03	2.11	2.12	2.12
	ID Out (DB)	oF	69.1	69.1	69.2	69.1	69.0	69.2	72.3	72.7	72.8	69.4	70.2	70.6
	ID Out (WB)	oF	57.6	58.3	58.7	58.9	59.4	59.9	62.4	63.2	63.7	62.8	64.1	64.7
	Valve Position													
85	TC	Btu/h	12292	12569	12671	15508	15961	15998	20699	21495	21895	27211	27985	29474
	S/T	-	0.47	0.56	0.61	0.40	0.45	0.48	0.24	0.26	0.28	0.23	0.25	0.26
	CMPR	kW	1.74	1.74	1.74	1.76	1.77	1.76	1.80	1.81	1.81	1.86	1.86	1.88
	ID Out (DB)	oF	69.4	69.3	69.3	69.4	69.2	69.4	70.4	70.5	70.5	69.4	69.6	69.9
	ID Out (WB)	oF	57.4	58.2	58.6	58.7	59.3	59.8	61.2	62.0	62.5	62.6	63.4	64.3
	Valve Position													
80	TC	Btu/h	12317	12665	12691	15479	16027	16104	21772	23041	23692	27726	28480	30437
	S/T	-	0.46	0.54	0.59	0.38	0.44	0.47	0.27	0.31	0.33	0.23	0.26	0.27
	CMPR	kW	1.62	1.62	1.62	1.64	1.64	1.64	1.69	1.70	1.70	1.73	1.74	1.75
	ID Out (DB)	oF	69.5	69.4	69.4	69.5	69.3	69.5	69.5	69.4	69.3	69.3	69.4	69.5
	ID Out (WB)	oF	57.3	58.2	58.6	58.7	59.3	59.8	60.6	61.5	61.9	62.5	63.1	64.1
	Valve Position													
75	TC	Btu/h	12547	12771	12835	15795	16262	16367	22148	23338	23826	28044	28795	30338
	S/T	-	0.46	0.53	0.59	0.38	0.43	0.46	0.27	0.31	0.32	0.23	0.26	0.27
	CMPR	kW	1.62	1.62	1.61	1.63	1.63	1.63	1.67	1.68	1.68	1.70	1.71	1.72
	ID Out (DB)	oF	69.5	69.4	69.4	69.5	69.4	69.5	69.5	69.4	69.4	69.4	69.4	69.5
	ID Out (WB)	oF	57.3	58.1	58.5	58.6	59.3	59.7	60.5	61.3	61.8	62.4	62.9	63.7
	Valve Position													
70	TC	Btu/h	12776	12878	12979	16110	16497	16629	22525	23634	23960	28361	29111	30240
	S/T	-	0.45	0.53	0.58	0.37	0.42	0.46	0.27	0.31	0.32	0.23	0.25	0.27
	CMPR	kW	1.62	1.61	1.61	1.63	1.62	1.62	1.65	1.65	1.65	1.67	1.67	1.68
	ID Out (DB)	oF	69.4	69.5	69.5	69.6	69.4	69.5	69.4	69.4	69.6	69.4	69.4	69.4
	ID Out (WB)	oF	57.2	58.1	58.5	58.6	59.2	59.6	60.4	61.2	61.8	62.2	62.8	63.4
	Valve Position													
65	TC	Btu/h	13006	12984	13123	16426	16732	16892	22901	23931	24094	28679	29426	30141
	S/T	-	0.45	0.52	0.57	0.36	0.41	0.45	0.27	0.30	0.31	0.22	0.25	0.27
	CMPR	kW	1.62	1.61	1.61	1.62	1.61	1.61	1.63	1.63	1.63	1.64	1.64	1.64
	ID Out (DB)	oF	69.3	69.5	69.5	69.6	69.5	69.5	69.4	69.3	69.7	69.4	69.4	69.4
	ID Out (WB)	oF	57.2	58.1	58.5	58.5	59.1	59.6	60.3	61.0	61.8	62.0	62.6	63.0
	Valve Position													

DHG(C)036 (3 Tons) With DDC Control In Moudulating Hot Gas Reheat Mode - Low Stage

	EAT (DB) (OF)		75			75			75			75		
	EAT (WB) (OF)			62			64			68			71	
Ambient Temperature (oF)		CFM	900	1100	1200	900	1100	1200	900	1100	1200	900	1100	1200
60	TC	Btu/h	8710	8833	8938	11941	12026	12076	18512	19292	19567	23050	24569	25553
	S/T	-	0.66	0.75	0.82	0.47	0.56	0.61	0.32	0.36	0.38	0.25	0.28	0.30
	CMPR	kW	1.03	1.02	1.01	1.02	1.00	1.00	0.99	0.97	0.97	0.98	0.97	0.97
	ID Out (DB)	oF	69.3	69.5	69.5	69.6	69.5	69.5	69.5	69.5	69.6	69.8	69.5	69.5
	ID Out (WB)	oF	58.8	59.4	59.6	59.9	60.6	60.9	62.0	62.8	63.1	63.9	64.5	65.1
	Valve Position													
50	TC	Btu/h	10482	9407	9402	13028	12454	12516	18815	19749	20076	23784	25333	26100
	S/T	-	0.63	0.71	0.77	0.47	0.54	0.59	0.31	0.35	0.37	0.24	0.28	0.29
	CMPR	kW	1.03	1.02	1.02	0.99	0.99	0.99	0.96	0.95	0.95	0.94	0.93	0.93
	ID Out (DB)	oF	68.6	69.5	69.5	69.0	69.5	69.5	69.6	69.6	69.6	69.7	69.5	69.6
	ID Out (WB)	oF	58.3	59.2	59.5	59.5	60.4	60.8	61.8	62.6	63.0	63.6	64.4	64.9
	Valve Position													
40	TC	Btu/h	12254	9981	9866	14115	12881	12956	19119	20206	20584	24518	26097	26647
	S/T	-	0.60	0.67	0.73	0.48	0.52	0.57	0.30	0.33	0.36	0.24	0.27	0.28
	CMPR	kW	1.03	1.03	1.02	0.97	0.98	0.98	0.93	0.92	0.93	0.91	0.89	0.89
	ID Out (DB)	oF	67.9	69.5	69.6	68.4	69.6	69.6	69.7	69.6	69.6	69.6	69.6	69.7
	ID Out (WB)	oF	57.8	59.1	59.3	59.0	60.3	60.6	61.6	62.5	63.0	63.3	64.3	64.8
	Valve Position													

DHG(C)048 (4Tons) With DDC Control In Moudulating Hot Gas Reheat Mode- High Stage

	EAT (DB) (OF)		75			75			75			75		
	EAT (WB) (OF)			62			64			68			71	
Ambient Temperature (oF)		CFM	900	1100	1200	900	1100	1200	900	1100	1200	900	1100	1200
95	TC	Btu/h	16572	16389	16035	15322	17300	25781	23647	33692	37721	34503	31116	31122
	S/T	-	0.44	0.59	0.73	0.44	0.56	0.46	0.29	0.28	0.31	0.22	0.10	0.08
	CMPR	kW	2.87	2.86	2.87	1.96	2.96	2.99	2.01	3.08	3.12	3.09	3.05	3.05
	ID Out (DB)	oF	68.9	69.3	69.3	69.4	69.3	69.4	69.6	69.7	69.7	69.2	73.8	74.3
	ID Out (WB)	oF	56.7	58.4	59.1	59.3	60.1	59.5	61.2	61.2	62.0	61.3	65.1	66.3
85	TC	Btu/h	17555	17012	17399	19234	23197	27732	28118	35925	39705	35814	35177	35481
	S/T	-	0.39	0.54	0.67	0.35	0.43	0.43	0.25	0.27	0.30	0.21	0.15	0.13
	CMPR	kW	2.55	2.53	2.54	2.27	2.61	2.62	2.34	2.71	2.74	2.74	2.73	2.73
	ID Out (DB)	oF	69.4	49.5	69.3	69.6	69.3	69.3	69.4	69.6	69.6	69.2	72.5	73.0
	ID Out (WB)	oF	56.3	58.1	58.9	58.0	58.8	59.2	59.8	60.7	61.7	60.9	64.3	65.6
80	TC	Btu/h	18046	17323	18081	21190	26146	28708	30354	37042	40697	36469	37207	37660
	S/T	-	0.36	0.52	0.64	0.30	0.37	0.42	0.23	0.26	0.29	0.20	0.17	0.16
	CMPR	kW	2.39	2.36	2.37	2.42	2.43	2.43	2.50	2.53	2.55	2.57	2.57	2.57
	ID Out (DB)	oF	69.6	39.6	69.3	69.7	69.3	69.2	69.3	69.6	69.6	69.2	71.80	72.4
	ID Out (WB)	oF	56.1	58.0	58.8	57.3	58.2	59.0	59.1	60.5	61.5	60.7	63.9	65.2
75	TC	Btu/h	18381	17509	17960	21960	26506	28949	30849	37564	41175	36587	38382	38940
	S/T	-	0.37	0.51	0.63	0.30	0.36	0.41	0.22	0.25	0.28	0.20	0.18	0.17
	CMPR	kW	2.37	2.35	2.35	2.40	2.40	2.39	2.45	2.47	2.49	2.51	2.51	2.51
	ID Out (DB)	oF	69.4	49.6	69.4	69.5	69.4	69.3	69.4	69.6	69.6	69.2	71.3	72.0
	ID Out (WB)	oF	55.9	57.9	58.7	57.0	58.1	58.9	58.9	60.4	61.4	60.6	63.6	65.0
70	TC	Btu/h	18715	17695	17840	22729	26866	29191	31345	38087	41652	36705	39556	40220
	S/T	-	0.37	0.50	0.63	0.30	0.35	0.40	0.22	0.25	0.28	0.20	0.20	0.19
	CMPR	kW	2.36	2.33	2.33	2.38	2.37	2.36	2.41	2.42	2.42	2.44	2.45	2.45
	ID Out (DB)	oF	69.1	59.6	69.4	69.2	69.5	69.4	69.6	69.7	69.7	69.3	70.8	71.6
	ID Out (WB)	oF	55.8	57.9	58.7	56.8	58.1	58.9	58.7	60.2	61.3	60.5	63.4	64.7
65	TC	Btu/h	19050	17881	17719	23499	27226	29432	31840	38609	42130	36823	40731	41500
	S/T	-	0.38	0.49	0.62	0.30	0.34	0.39	0.21	0.24	0.27	0.20	0.21	0.20
	CMPR	kW	2.34	2.32	2.31	2.36	2.34	2.32	2.36	2.36	2.36	2.38	2.39	2.39
	ID Out (DB)	oF	68.9	69.6	69.5	69.0	69.60	69.5	69.7	69.7	69.7	69.3	70.3	71.2
	ID Out (WB)	oF	55.6	57.8	58.6	56.5	58.0	58.8	58.5	60.1	61.2	60.4	63.1	64.5

DHG(C)048 (4Tons) With DDC Control In Moudulating Hot Gas Reheat Mode - Low Stage

	EAT (DB) (OF)		75			75			75			75		
	EAT (WB) (OF)			62			64			68			71	
Ambient Temperature (oF)		CFM	900	1100	1200	900	1100	1200	900	1100	1200	900	1100	1200
60	TC	Btu/h	11767	10764	14625	18300	17253	18433	26615	29545	31763	29988	34219	37942
	S/T	-	0.54	0.81	0.74	0.37	0.50	0.59	0.25	0.31	0.35	0.23	0.27	0.21
	CMPR	kW	1.46	1.46	1.45	1.48	1.45	1.44	1.45	1.42	1.41	1.42	1.40	1.40
	ID Out (DB)	oF	69.5	69.6	69.5	69.2	69.7	69.6	69.6	69.7	69.8	69.6	69.6	71.3
	ID Out (WB)	oF	58.2	59.6	59.4	58.3	60.3	60.9	60.2	62.1	62.9	62.8	64.4	66.3
50	TC	Btu/h	13857	12210	15716	22422	22178	22604	30007	32918	34893	30861	35863	40127
	S/T	-	0.54	0.78	0.72	0.38	0.50	0.57	0.26	0.31	0.34	0.23	0.27	0.22
	CMPR	kW	1.45	1.46	1.46	1.47	1.44	1.44	1.44	1.41	1.40	1.40	1.38	1.38
	ID Out (DB)	oF	69.1	69.6	69.5	68.5	69.3	69.5	69.1	69.5	69.7	69.6	69.6	71.0
	ID Out (WB)	oF	58.0	59.5	59.3	57.8	59.9	60.6	59.8	61.9	62.7	62.7	64.3	66.0
40	TC	Btu/h	15947	13655	16806	26543	27102	26774	33399	36290	38022	31734	37506	42311
	S/T	-	0.56	0.65	0.63	0.43	0.48	0.48	0.29	0.30	0.31	0.21	0.24	0.26
	CMPR	kW	1.42	1.47	1.49	1.42	1.41	1.46	1.38	1.37	1.37	1.32	1.29	1.28
	ID Out (DB)	oF	67.1	69.4	69.6	64.8	67.0	68.7	66.8	68.6	69.4	69.5	69.7	69.7
	ID Out (WB)	oF	56.8	58.9	59.0	55.3	58.1	59.3	58.0	60.7	61.9	62.2	63.8	64.4

DHG(C)060 (5 Tons) With DDC Control In Moudulating Hot Gas Reheat Mode- High Stage

	EAT (DB) (OF)		75			75			75			75		
	EAT (WB) (OF)			62			64			68			71	
Ambient Temperature (oF)		CFM	900	1100	1200	900	1100	1200	900	1100	1200	900	1100	1200
95	TC	Btu/h	21776	22980	23480	26926	27941	29106	36237	38095	41421	43789	47030	48931
	S/T	-	0.40	0.49	0.63	0.33	0.40	0.51	0.25	0.28	0.35	0.21	0.24	0.24
	CMPR	kW	3.57	3.56	3.58	3.62	3.62	3.64	3.73	3.75	3.79	3.80	3.83	3.85
	ID Out (DB)	oF	68.8	68.7	68.7	68.8	68.8	68.7	68.9	69.0	69.0	69.0	69.2	70.3
	ID Out (WB)	oF	55.9	57.2	58.4	56.8	58.3	59.6	58.9	60.3	62.0	60.7	62.3	64.3
85	TC	Btu/h	24611	24444	24736	28157	29586	30781	37212	40139	43720	43988	48887	52788
	S/T	-	0.39	0.44	0.58	0.30	0.36	0.47	0.24	0.27	0.33	0.20	0.23	0.25
	CMPR	kW	3.21	3.22	3.17	3.26	3.24	3.23	3.32	3.34	3.38	3.36	3.42	3.46
	ID Out (DB)	oF	68.1	68.9	68.9	69.0	69.1	68.9	69.1	69.0	69.0	69.1	69.2	69.6
	ID Out (WB)	oF	55.0	56.8	58.1	56.3	57.9	59.3	58.5	59.9	61.7	60.3	61.9	63.7
80	TC	Btu/h	26028	25176	25364	28773	30408	31619	37700	41161	44870	44087	49815	54717
	S/T	-	0.39	0.42	0.55	0.29	0.34	0.45	0.23	0.27	0.32	0.20	0.22	0.26
	CMPR	kW	3.03	3.05	2.97	3.08	3.05	3.02	3.11	3.14	3.17	3.14	3.22	3.26
	ID Out (DB)	oF	67.7	69.0	69.0	69.1	69.3	69.0	69.2	69.0	69.0	69.1	69.2	69.2
	ID Out (WB)	oF	54.6	56.6	58.0	56.1	57.7	59.2	58.3	59.7	61.5	60.1	61.7	63.4
75	TC	Btu/h	26478	26164	25801	29368	30866	31955	37995	41562	45216	44606	50300	55071
	S/T	-	0.40	0.43	0.54	0.30	0.34	0.44	0.22	0.26	0.32	0.19	0.22	0.26
	CMPR	kW	3.00	3.02	2.97	3.04	3.02	3.00	3.07	3.10	3.12	3.10	3.17	3.20
	ID Out (DB)	oF	67.3	68.6	69.0	68.7	69.2	69.0	69.3	69.1	69.0	69.2	69.2	69.2
	ID Out (WB)	oF	54.4	56.4	57.9	55.9	57.6	59.1	58.2	59.7	61.4	60.0	61.6	63.3
70	TC	Btu/h	26927	27152	26238	29963	31323	32290	38291	41963	45562	45124	50784	55426
	S/T	-	0.41	0.45	0.53	0.31	0.34	0.44	0.22	0.26	0.31	0.19	0.22	0.26
	CMPR	kW	2.97	2.99	2.96	3.00	2.99	2.99	3.03	3.05	3.08	3.06	3.11	3.15
	ID Out (DB)	oF	67.0	68.1	69.0	68.3	69.0	69.0	69.3	69.2	68.9	69.3	69.1	69.1
	ID Out (WB)	oF	54.3	56.1	57.9	55.8	57.4	59.0	58.2	59.7	61.4	60.0	61.6	63.2
65	TC	Btu/h	27377	28140	26675	30558	31781	32626	38586	42364	45908	45643	51269	55780
	S/T	-	0.42	0.46	0.52	0.32	0.34	0.43	0.21	0.25	0.31	0.18	0.22	0.26
	CMPR	kW	2.94	2.96	2.96	2.96	2.96	2.97	2.99	3.01	3.03	3.02	3.06	3.09
	ID Out (DB)	oF	66.6	67.7	69.0	67.9	68.90	69.0	69.4	69.3	68.9	69.4	69.1	69.1
	ID Out (WB)	oF	54.1	55.9	57.8	55.6	57.3	58.9	58.1	59.7	61.3	59.9	61.5	63.1

DHG(C)060 (5 Tons) With DDC Control In Moudulating Hot Gas Reheat Mode - Low Stage

	EAT (DB) (OF)		75			75			75			75		
	EAT (WB) (OF)			62			64			68			71	
Ambient Temperature (oF)		CFM	900	1100	1200	900	1100	1200	900	1100	1200	900	1100	1200
60	TC	Btu/h	19349	18046	18217	21988	22204	23742	30552	32679	35615	37274	40853	44787
	S/T	-	0.50	0.56	0.75	0.37	0.44	0.57	0.26	0.31	0.39	0.22	0.25	0.30
	CMPR	kW	2.02	1.97	1.92	2.00	1.96	1.92	1.98	1.95	1.92	1.96	1.92	1.90
	ID Out (DB)	oF	67.8	69.0	69.0	69.0	69.4	69.4	69.4	69.3	69.1	69.5	69.3	69.3
	ID Out (WB)	oF	56.6	58.2	59.2	58.1	59.4	60.5	60.3	61.7	62.9	62.1	63.6	64.9
50	TC	Btu/h	21031	19995	18942	23824	23772	24108	30741	33122	35998	37654	41258	45139
	S/T	-	0.53	0.59	0.74	0.40	0.46	0.56	0.27	0.30	0.38	0.22	0.25	0.30
	CMPR	kW	1.95	1.91	1.88	1.94	1.90	1.87	1.92	1.88	1.85	1.90	1.86	1.84
	ID Out (DB)	oF	66.7	68.1	68.9	67.9	68.8	69.3	69.2	69.4	69.2	69.5	69.5	69.4
	ID Out (WB)	oF	56.1	57.8	59.1	57.5	59.1	60.5	60.1	61.7	62.8	61.9	63.5	64.8
40	TC	Btu/h	22713	21943	19667	25659	25339	24474	30930	33565	36380	38033	41662	45490
	S/T	-	0.55	0.61	0.72	0.43	0.47	0.55	0.27	0.29	0.37	0.21	0.24	0.29
	CMPR	kW	1.88	1.85	1.84	1.87	1.84	1.82	1.86	1.81	1.78	1.83	1.79	1.78
	ID Out (DB)	oF	65.6	67.1	68.8	66.7	68.1	69.2	69.0	69.4	69.3	69.5	69.6	69.4
	ID Out (WB)	oF	55.5	57.3	58.9	56.9	58.7	60.4	59.8	61.6	62.7	61.7	63.4	64.7

DHG(C)072 (6 Tons) With DDC Control In Moudulating Hot Gas Reheat Mode- High Stage

	EAT (DB) (OF)		75			75			75			75		
	EAT (WB) (OF)			62			64			68			71	
Ambient Temperature (oF)		CFM	900	1100	1200	900	1100	1200	900	1100	1200	900	1100	1200
95	TC	Btu/h	29145	24400	24228	29190	30602	30129	35034	35482	34728	38197	37520	35968
	S/T	-	0.33	0.52	0.64	0.32	0.41	0.48	0.12	0.14	0.16	0.01	0.00	0.00
	CMPR	kW	4.02	3.96	3.97	4.02	4.02	4.04	4.11	4.09	4.09	4.15	4.12	4.12
	ID Out (DB)	oF	69.2	69.2	69.3	69.3	69.4	69.7	72.9	73.2	73.3	75.7	76.3	76.3
	ID Out (WB)	oF	57.3	57.9	58.7	57.3	59.0	60.0	60.7	62.7	63.9	63.2	65.7	67.0
85	TC	Btu/h	27009	25780	24823	30637	31767	32399	41156	43443	44408	47802	50510	51817
	S/T	-	0.38	0.50	0.63	0.31	0.40	0.48	0.19	0.23	0.27	0.13	0.15	0.17
	CMPR	kW	3.61	3.56	3.52	3.63	3.59	3.57	3.68	3.67	3.69	3.74	3.75	3.77
	ID Out (DB)	oF	68.8	69.1	69.2	69.1	69.2	69.4	70.5	70.6	70.7	71.4	71.8	71.9
	ID Out (WB)	oF	56.2	57.6	58.6	56.9	58.7	59.7	59.1	61.3	62.7	61.1	63.6	65.1
80	TC	Btu/h	25941	26470	25121	31360	32350	33534	44217	47423	49248	52605	57005	59741
	S/T	-	0.40	0.49	0.63	0.31	0.40	0.48	0.22	0.28	0.32	0.19	0.23	0.26
	CMPR	kW	3.40	3.36	3.29	3.44	3.37	3.33	3.46	3.46	3.49	3.54	3.56	3.59
	ID Out (DB)	oF	68.6	69.0	69.1	69.0	69.1	69.2	69.3	69.3	69.4	69.3	69.5	69.7
	ID Out (WB)	oF	55.7	57.5	58.6	56.7	58.6	59.6	58.3	60.6	62.1	60.1	62.6	64.2
75	TC	Btu/h	28197	28403	26252	32861	33830	34530	44913	47752	49471	53406	58074	60970
	S/T	-	0.41	0.49	0.61	0.32	0.38	0.46	0.22	0.28	0.31	0.19	0.23	0.26
	CMPR	kW	3.36	3.33	3.28	3.39	3.34	3.31	3.41	3.41	3.42	3.47	3.48	3.50
	ID Out (DB)	oF	67.8	68.6	69.1	68.5	69.1	69.2	69.3	69.3	69.6	69.3	69.5	69.7
	ID Out (WB)	oF	55.1	57.1	58.4	56.2	58.3	59.5	58.1	60.4	62.0	60.0	62.4	64.0
70	TC	Btu/h	30454	30335	27382	34363	35311	35526	45609	48081	49695	54208	59142	62198
	S/T	-	0.41	0.48	0.58	0.33	0.37	0.45	0.21	0.27	0.30	0.18	0.22	0.25
	CMPR	kW	3.32	3.30	3.26	3.35	3.32	3.29	3.37	3.35	3.36	3.40	3.41	3.41
	ID Out (DB)	oF	67.0	68.1	69.1	68.0	69.1	69.3	69.3	69.4	69.8	69.4	69.4	69.6
	ID Out (WB)	oF	54.6	56.7	58.3	55.7	58.1	59.3	58.0	60.3	62.0	59.8	62.3	63.9
65	TC	Btu/h	32710	32268	28513	35864	36791	36522	46305	48410	49918	55009	60211	63427
	S/T	-	0.42	0.48	0.56	0.34	0.35	0.43	0.21	0.27	0.29	0.18	0.22	0.25
	CMPR	kW	3.28	3.27	3.25	3.30	3.29	3.27	3.32	3.30	3.29	3.33	3.33	3.32
	ID Out (DB)	oF	66.2	67.7	69.1	67.5	69.1	69.3	69.3	69.4	70.0	69.4	69.4	69.6
	ID Out (WB)	oF	54.0	56.3	58.1	55.2	57.8	59.2	57.8	60.1	61.9	59.7	62.1	63.7

DHG(C)072 (6 Tons) With DDC Control In Moudulating Hot Gas Reheat Mode - Low Stage

	EAT (DB) (OF)		75			75			75			75		
	EAT (WB) (OF)			62			64			68			71	
Ambient Temperature (oF)		CFM	900	1100	1200	900	1100	1200	900	1100	1200	900	1100	1200
60	TC	Btu/h	24620	22369	19782	27929	26439	26162	36400	38917	40230	44199	48100	50986
	S/T	-	0.53	0.65	0.78	0.41	0.47	0.59	0.26	0.32	0.38	0.21	0.26	0.30
	CMPR	kW	2.16	2.12	2.08	2.16	2.11	2.05	2.13	2.05	2.01	2.06	2.02	2.02
	ID Out (DB)	oF	66.6	68.2	69.2	67.9	69.2	69.3	69.4	69.4	69.5	69.6	69.5	69.6
	ID Out (WB)	oF	56.1	58.3	59.3	57.5	59.7	60.7	60.2	62.0	63.2	62.2	64.1	65.2
50	TC	Btu/h	26944	25708	23708	31101	29926	28117	37808	40192	41857	45757	50642	52873
	S/T	-	0.55	0.67	0.77	0.43	0.50	0.56	0.26	0.32	0.37	0.21	0.25	0.29
	CMPR	kW	2.08	2.04	2.01	2.06	2.04	2.00	2.04	1.97	1.93	2.00	1.92	1.92
	ID Out (DB)	oF	65.4	66.9	68.1	66.5	68.1	69.1	69.2	69.4	69.4	69.5	69.5	69.6
	ID Out (WB)	oF	55.4	57.6	58.9	56.7	59.0	60.4	59.9	61.9	63.0	61.8	63.8	65.0
40	TC	Btu/h	29268	29047	27634	34273	33413	30072	39216	41467	43484	47315	53184	54760
	S/T	-	0.57	0.69	0.76	0.45	0.53	0.53	0.26	0.32	0.36	0.21	0.24	0.28
	CMPR	kW	2.00	1.96	1.94	1.96	1.97	1.95	1.95	1.89	1.85	1.94	1.82	1.82
	ID Out (DB)	oF	64.2	65.6	67.0	65.1	67.0	68.9	69.0	69.4	69.3	69.4	69.5	69.6
	ID Out (WB)	oF	54.7	56.9	58.5	55.9	58.3	60.1	59.6	61.8	62.8	61.4	63.5	64.8


TC: Total Capacity
S/T: Sensible to Total Capacity Ratio
CMPR: Compressor Power Input

Electrical Data

Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Electric Heat			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	Part #	KW*	FLA	FLA	FLA	MCA	MOP
DHG0361D	208/230/1/60	1	14.5	91.0	1	0.17	0.95	1	0.75	5.7	-	-	-	-	-	24.8/24.8	35/35
											-	-	-	9.6/8.7	-	34.4/33.5	45/45
											-	-	-	-	2.2/1.9 (1.7/1.5)	27.0/26.7	40/40
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	36.6/35.4	50/45
DHG0363D	208/230/3/60	1	9.2	82.0	1	0.17	0.95	1	0.75	5.7	-	-	-	-	-	18.1/18.1	25/25
											-	-	-	9.6/8.7	-	27.7/26.8	35/35
											-	-	-	-	2.2/1.9 (1.7/1.5)	20.3/20.0	25/25
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	29.9/28.7	35/35
DHG0363W	208/230/3/60	1	9.2	82.0	1	0.17	0.95	1	1.2	5.0	-	-	-	-	-	17.4/17.4	25/25
											-	-	-	9.6/8.7	-	27.0/26.1	35/35
											-	-	-	-	2.2/1.9 (1.7/1.5)	19.6/19.3	25/25
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	29.2/28.0	35/35
DHG0364D	460/3/60	1	4.2	44.3	1	0.17	0.48	1	1.2	2.5	-	-	-	-	-	8.2	15
											-	-	-	4.3	-	12.5	15
											-	-	-	-	0.9 (0.5)	9.1	15
											-	-	-	4.3	0.9 (0.5)	13.4	15
DHG0364W	460/3/60	1	4.2	44.3	1	0.17	0.48	1	1.2	2.5	-	-	-	-	-	8.2	15
											-	-	-	4.3	-	12.5	15
											-	-	-	-	0.9 (0.5)	9.1	15
											-	-	-	4.3	0.9 (0.5)	13.4	15
DHG0367D	575/3/60	1	3.7	28.7	1	0.17	0.39	1	1.2	2.0	-	-	-	-	-	7.0	15
											-	-	-	3.5	-	10.5	15
											-	-	-	-	1.0	8.0	15
											-	-	-	3.5	1.0	11.5	15
DHG0367W	575/3/60	1	3.7	28.7	1	0.17	0.39	1	1.2	2.0	-	-	-	-	-	7.0	15
											-	-	-	3.5	-	10.5	15
											-	-	-	-	1.0	8.0	15
											-	-	-	3.5	1.0	11.5	15
DHG0481D	208/230/1/60	1	23.2	128	1	0.17	0.95	1	1.0	6.9	-	-	-	-	-	36.9/36.9	60/60
											-	-	-	9.6/8.7	-	46.5/45.6	60/60
											-	-	-	-	2.2/1.9 (1.7/1.5)	39.1/38.8	60/60
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	48.7/47.5	70/70
DHG0483D	208/230/3/60	1	12.0	105	1	0.17	0.95	1	1.0	6.9	-	-	-	-	-	22.8/22.8	30/30
											-	-	-	9.6/8.7	-	32.4/31.5	40/40
											-	-	-	-	2.2/1.9 (1.7/1.5)	25.0/24.7	35/35
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	34.6/33.4	45/40
DHG0483W	208/230/3/60	1	12.0	105	1	0.17	0.95	1	1.2	5.0	-	-	-	-	-	20.9/20.9	30/30
											-	-	-	9.6/8.7	-	30.5/29.6	40/40
											-	-	-	-	2.2/1.9 (1.7/1.5)	23.1/22.8	30/30
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	32.7/31.5	40/40
DHG0484D	460/3/60	1	6.2	61.8	1	0.17	0.48	1	1.2	2.5	-	-	-	-	-	10.7	15
											-	-	-	4.3	-	15.0	20
											-	-	-	-	0.9 (0.5)	11.6	15
											-	-	-	4.3	0.9 (0.5)	15.9	20
DHG0484W	460/3/60	1	6.2	61.8	1	0.17	0.48	1	1.2	2.5	-	-	-	-	-	10.7	15
											-	-	-	4.3	-	15.0	20
											-	-	-	-	0.9 (0.5)	11.6	15
											-	-	-	4.3	0.9 (0.5)	15.9	20
DHG0487D	575/3/60	1	4.5	39.0	1	0.17	0.39	1	1.2	2.0	-	-	-	-	-	8.0	15
											-	-	-	3.5	-	11.5	15
											-	-	-	-	1.0	9.0	15
											-	-	-	3.5	1.0	12.5	15
DHG0487W	575/3/60	1	4.5	39.0	1	0.17	0.39	1	1.2	2.0	-	-	-	-	-	8.0	15
											-	-	-	3.5	-	11.5	15
											-	-	-	-	1.0	9.0	15
											-	-	-	3.5	1.0	12.5	15
DHG0601D	208/230/1/60	1	27.1	178	1	1/3	2.6	1	1.0	6.9	-	-	-	-	-	43.3/43.3	70/70
											-	-	-	9.6/8.7	-	52.9/52.0	80/70
											-	-	-	-	2.2/1.9 (1.7/1.5)	45.5/45.2	70/70
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	55.1/53.9	80/80
DHG0603D	208/230/3/60	1	15.2	140	1	1/3	2.6	1	1.0	6.9	-	-	-	-	-	28.5/28.5	40/40
											-	-	-	9.6/8.7	-	38.1/37.2	50/50
											-	-	-	-	2.2/1.9 (1.7/1.5)	30.7/30.4	45/45
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	40.3/39.1	50/50
DHG0603W	208/230/3/60	1	15.2	140	1	1/3	2.6	1	2.3	7.7	-	-	-	-	-	29.3/29.3	40/40
											-	-	-	9.6/8.7	-	38.9/38.0	50/50
											-	-	-	-	2.2/1.9 (1.7/1.5)	31.5/31.2	45/45
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	41.1/39.9	50/50

Electrical Data


Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Electric Heat			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	Part #	KW*	FLA	FLA	FLA	MCA	MOP
DHG0604D	460/3/60	1	7.4	54.7	1	0.33	1.6	1	1.2	2.5	-	-	-	-	-	13.3	20
											-	-	-	4.3	-	17.6	20
											-	-	-	-	0.9 (0.5)	14.2	20
											-	-	-	4.3	0.9 (0.5)	18.5	25
DHG0604W	460/3/60	1	7.4	54.7	1	0.33	1.6	1	2.3	4.5	-	-	-	-	-	15.3	20
											-	-	-	4.3	-	19.6	25
											-	-	-	-	0.9 (0.5)	16.2	20
											-	-	-	4.3	0.9 (0.5)	20.5	25
DHG0607D	575/3/60	1	5.6	47.8	1	1/3	1.14	1	1.2	2.0	-	-	-	-	-	10.2	15
											-	-	-	3.5	-	13.7	15
											-	-	-	-	1.0	11.2	15
											-	-	-	3.5	1.0	14.7	20
DHG0607W	575/3/60	1	5.6	47.8	1	1/3	1.14	1	2.3	3.8	-	-	-	-	-	12.0	15
											-	-	-	3.5	-	15.5	20
											-	-	-	-	1.0	13.0	15
											-	-	-	3.5	1.0	16.5	20
DHG0723D	208/230/3/60	1	16.1	155	1	0.33	2.0	1	1.2	5.0	-	-	-	-	-	27.2/27.2	40/40
											-	-	-	9.6/8.7	-	36.8/35.9	50/50
											-	-	-	-	2.2/1.9 (1.7/1.5)	29.4/29.1	40/40
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	39.0/37.8	50/50
DHG0723W	208/230/3/60	1	16.1	155	1	0.33	2.0	1	2.3	7.7	-	-	-	-	-	29.9/29.9	45/45
											-	-	-	9.6/8.7	-	39.5/38.6	50/50
											-	-	-	-	2.2/1.9 (1.7/1.5)	32.1/31.8	45/45
											-	-	-	9.6/8.7	2.2/1.9 (1.7/1.5)	41.7/40.5	50/50
DHG0724D	460/3/60	1	7.0	70.8	1	0.33	0.85	1	1.2	2.5	-	-	-	-	-	12.2	15
											-	-	-	4.3	-	16.5	20
											-	-	-	-	0.9 (0.5)	13.1	15
											-	-	-	4.3	0.9 (0.5)	17.4	20
DHG0724W	460/3/60	1	7.0	70.8	1	0.33	0.85	1	2.3	4.5	-	-	-	-	-	14.2	20
											-	-	-	4.3	-	18.5	25
											-	-	-	-	0.9 (0.5)	15.1	20
											-	-	-	4.3	0.9 (0.5)	19.4	25
DHG0727D	575/3/60	1	6.0	58.2	1	0.33	0.67	1	1.2	2.0	-	-	-	-	-	10.2	15
											-	-	-	3.5	-	13.7	15
											-	-	-	-	1.0	11.2	15
											-	-	-	3.5	1.0	14.7	20
DHG0727W	575/3/60	1	6.0	58.2	1	0.33	0.67	1	2.3	3.8	-	-	-	-	-	12.0	15
											-	-	-	3.5	-	15.5	20
											-	-	-	-	1.0	13.0	15
											-	-	-	3.5	1.0	16.5	20

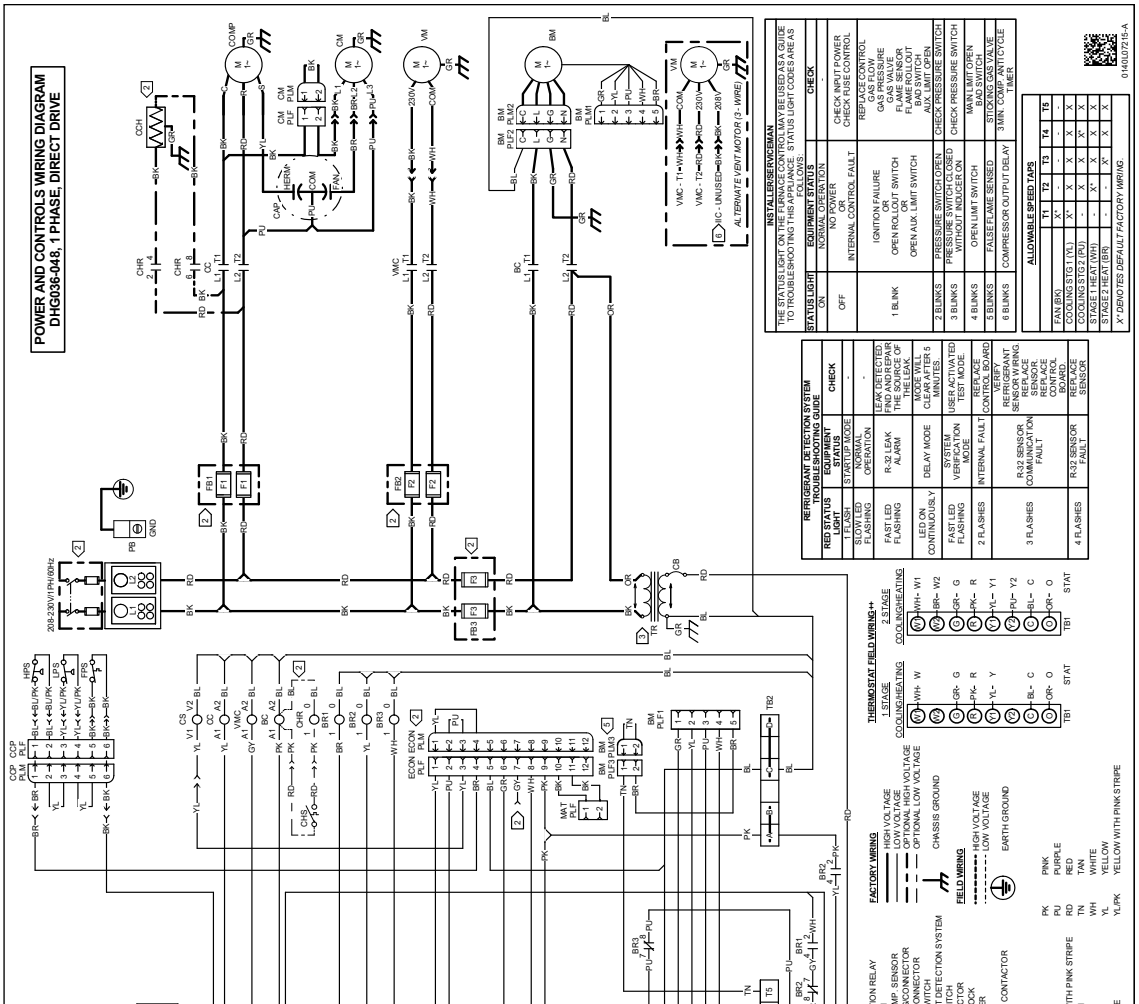

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.


WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

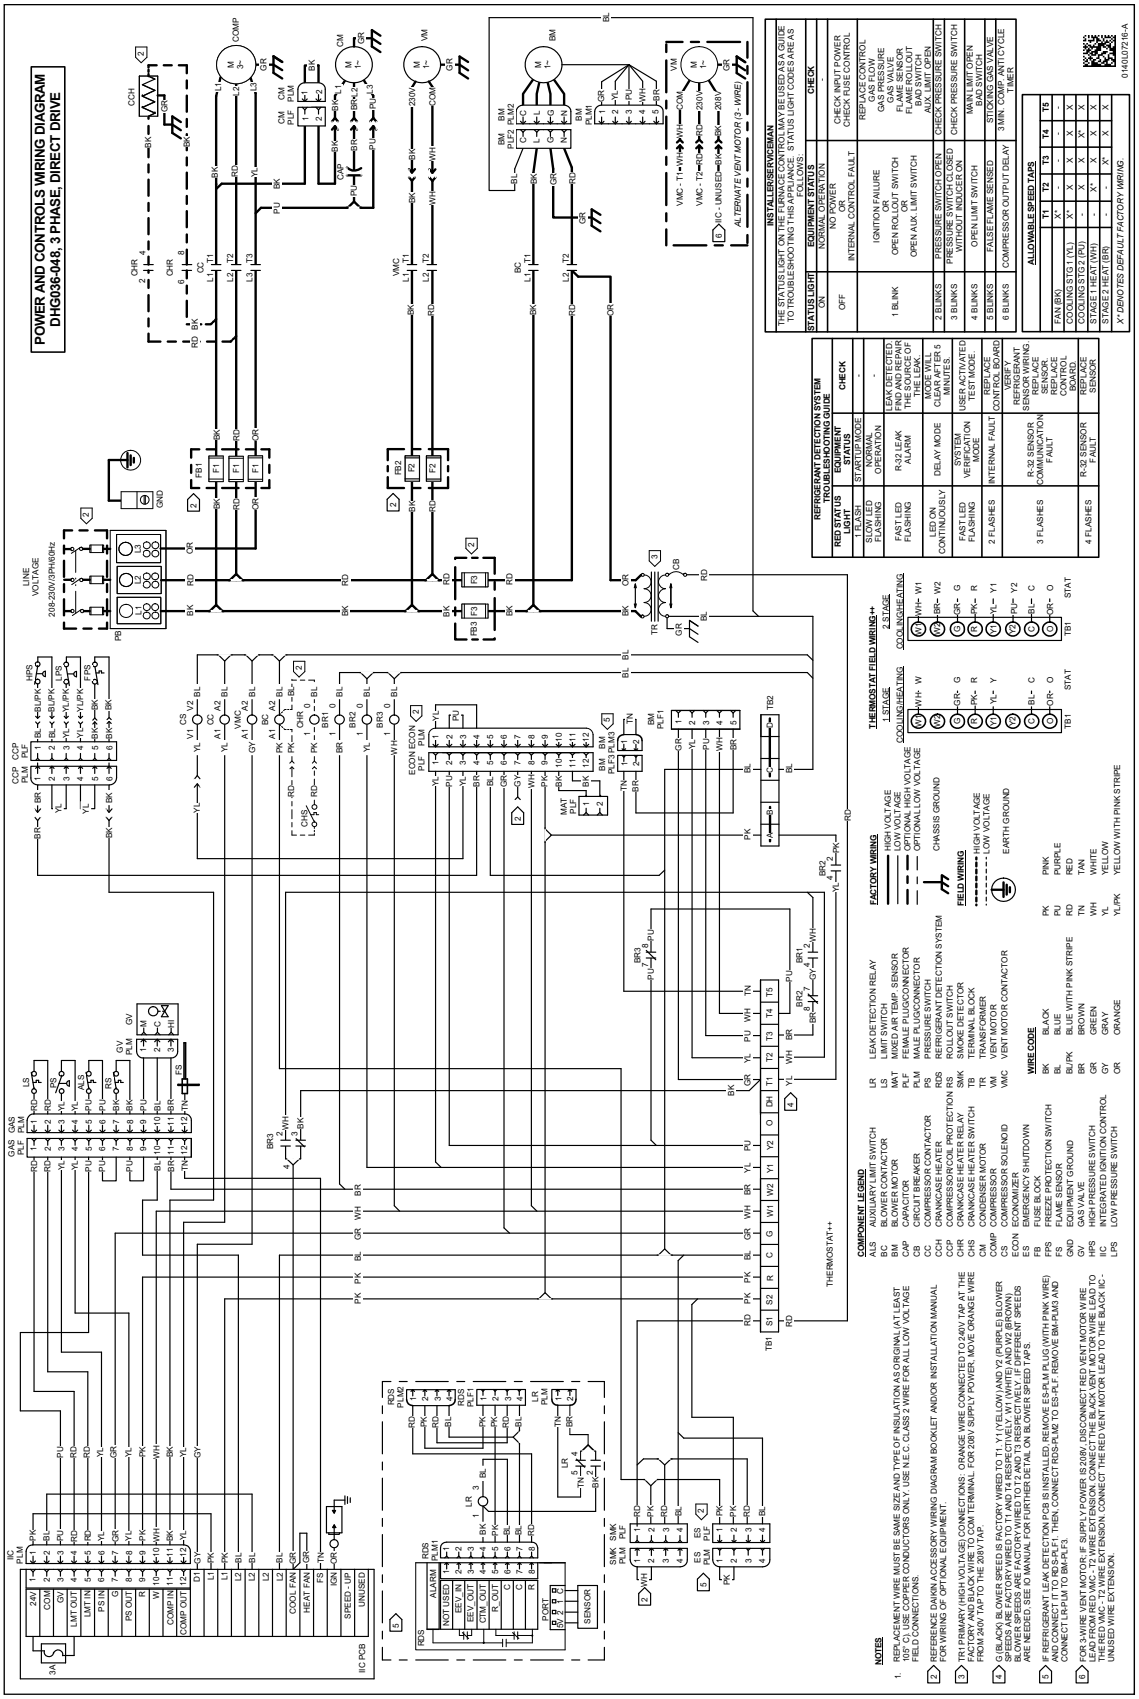

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.


WARNING *High Voltage:* Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

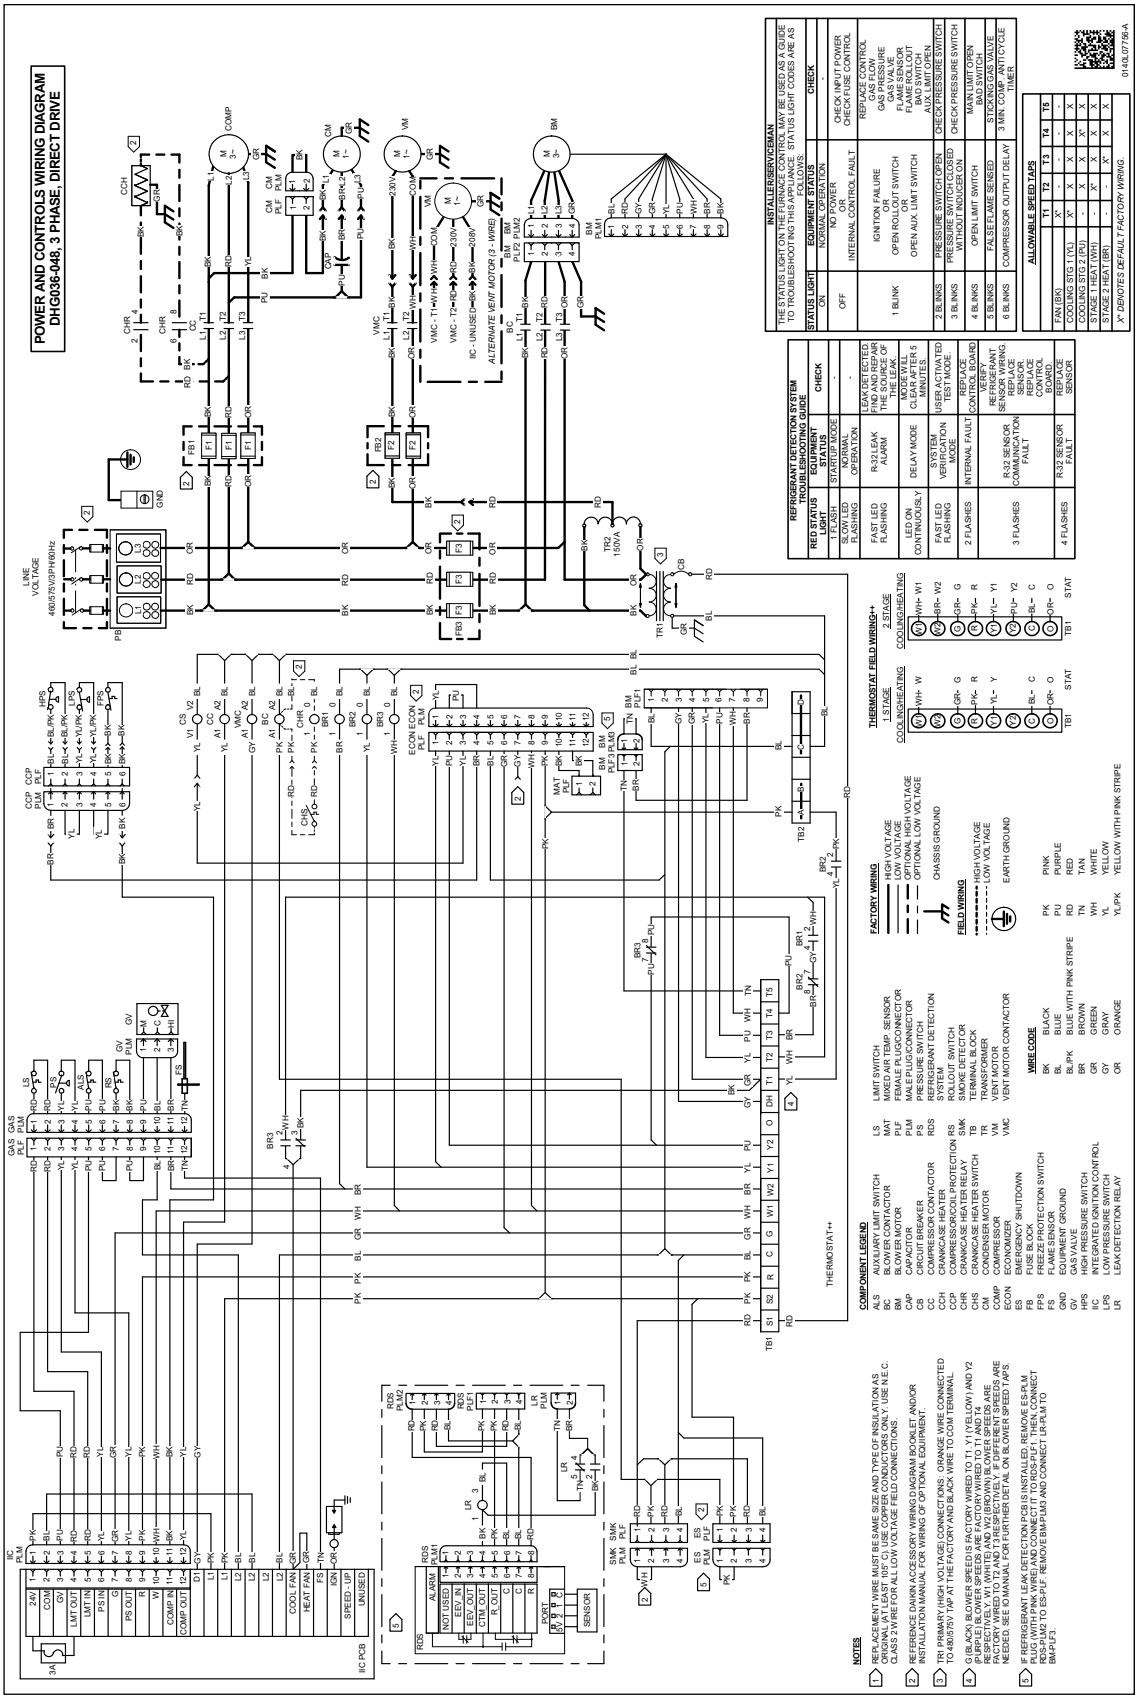

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

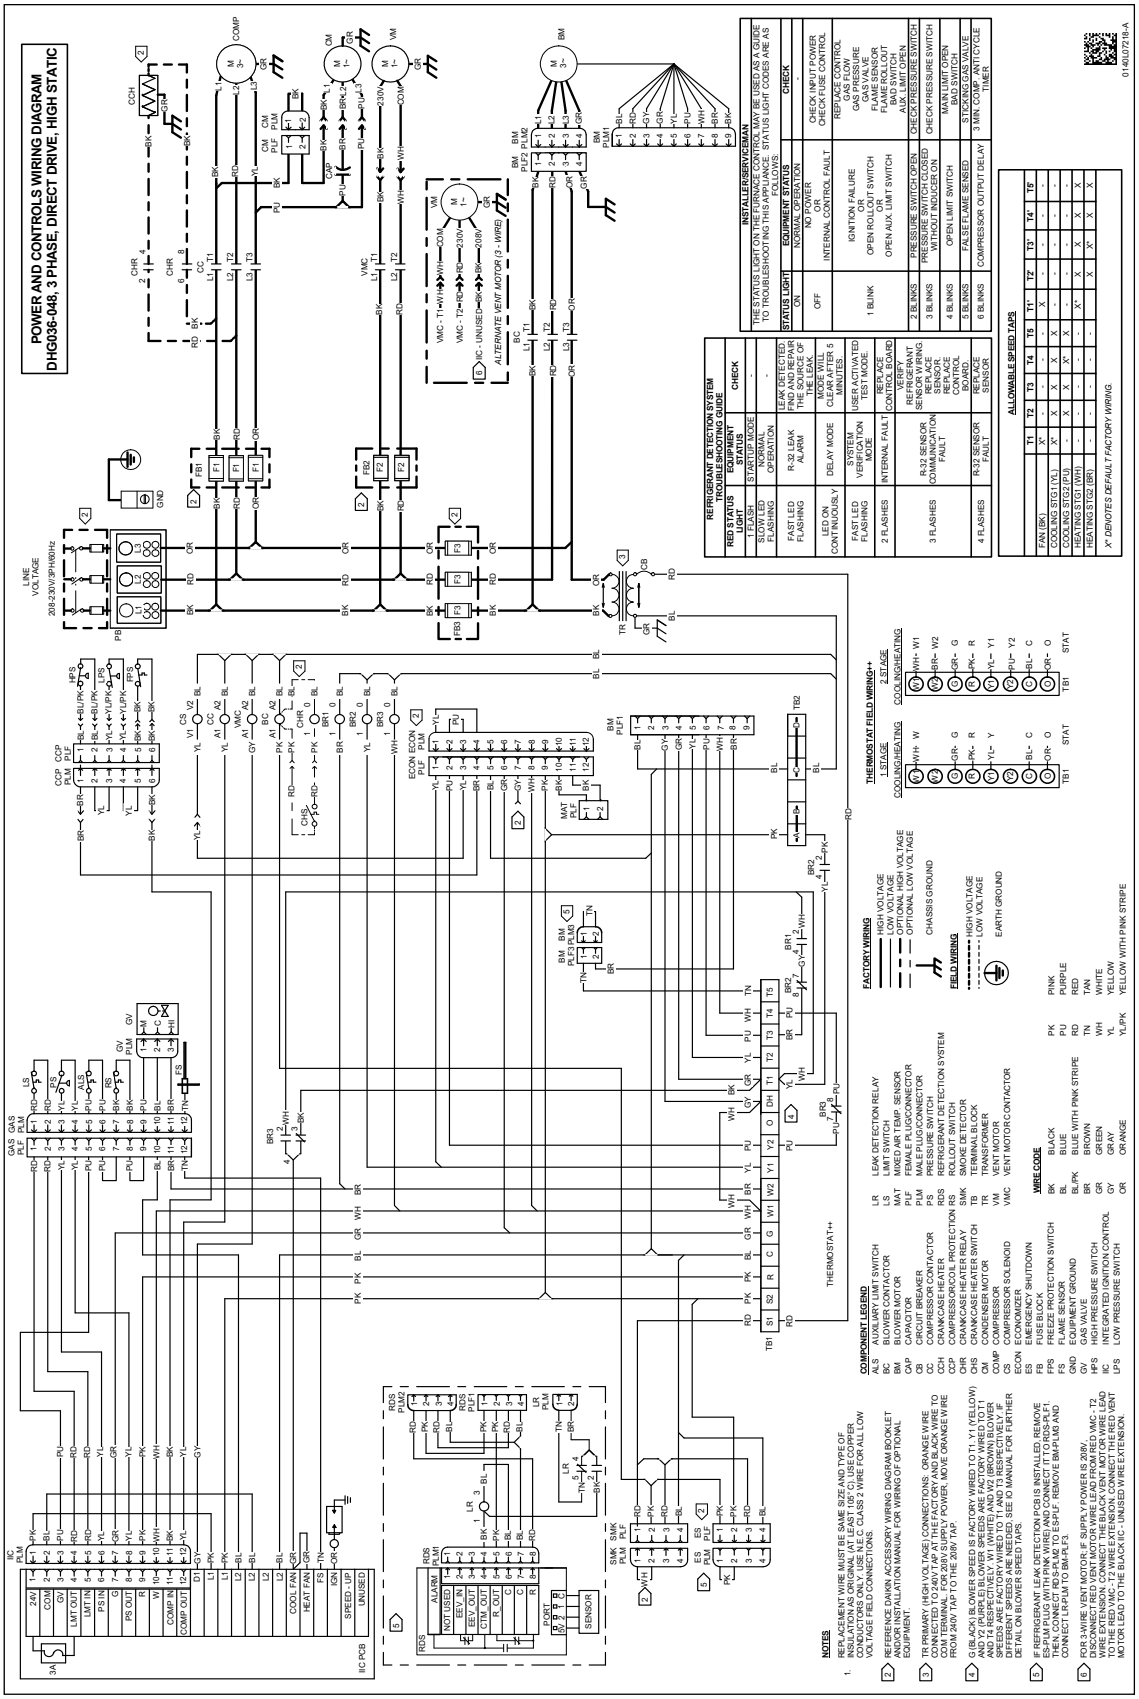


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

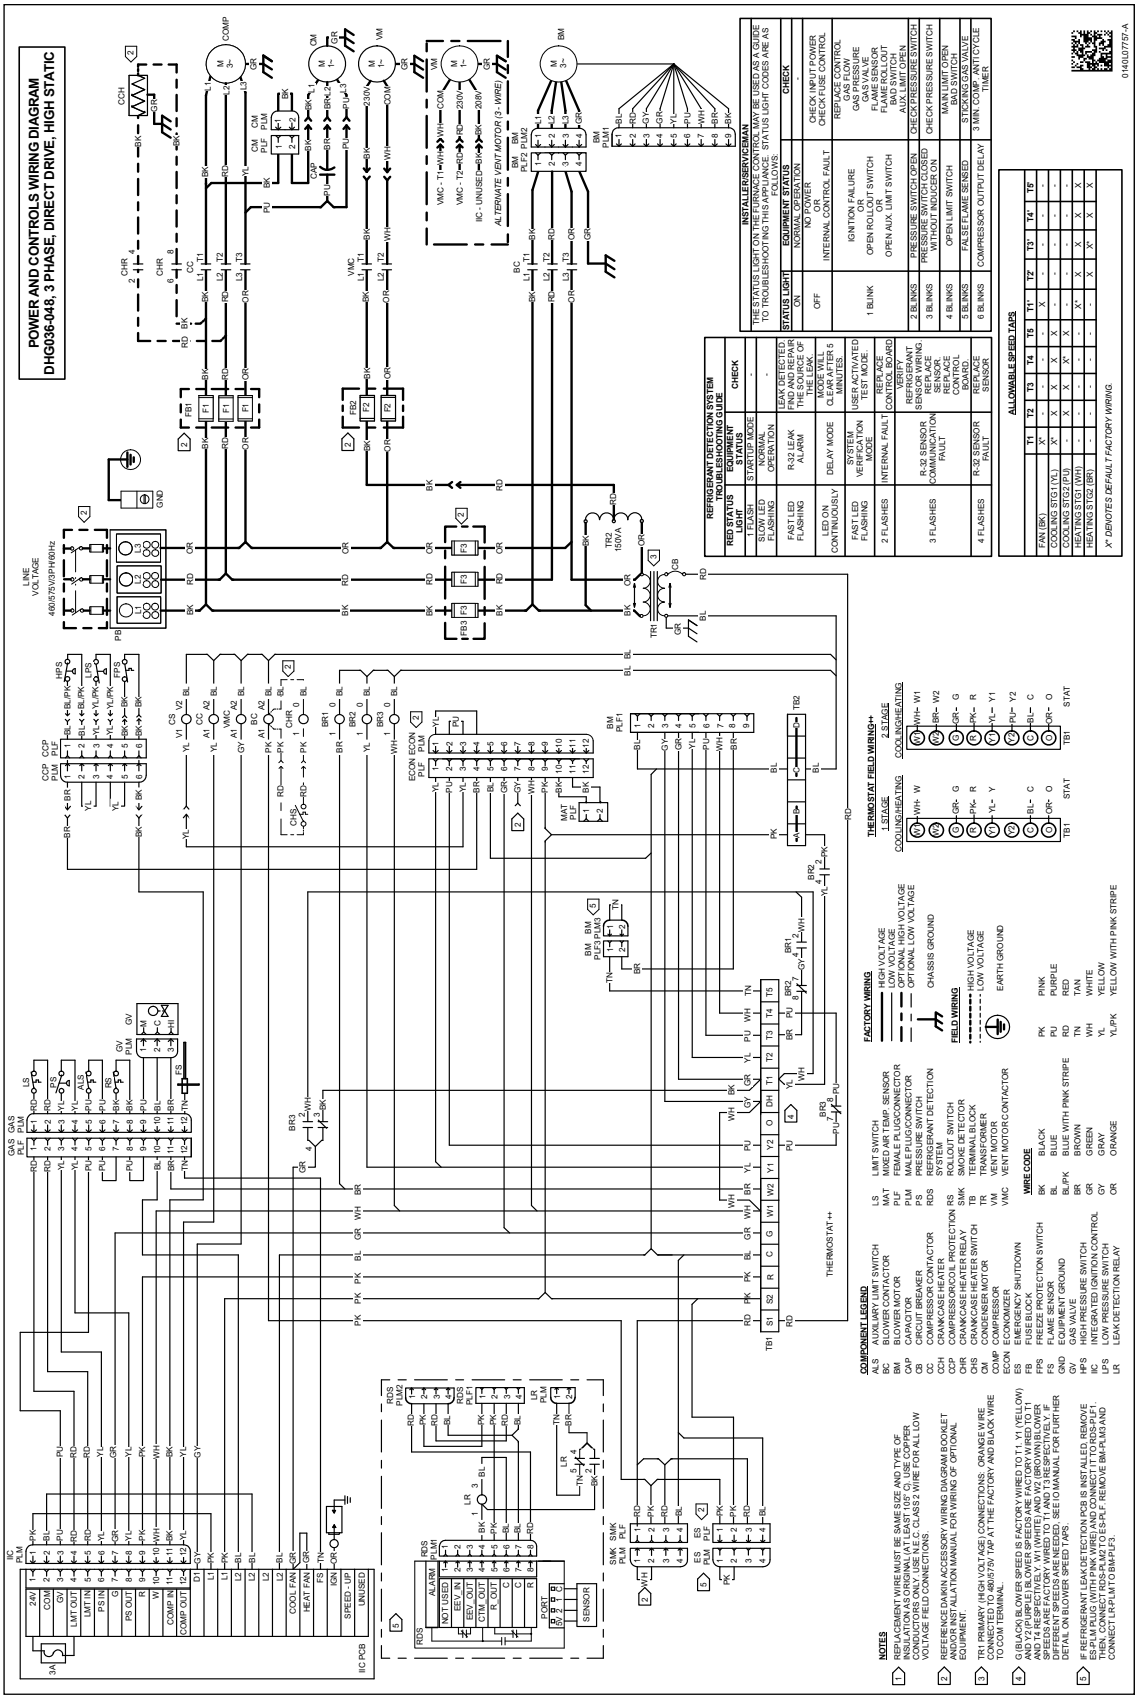
POWER AND CONTROLS WIRING DIAGRAM
DHG036-048, 3 PHASE, DIRECT DRIVE, HIGH STATIC
LINE VOLTAGE
460/575V/3PH/60Hz
NOTES
COMPONENT LEGEND
FACTORY WIRING
FIELD WIRING
WIRE CODE
THERMOSTAT** 2 STAGE
THERMOSTAT** 1 STAGE
REFRIGERANT DETECTION SYSTEM TROUBLESHOOTING GUIDE
ALLOWABLE SPEED TAPS
INSTALLER/SERVICEMAN
Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.
WARNING
Hot Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

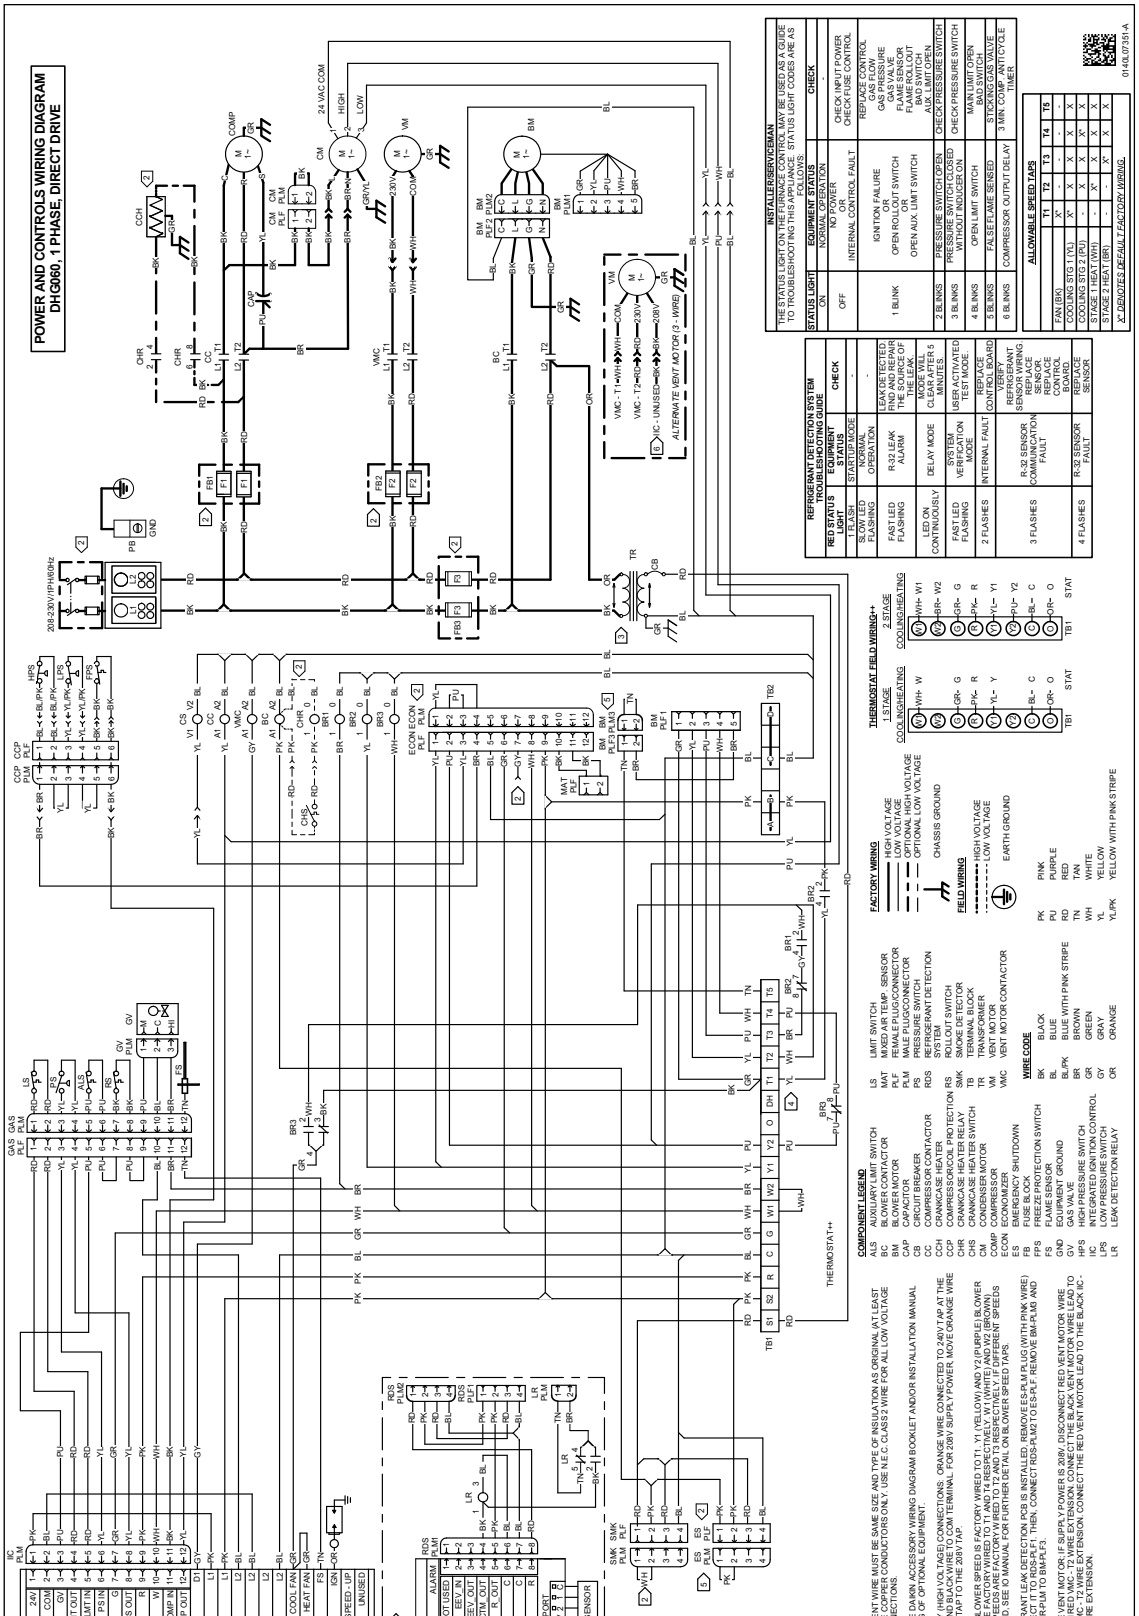

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.


☐ WARNING | *High Voltage:* Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death. ☐

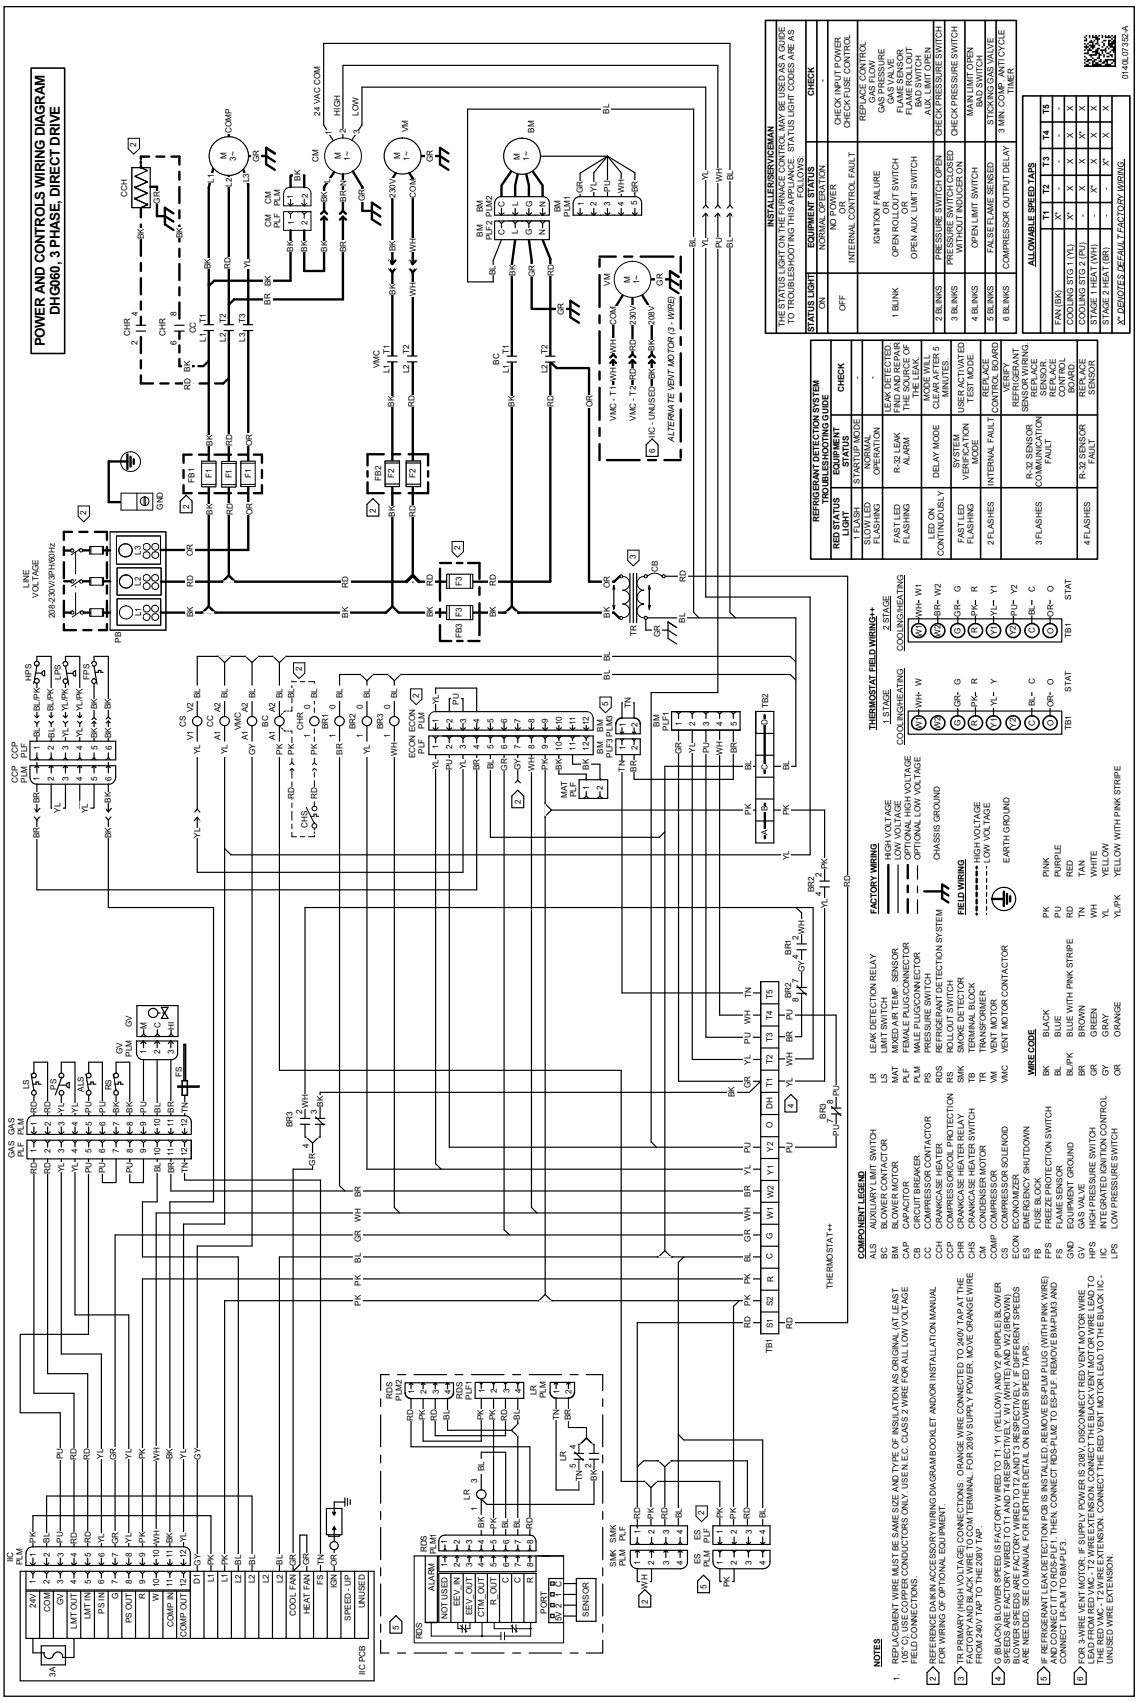

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.


WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

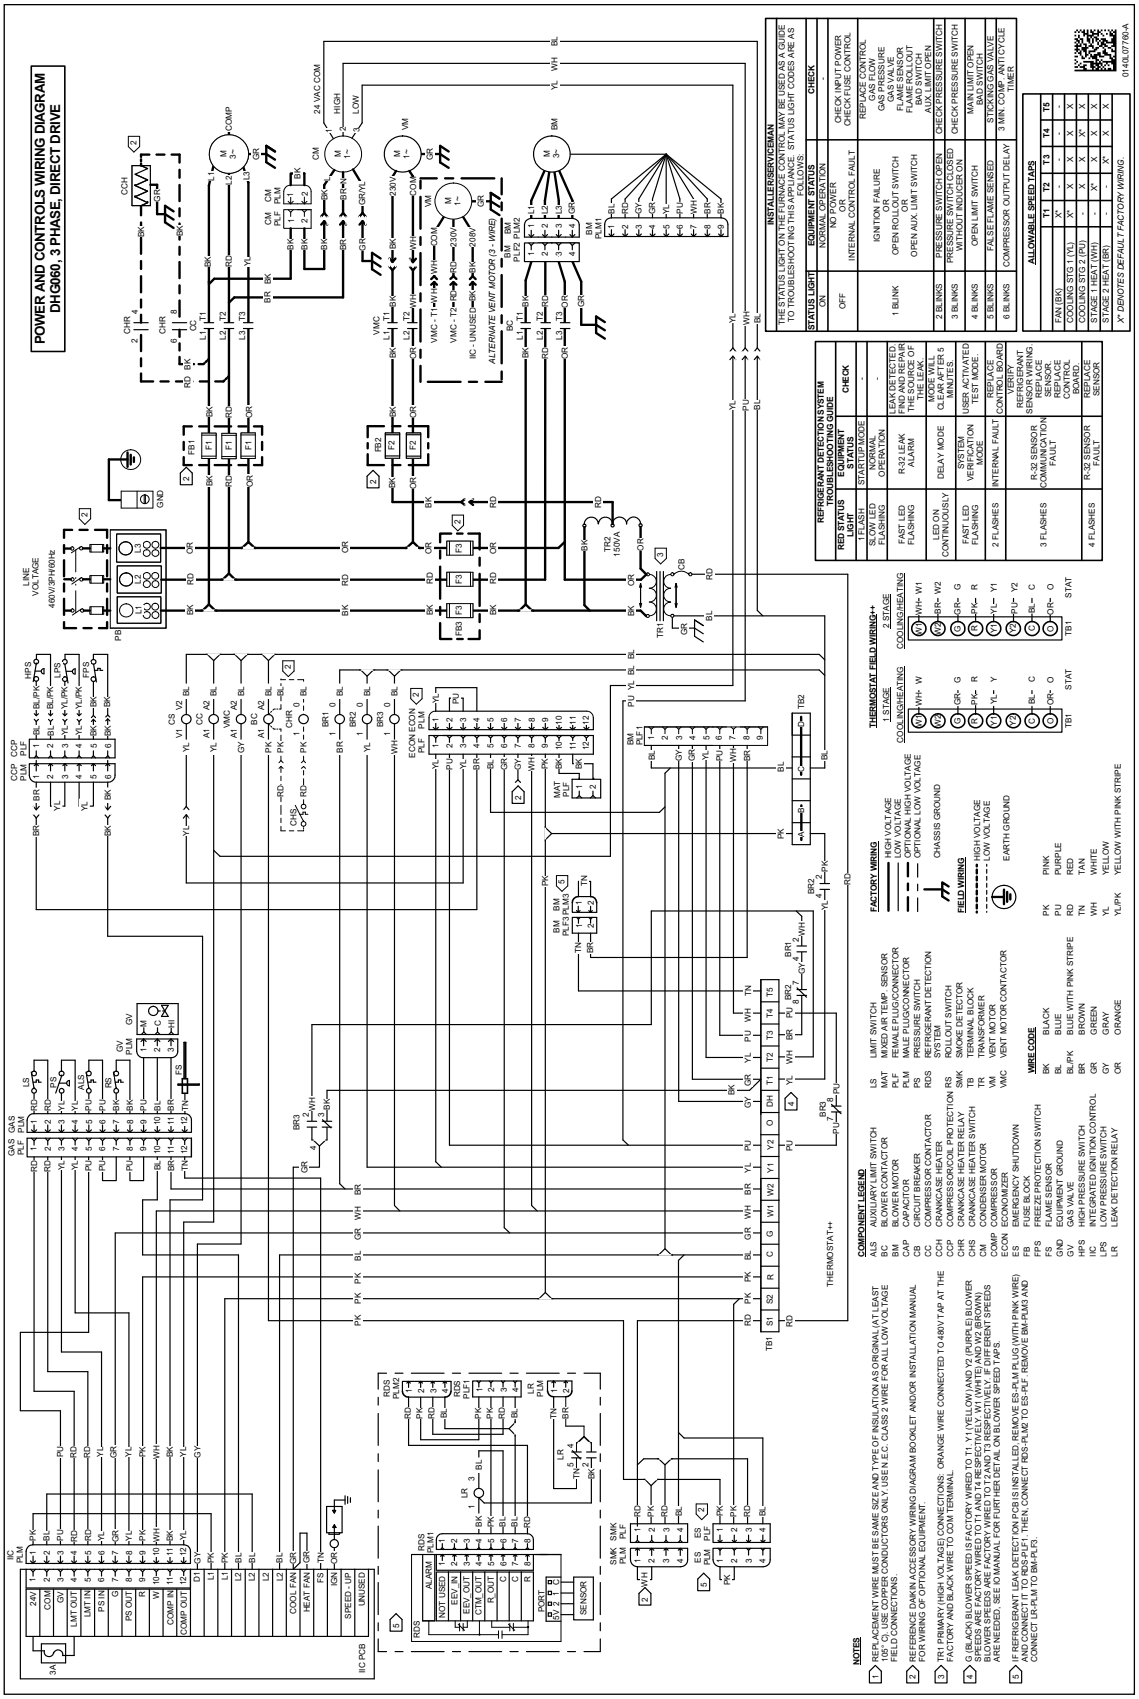

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.


WARNING — *High Voltage:* Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

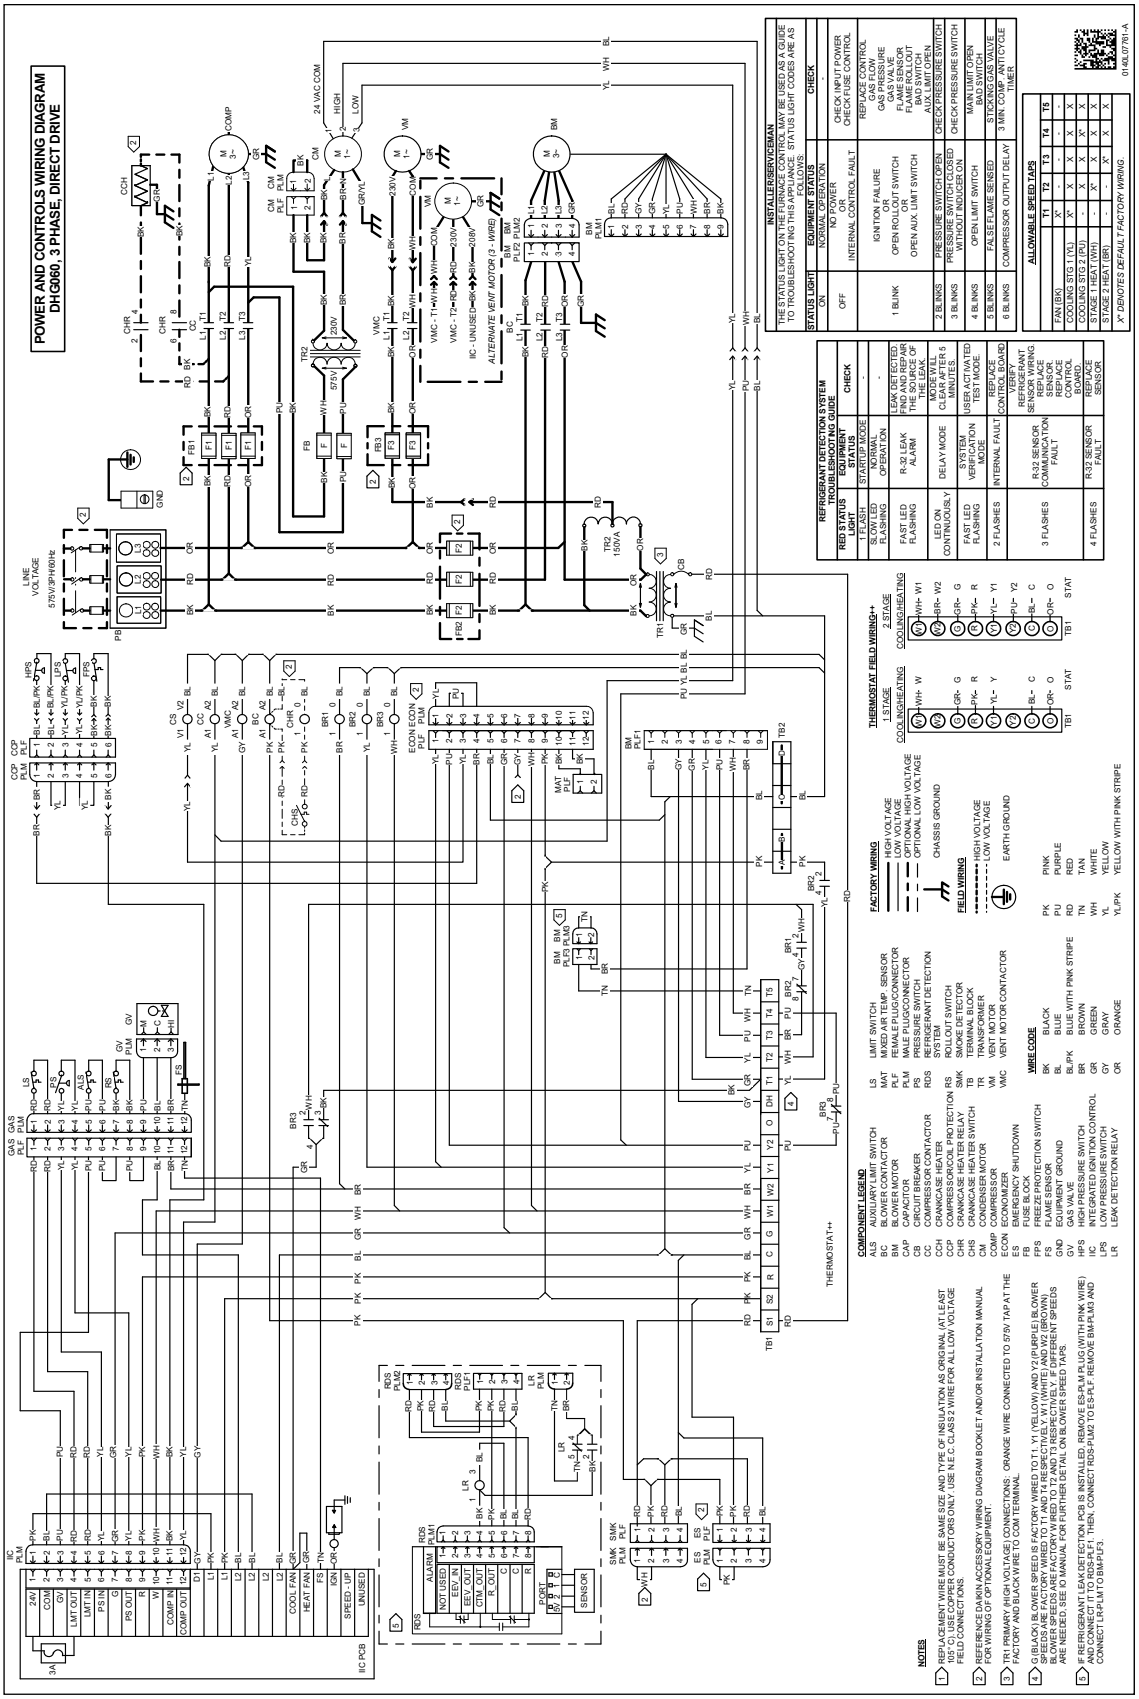


WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

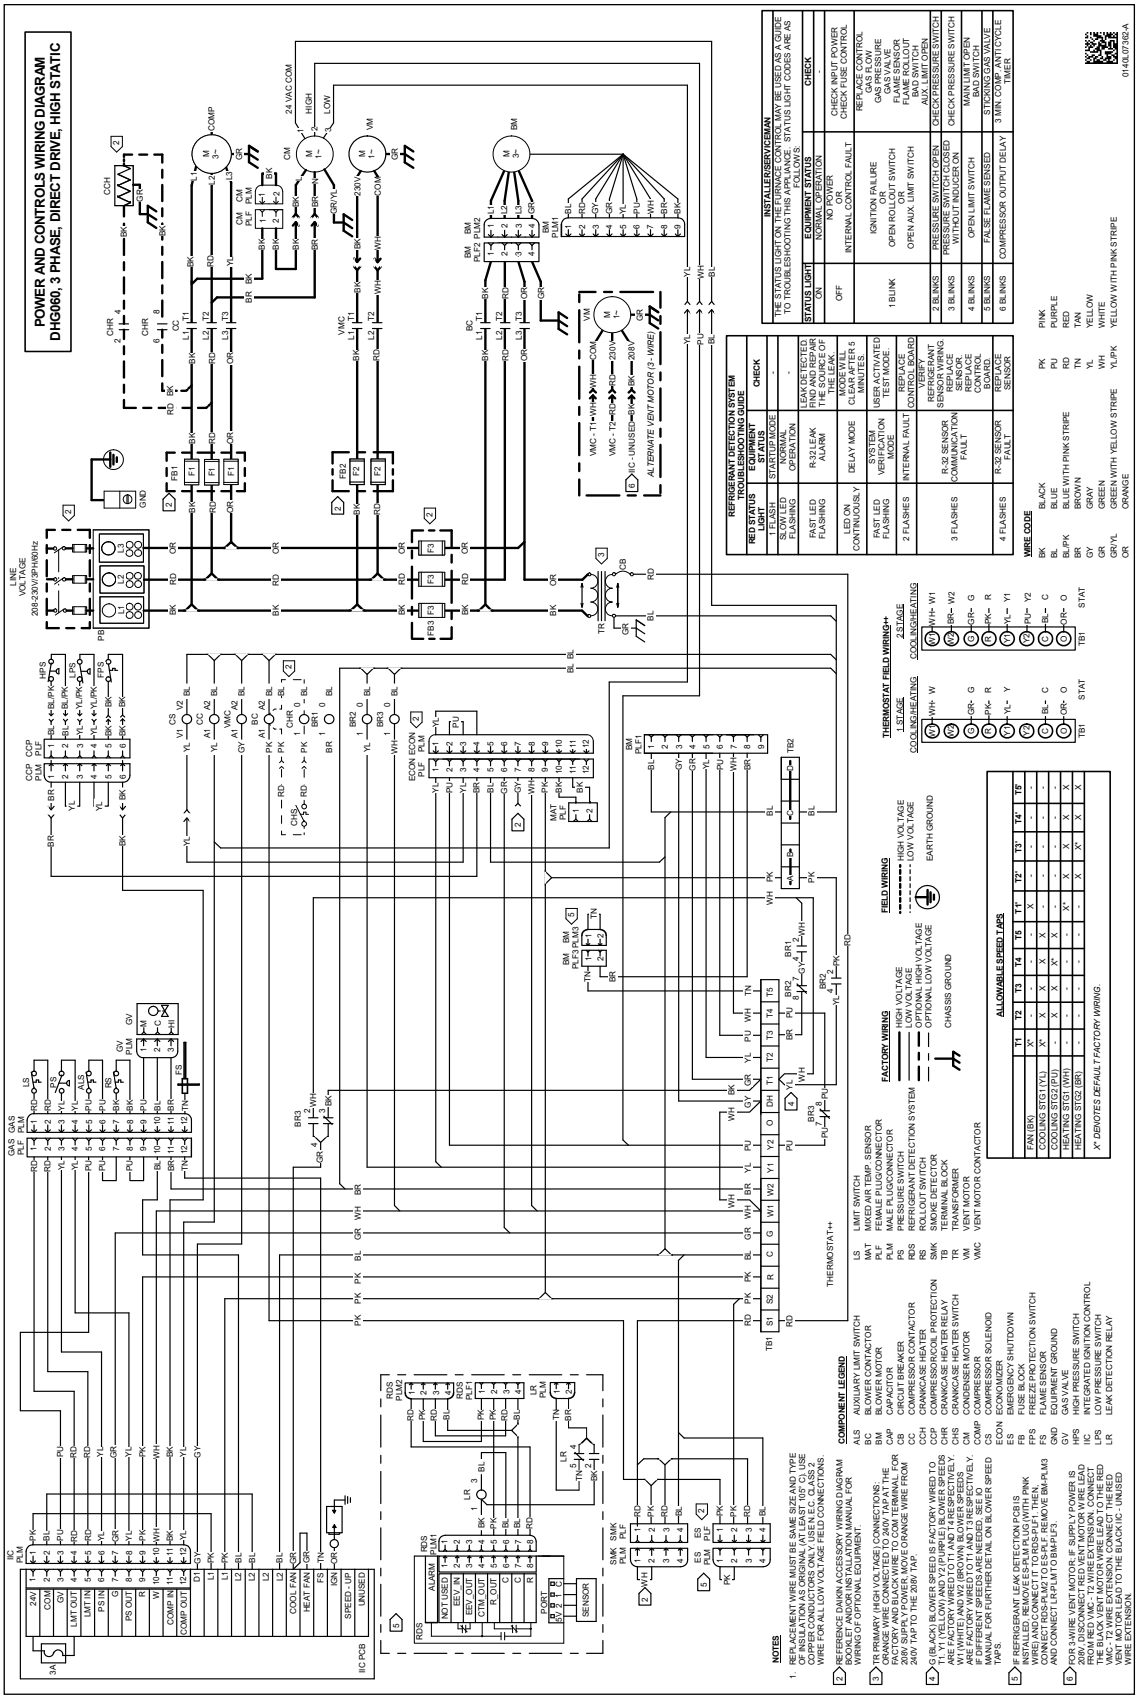

POWER AND CONTROLS WIRING DIAGRAM
DHG060, 3 PHASE, DIRECT DRIVE, HIGH STATIC
LINE VOLTAGE
208-230V/3PH/60Hz
NOTES
COMPONENT LEGEND
FACTORY WIRING
FIELD WIRING
THERMOSTAT FIELD WIRING
REFRIGERANT DETECTION SYSTEM TROUBLESHOOTING GUIDE
INSTALLER/SERVICEMAN
WIRE CODE
ALLOWABLE SPEED TAPS
WARNING
High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.
Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.
01410L07382-A

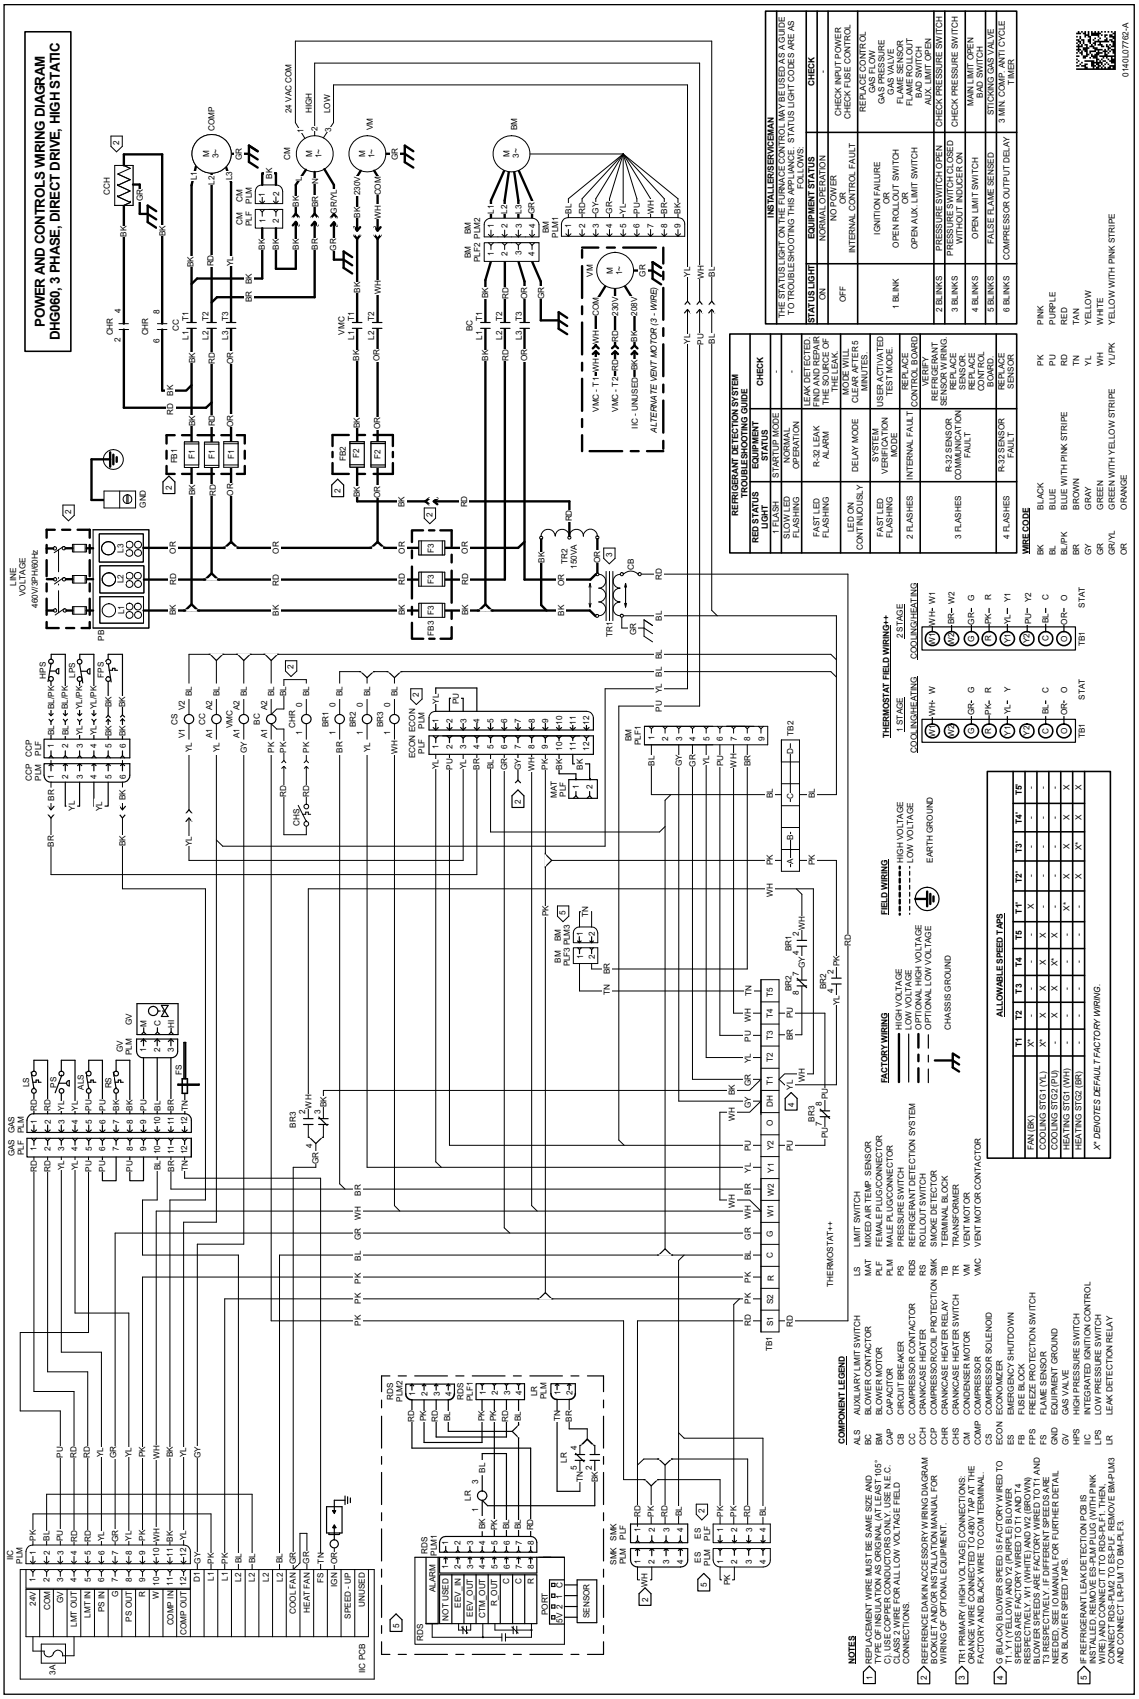

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

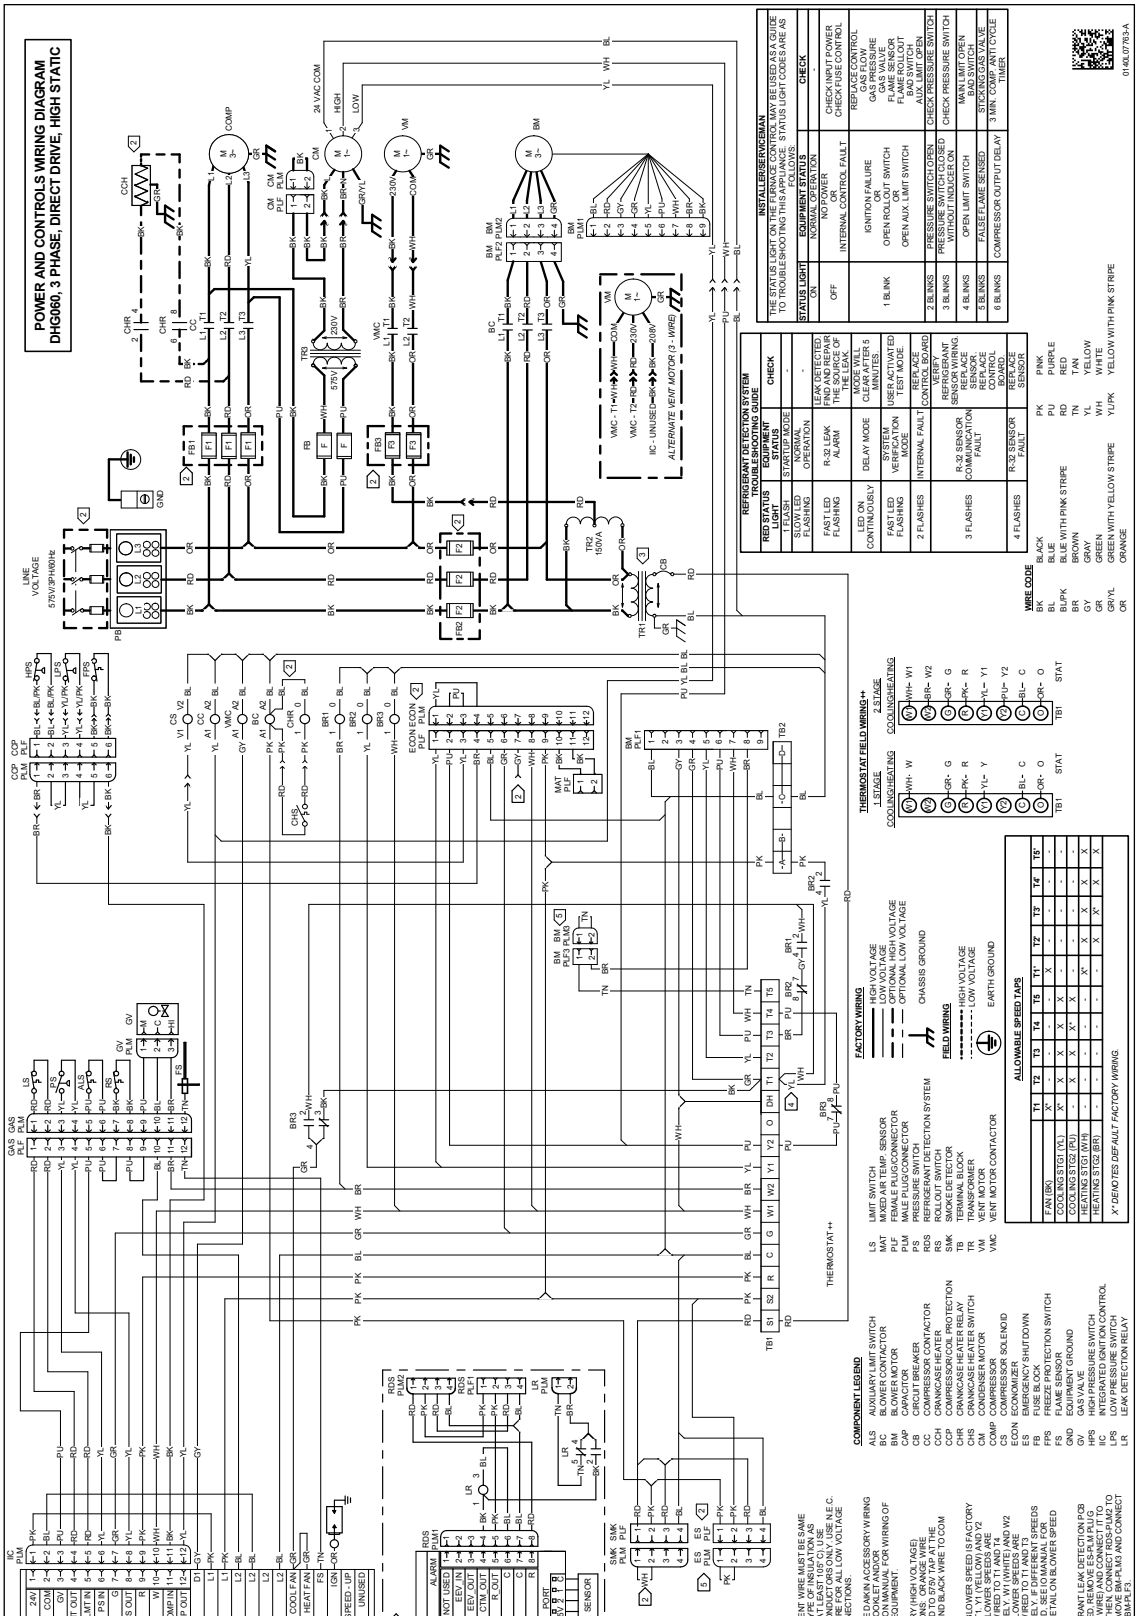


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

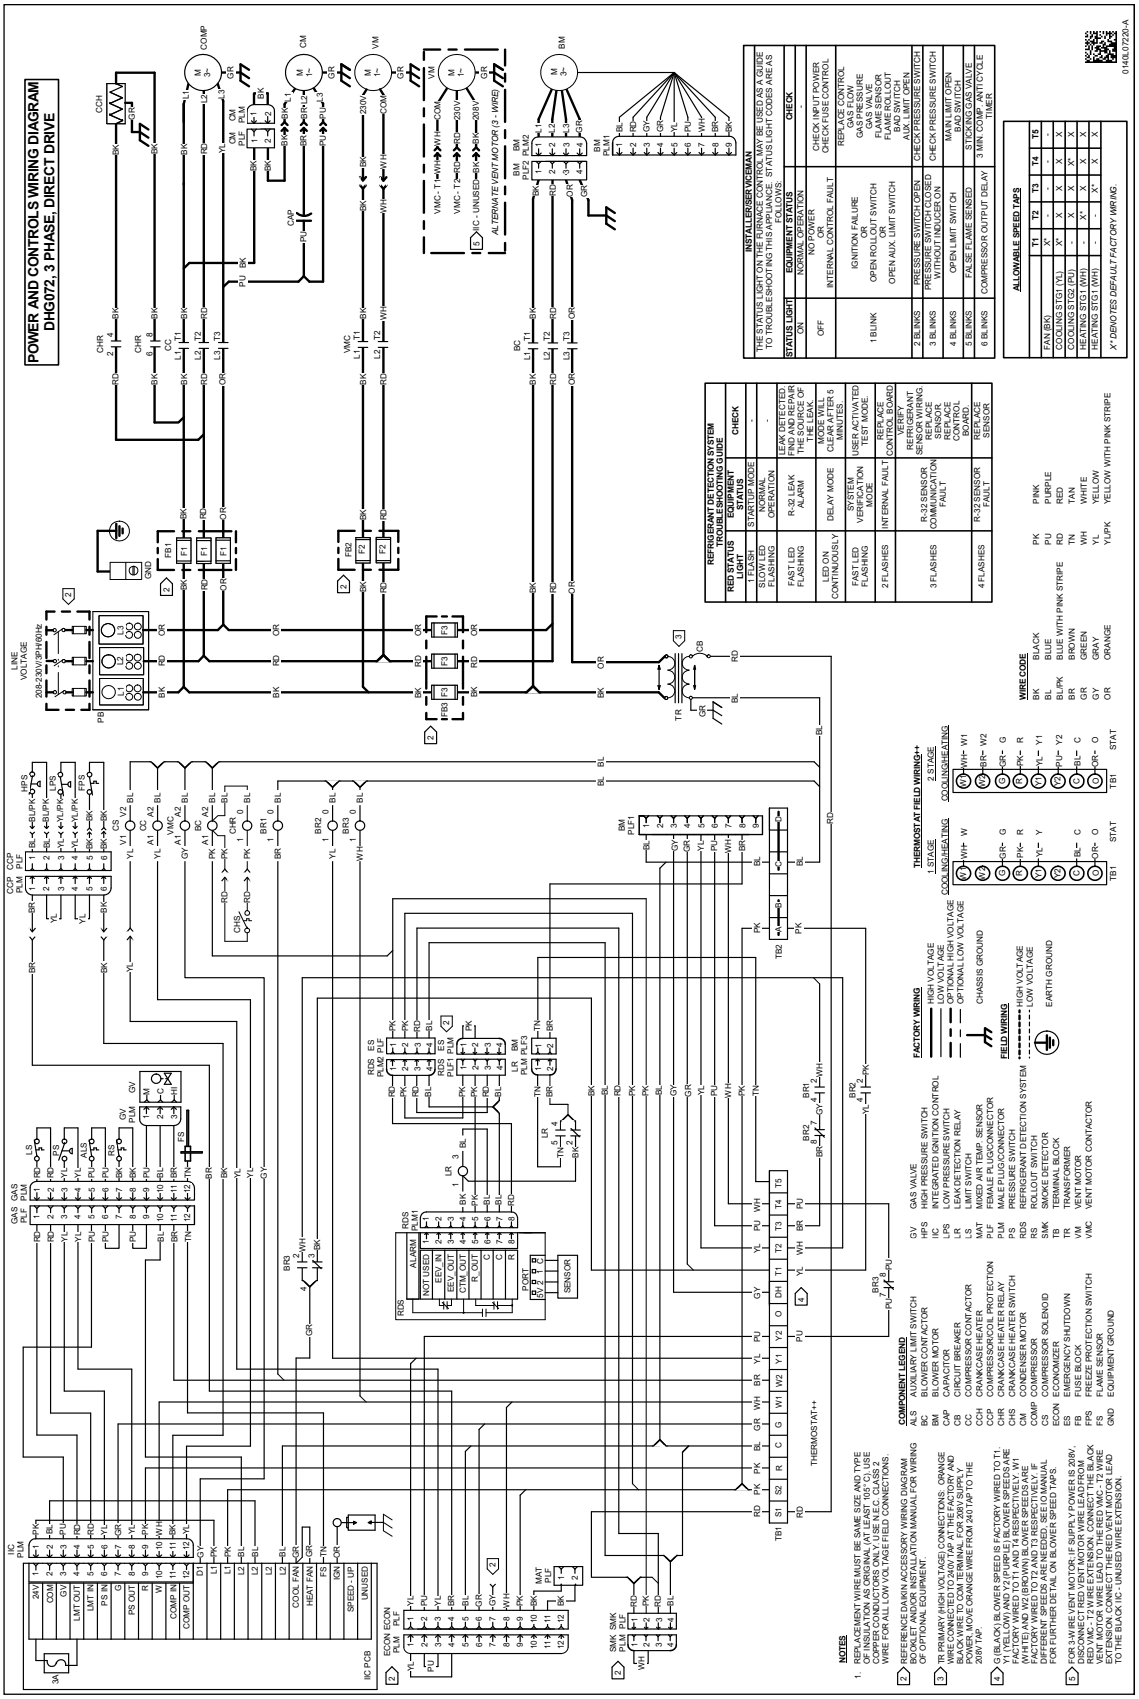

POWER AND CONTROLS WIRING DIAGRAM
DHG072, 3 PHASE, DIRECT DRIVE
LINE VOLTAGE
208-230V/3PH/60Hz
IIC PCB
ECON
SMK
THERMOSTAT++
TB1
TB2
BM
BC
VMC
CCH
CHR
CAP
CM
COMP
VIM
TR
REFRIGERANT DETECTION SYSTEM TROUBLESHOOTING GUIDE
INSTALLER/SERVICEMAN
ALLOWABLE SPEED TAPS
WIRE CODE
FACTORY WIRING
FIELD WIRING
COMPONENT LEGEND
NOTES
High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.
WARNING
Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

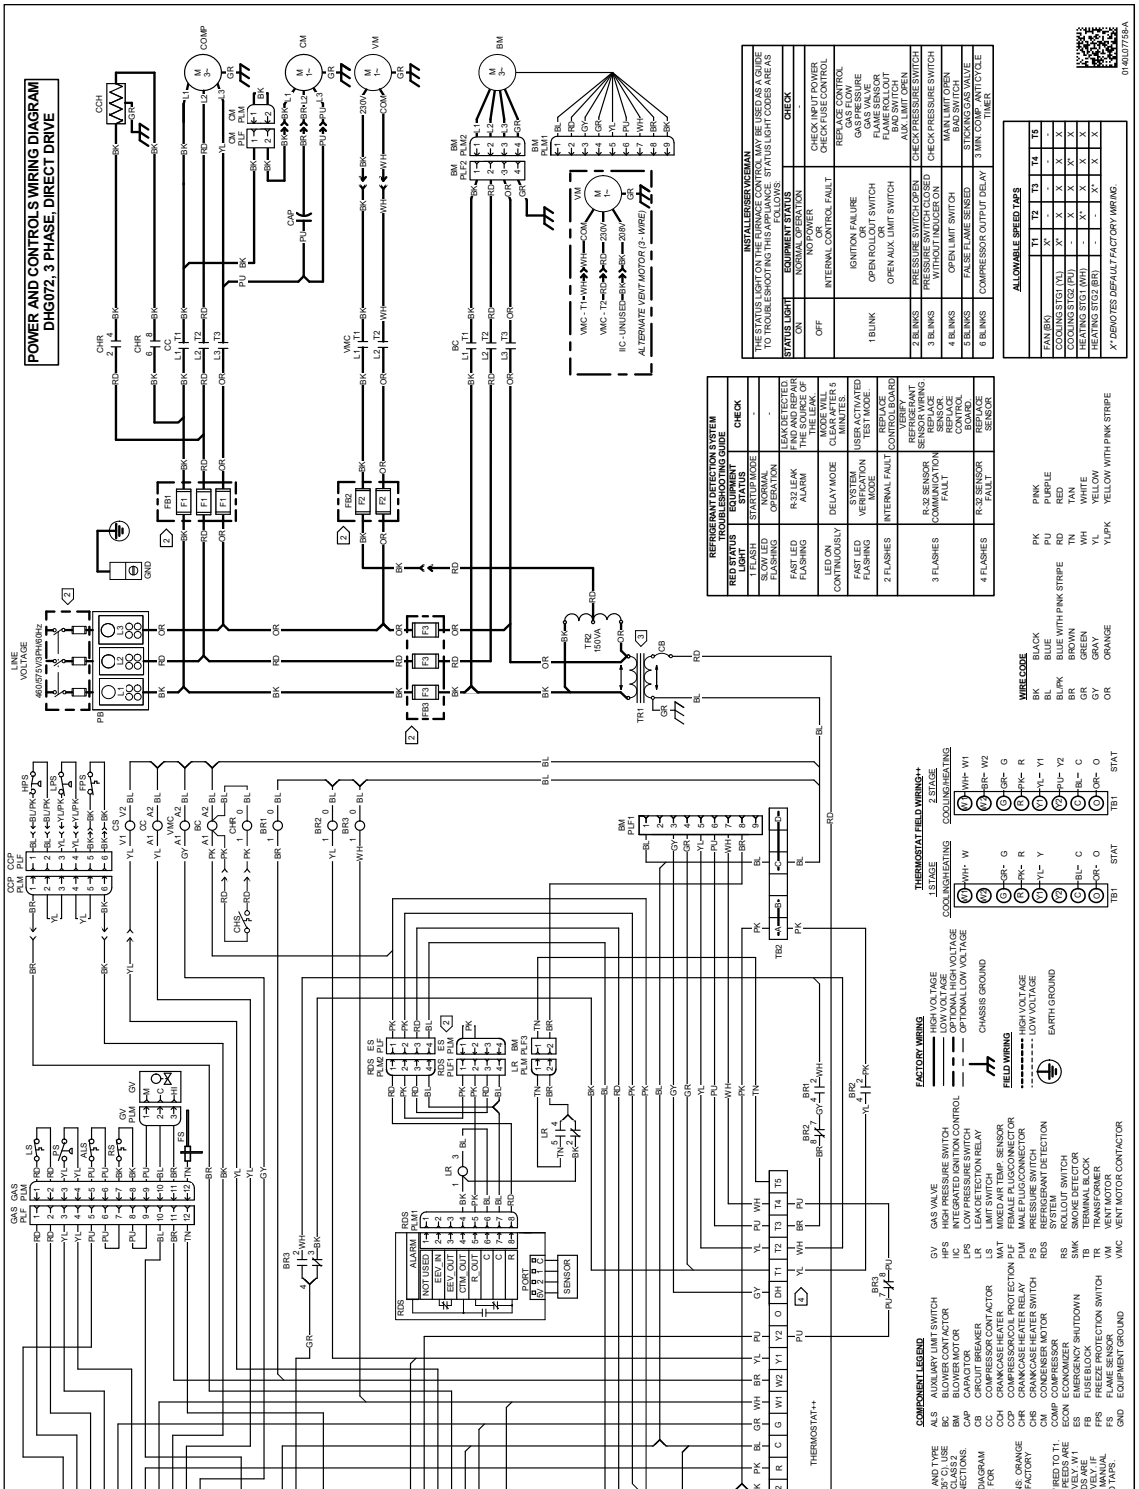


WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

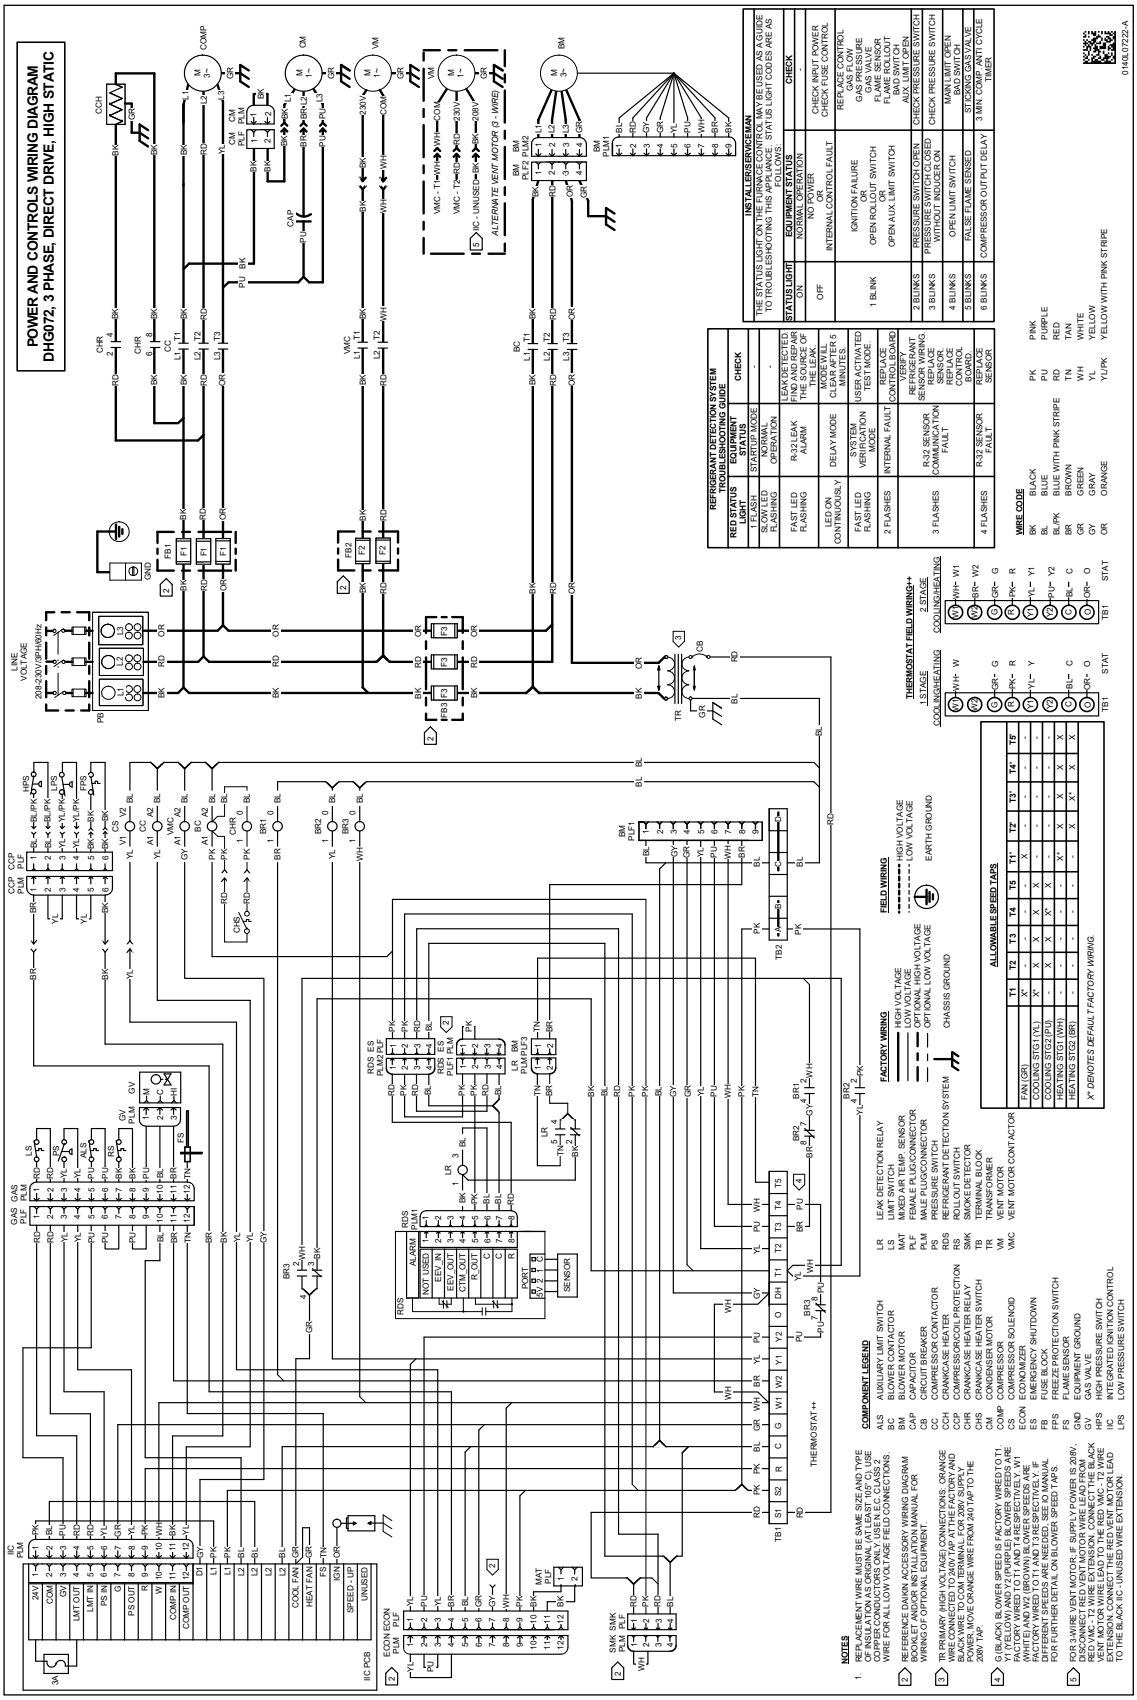

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

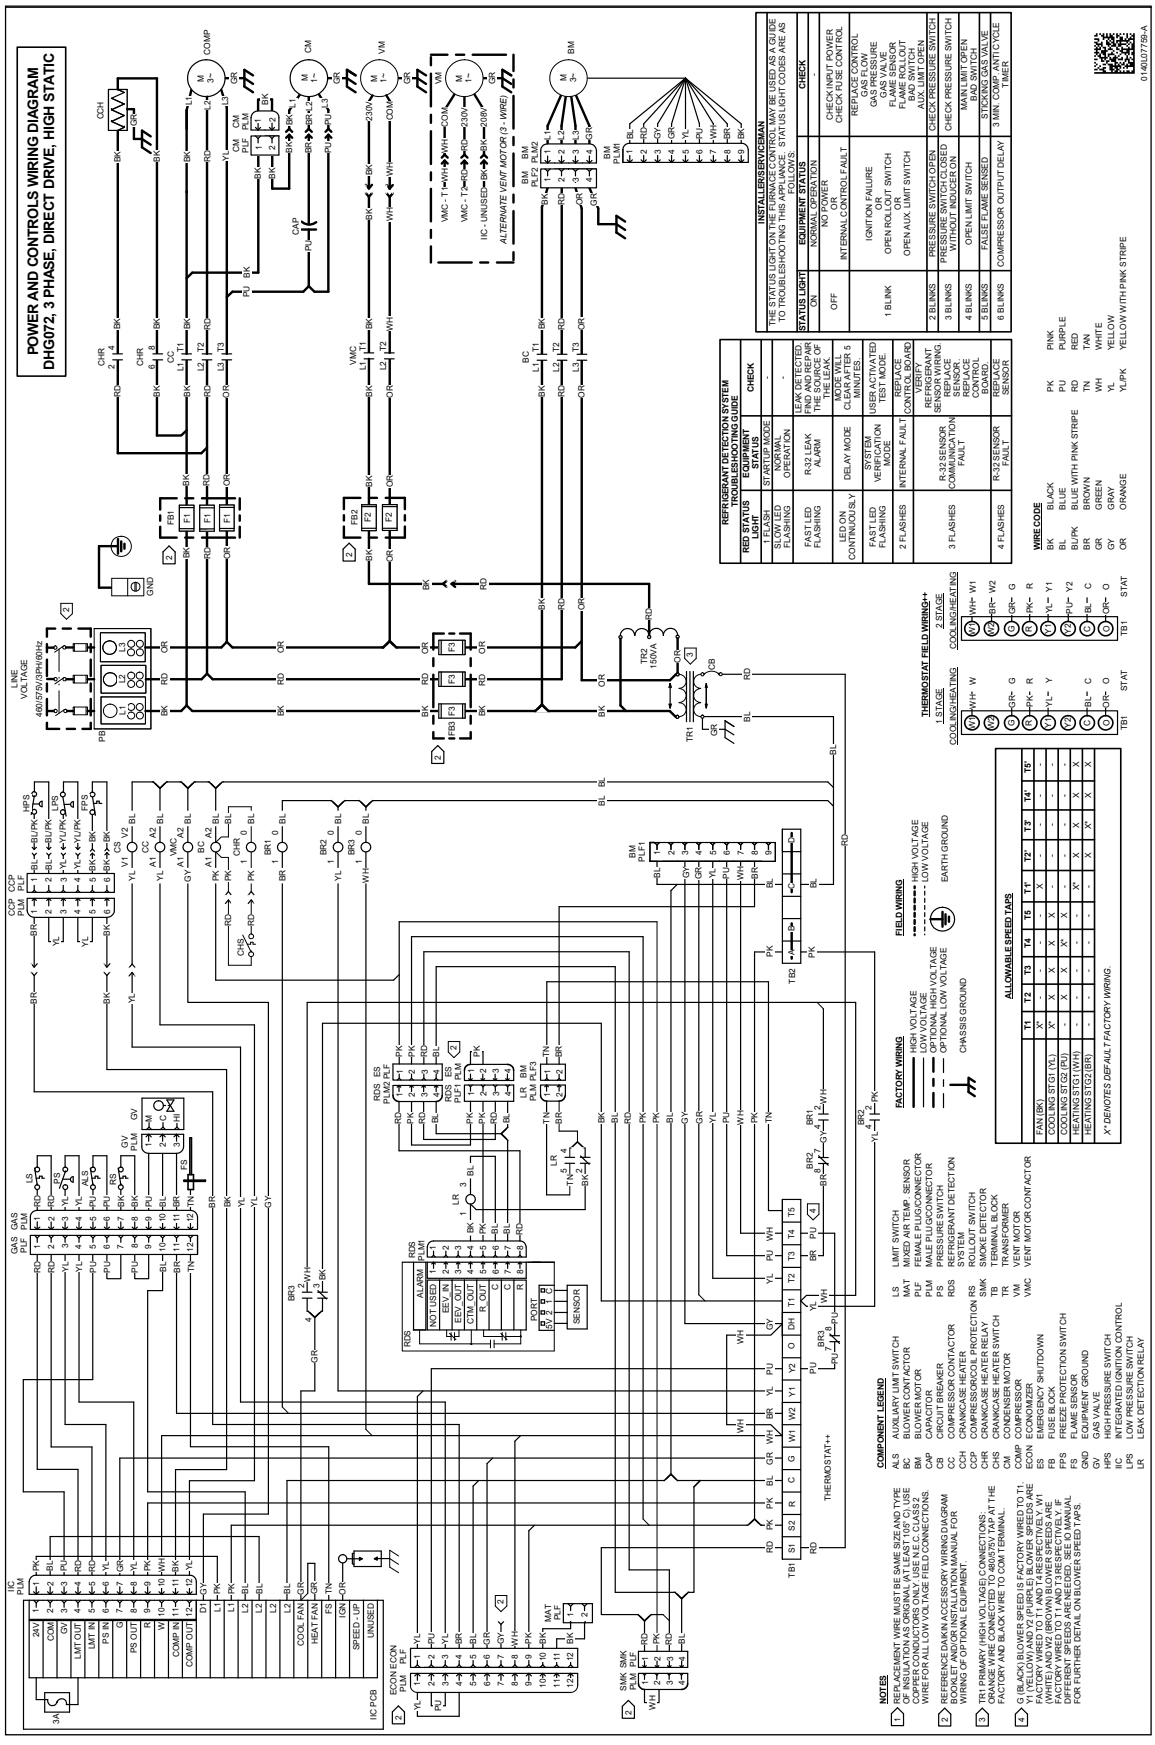

POWER AND CONTROLS WIRING DIAGRAM
DHG072, 3 PHASE, DIRECT DRIVE, HIGH STATIC
WARNING
High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.
Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

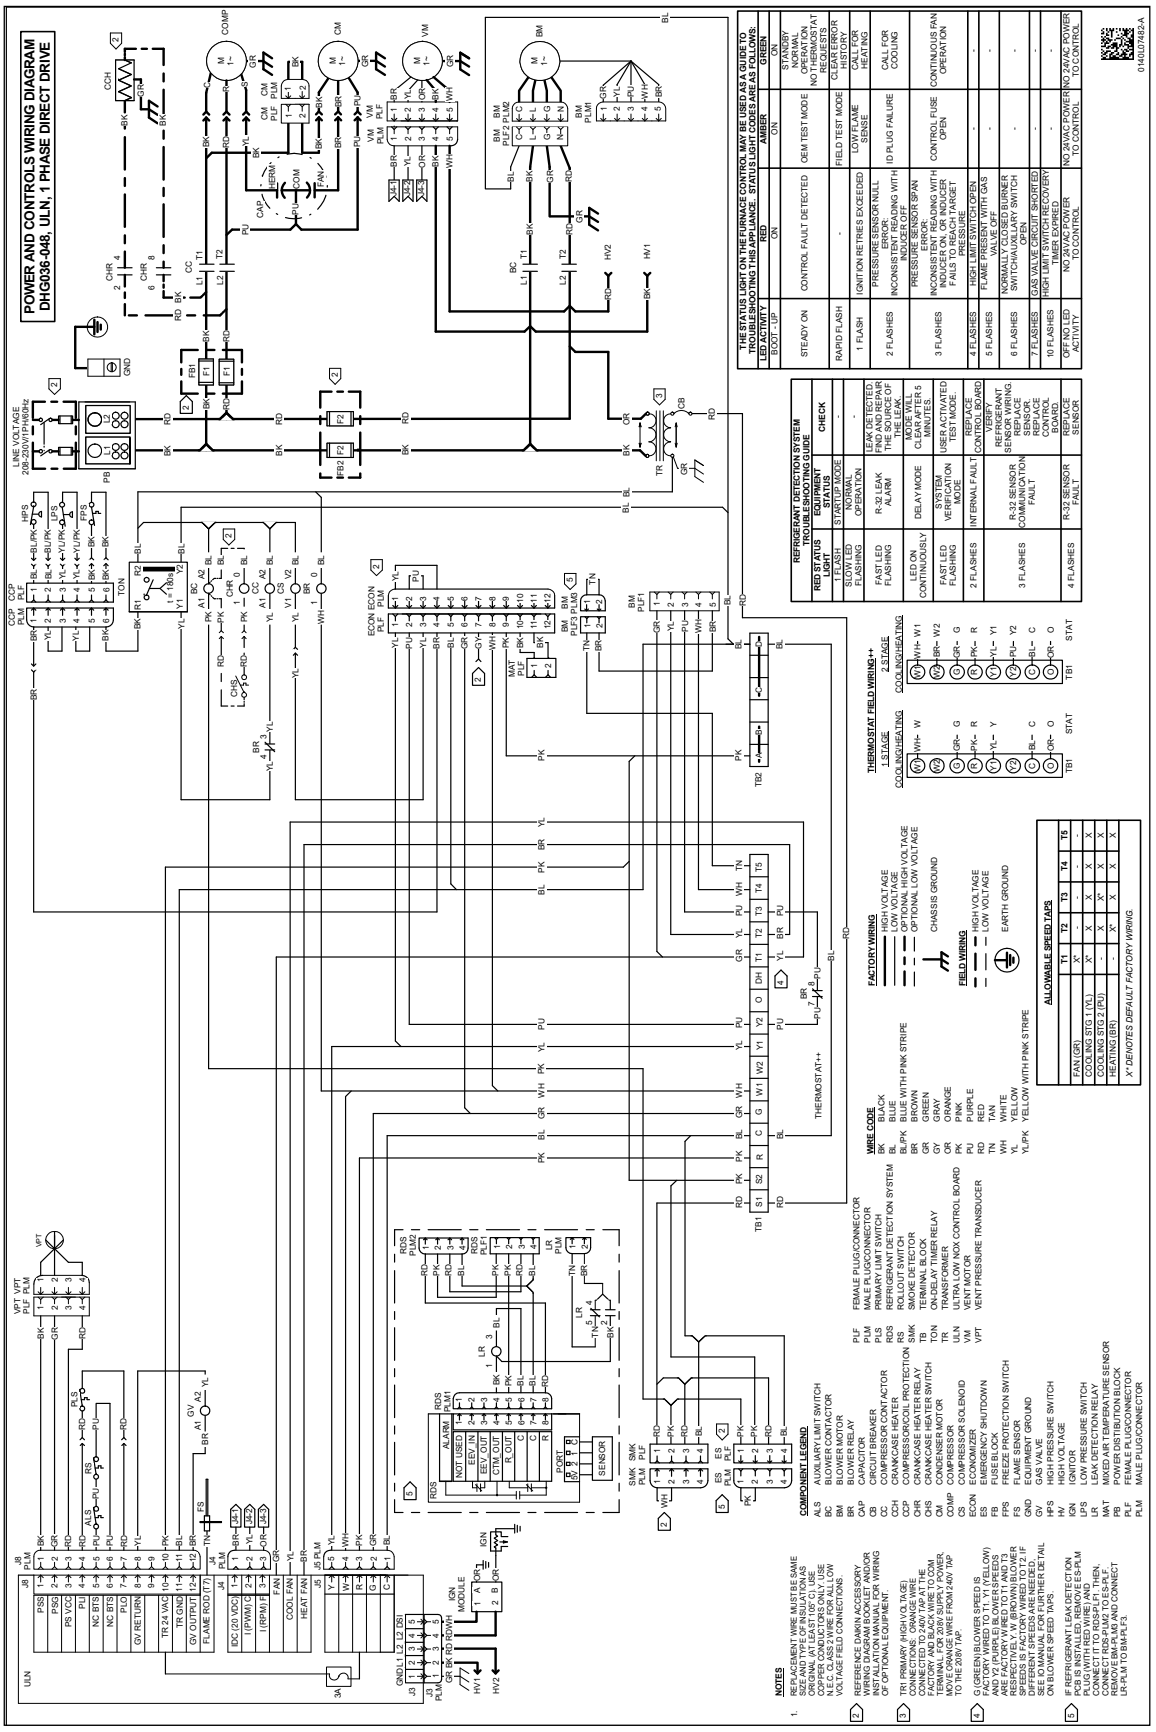

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

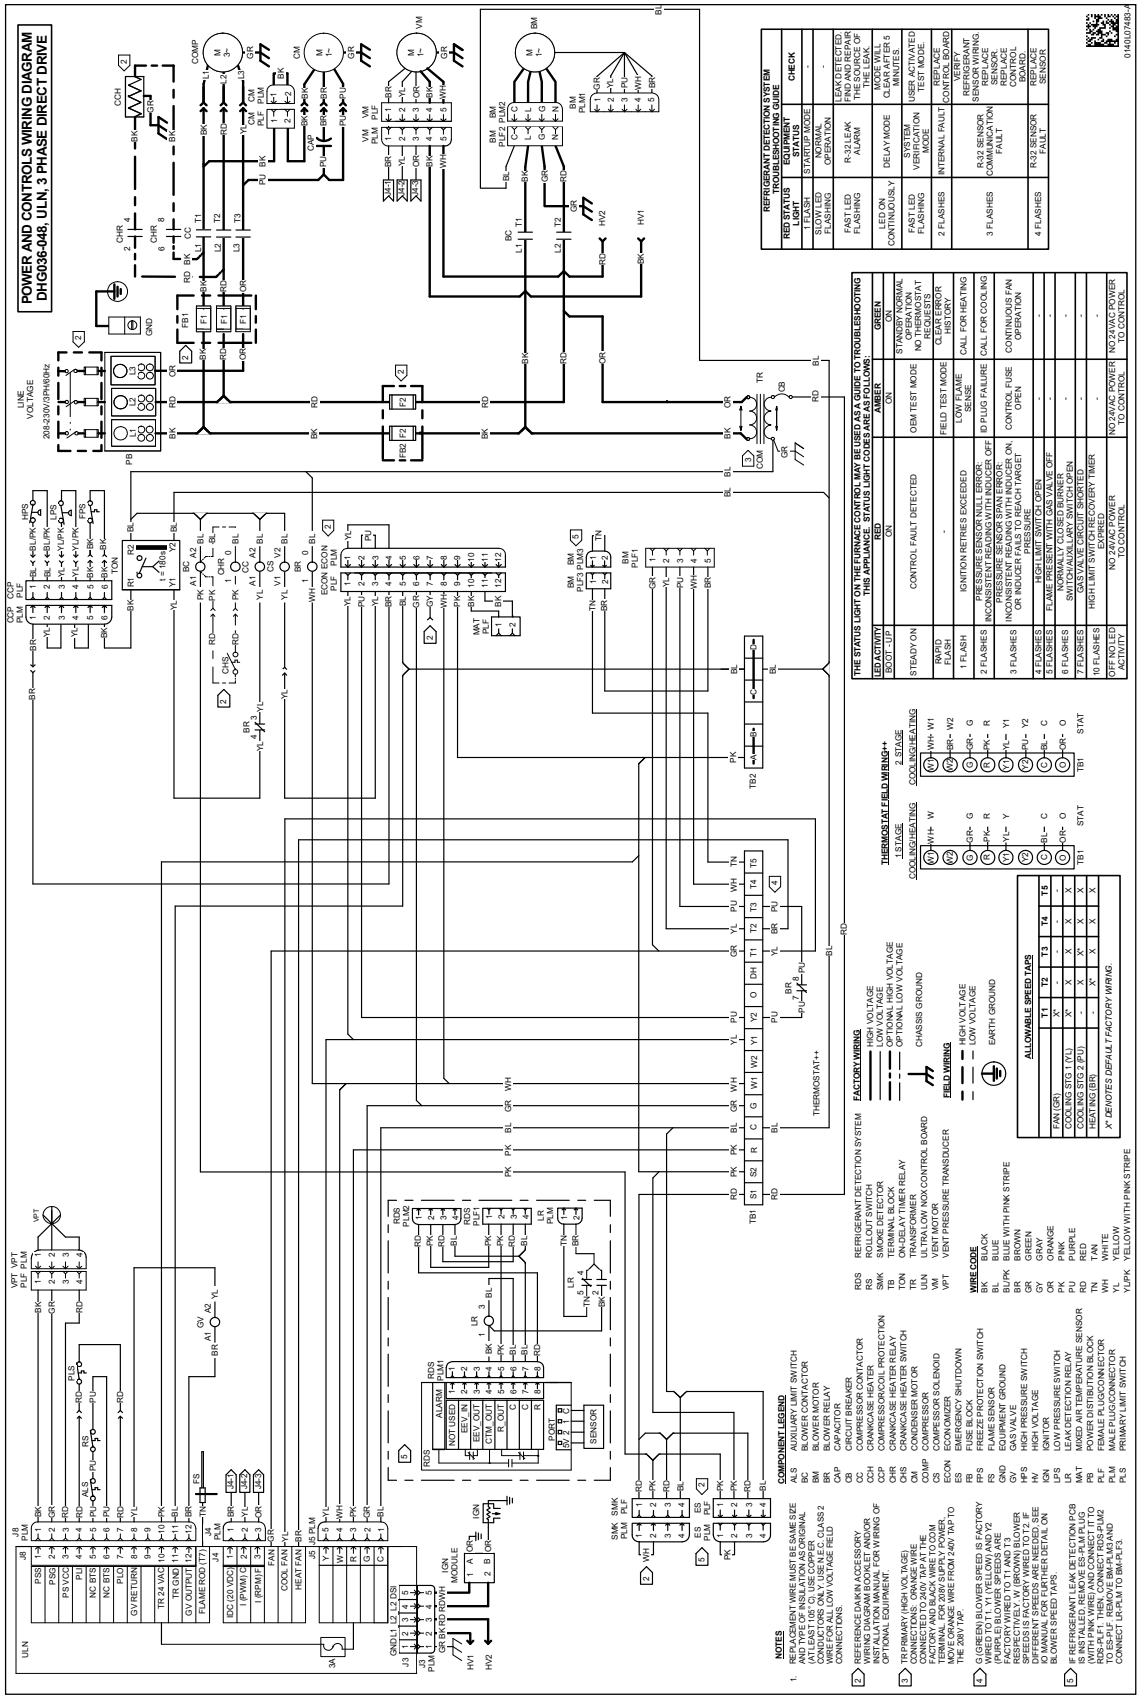

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

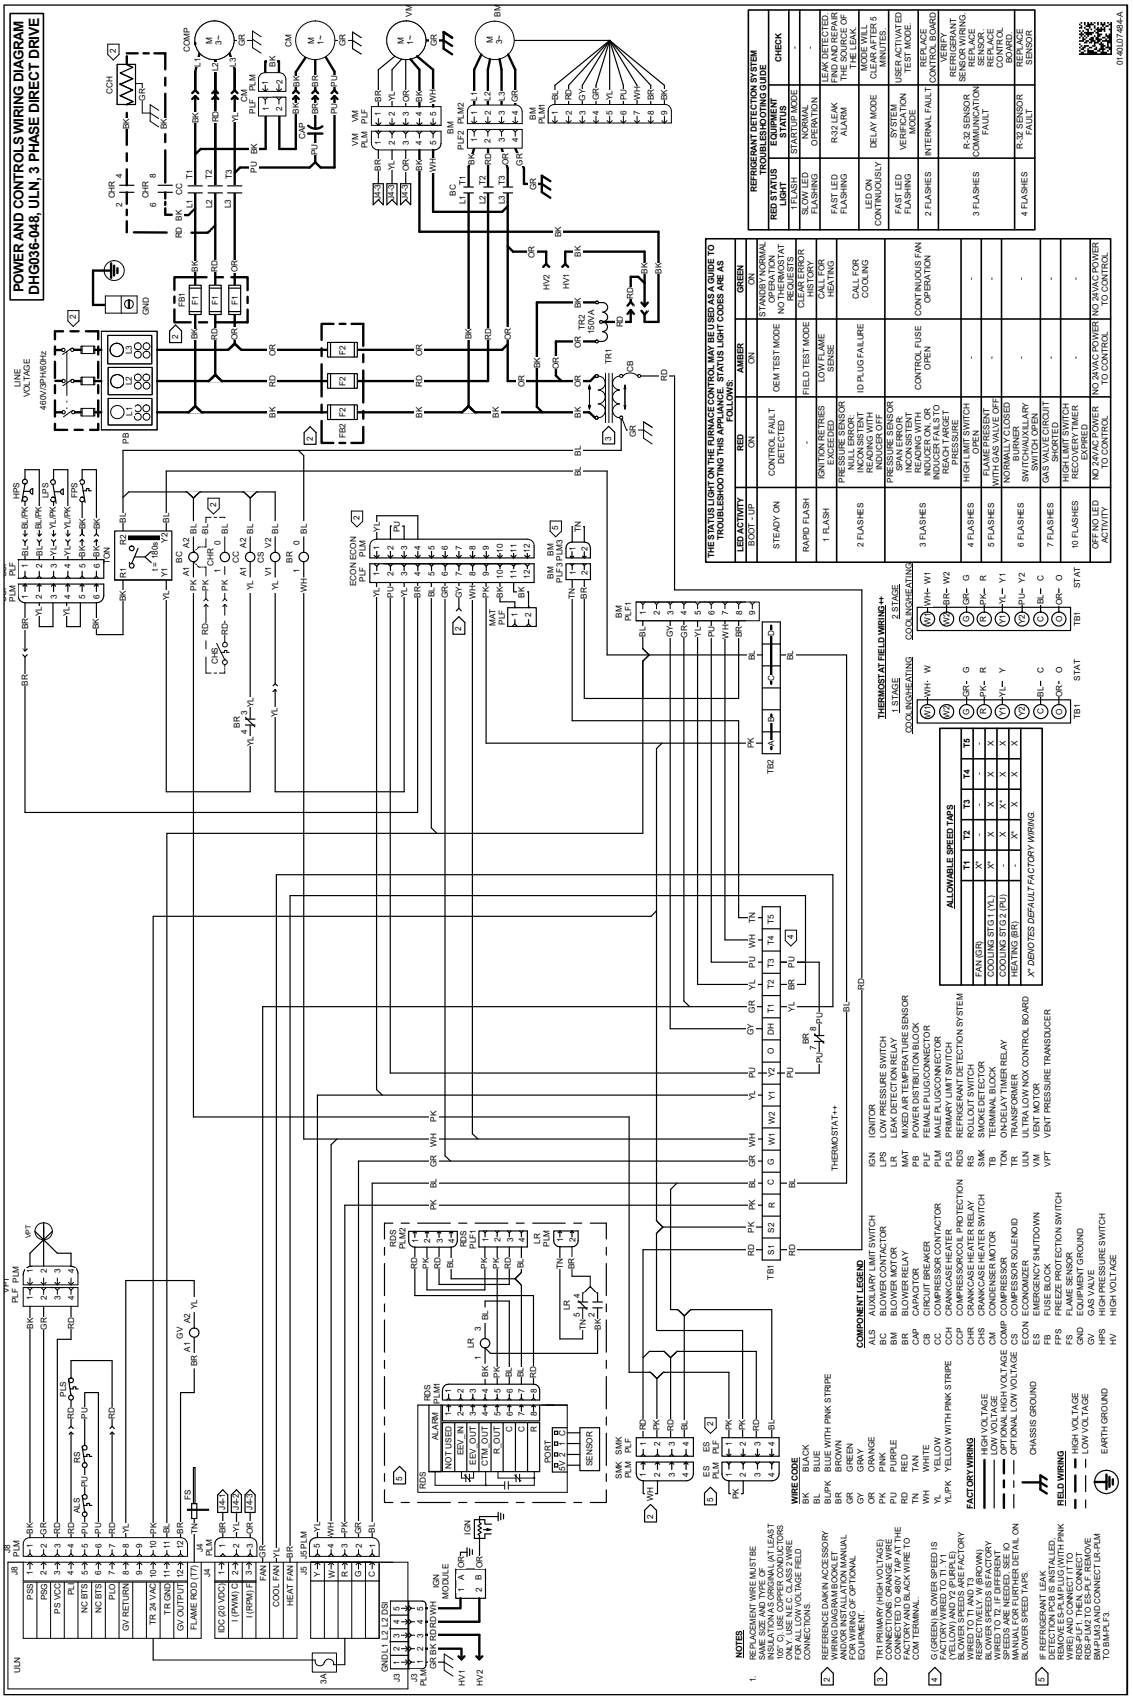


WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

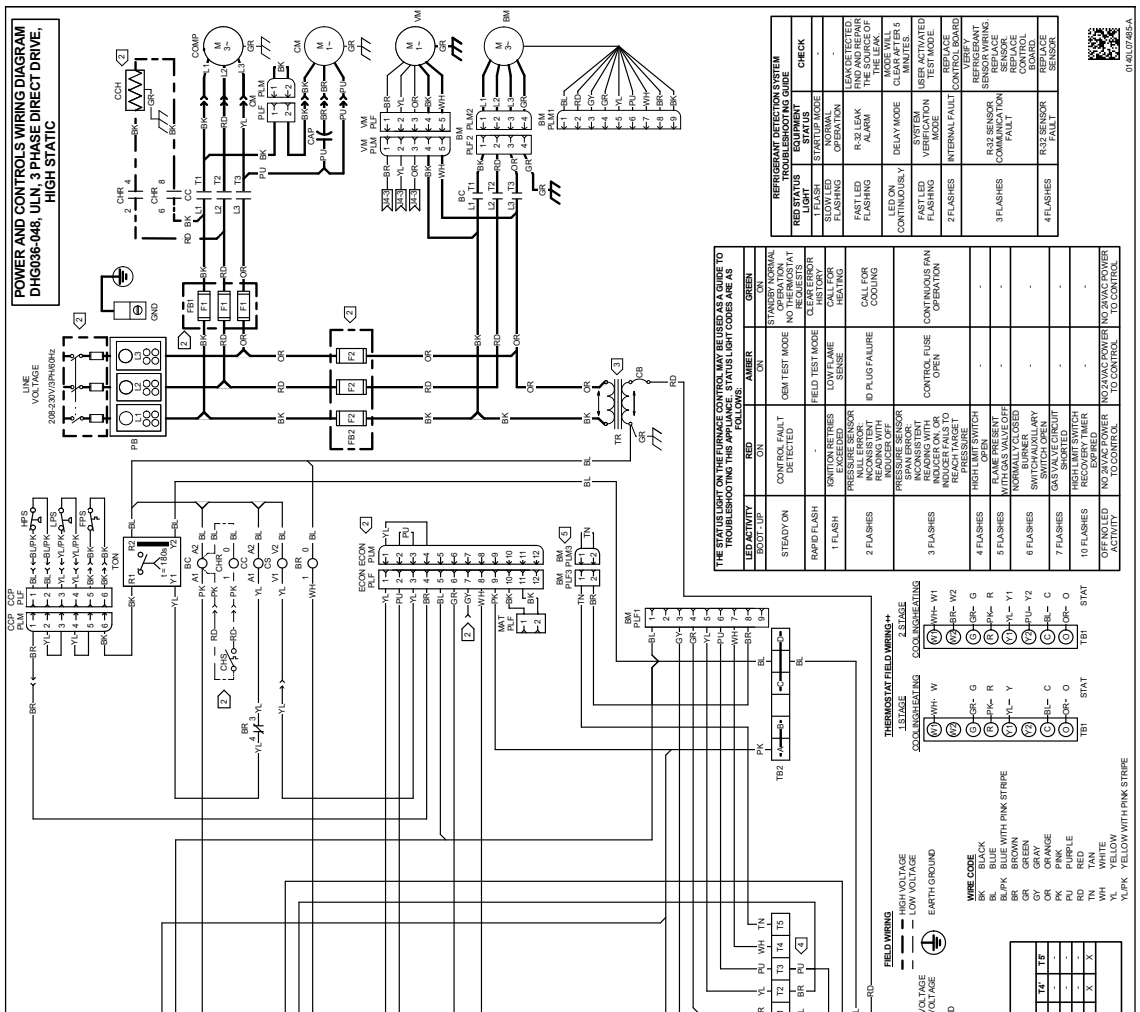





WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

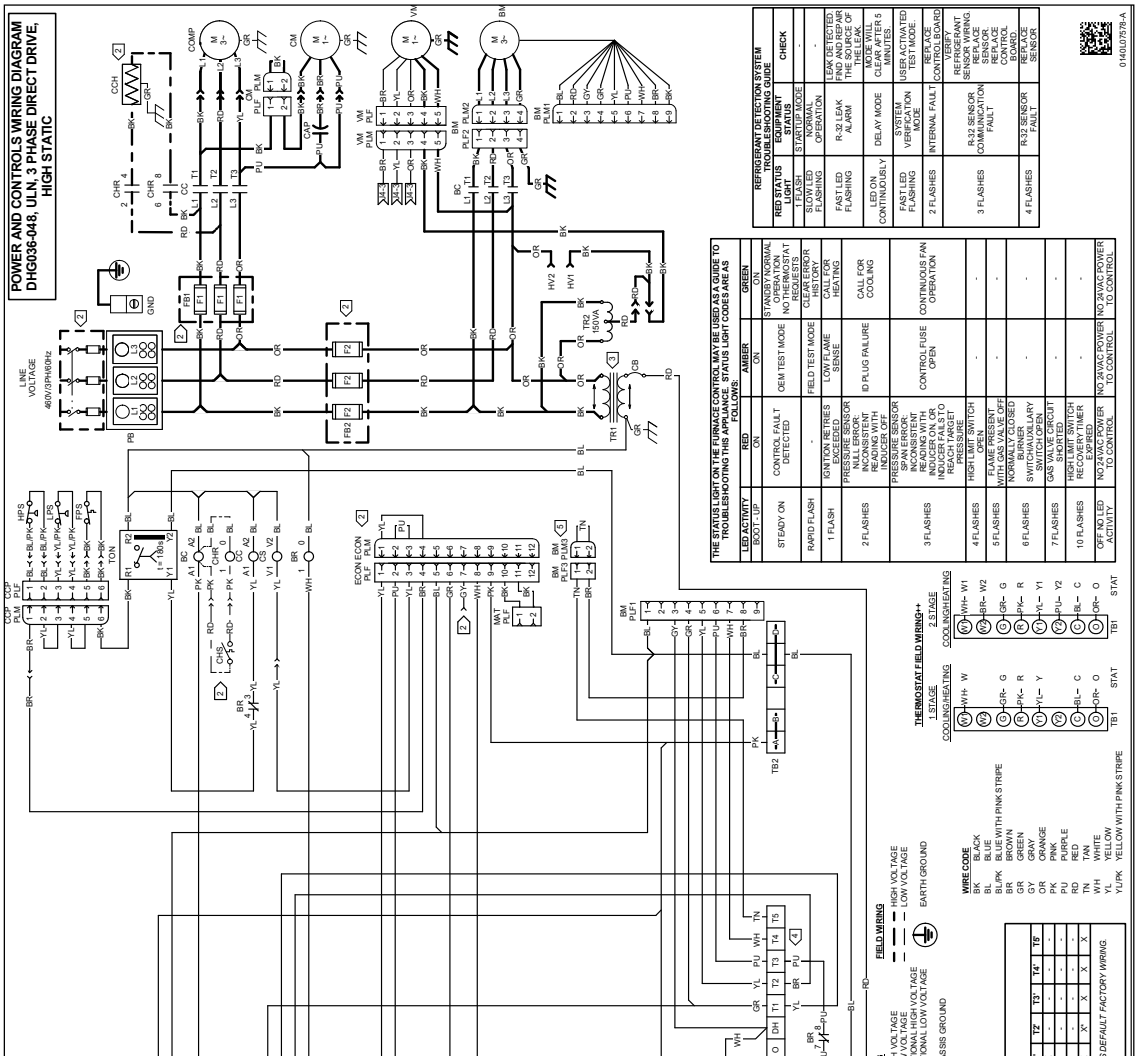

POWER AND CONTROLS WIRING DIAGRAM
DHG036-048, ULN, 3 PHASE DIRECT DRIVE, HIGH STATIC
LINE VOLTAGE 460V/3PH/60Hz
ULN
NOTES
COMPONENT LEGEND
FIELD WIRING
FACTORY WIRING
THERMOSTAT FIELD WIRING++
WIRE CODE
ALLOWABLE SPEED TAPS
THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:
REFRIGERANT DETECTION SYSTEM TROUBLESHOOTING GUIDE
WARNING
High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.
Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

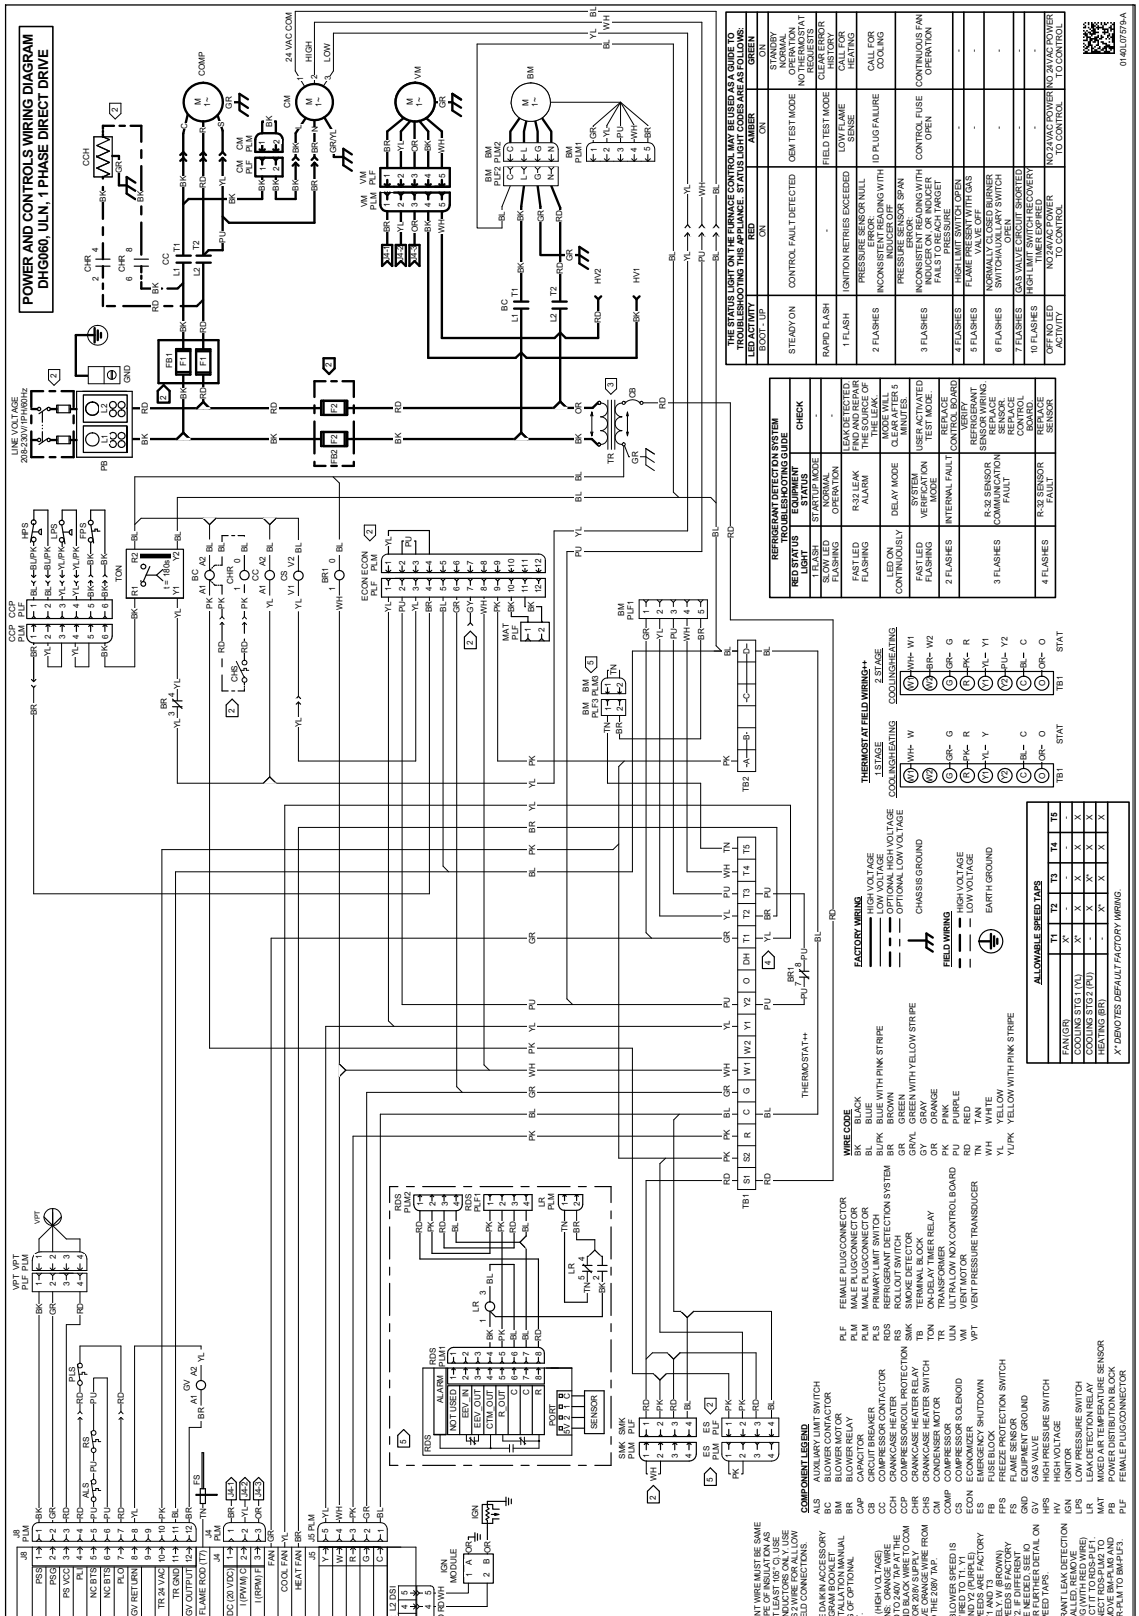


WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

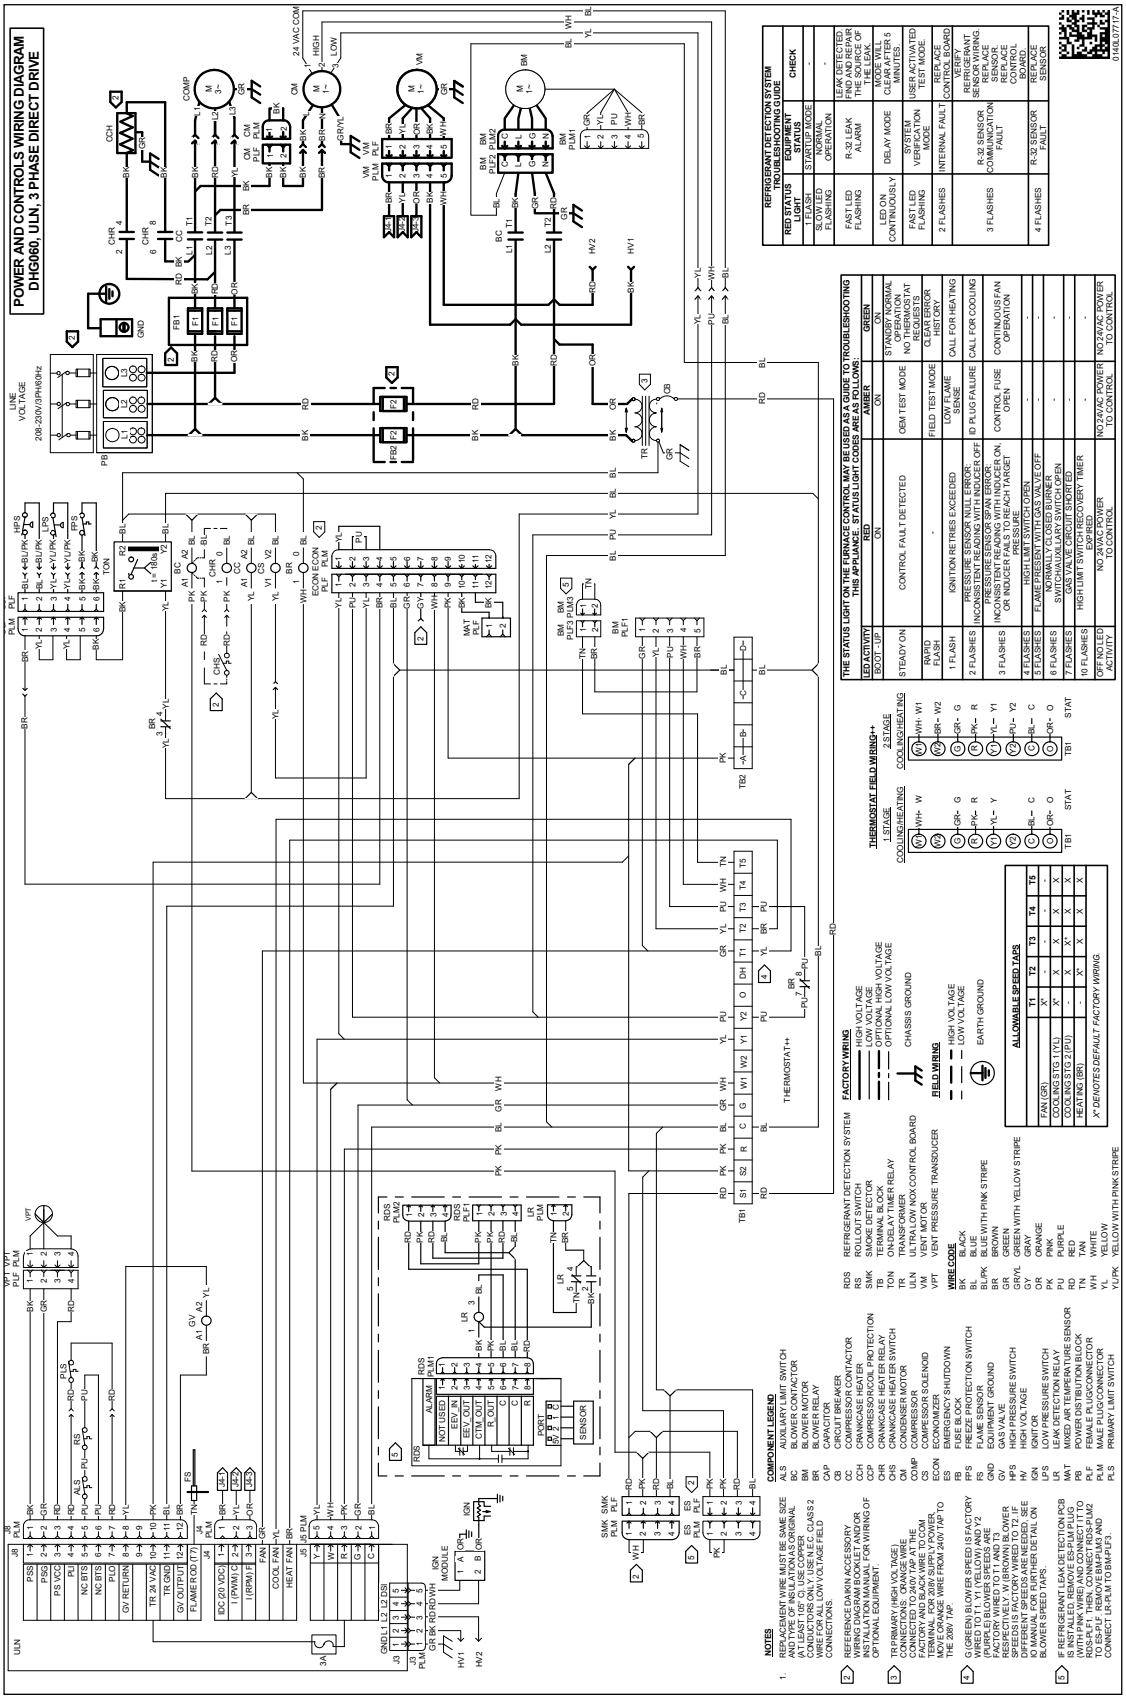

POWER AND CONTROLS WIRING DIAGRAM
DHG060, ULN, 3 PHASE DIRECT DRIVE
LINE VOLTAGE
208-230V/3PH/60Hz
NOTES
COMPONENT LEGEND
FACTORY WIRING
FIELD WIRING
WIRE CODE
THERMOSTAT++
1 STAGE COOLING/HEATING
2 STAGE COOLING/HEATING
ALLOWABLE SPEED TAPS
THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:
REFRIGERANT DETECTION SYSTEM TROUBLESHOOTING GUIDE
WARNING
High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.
Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

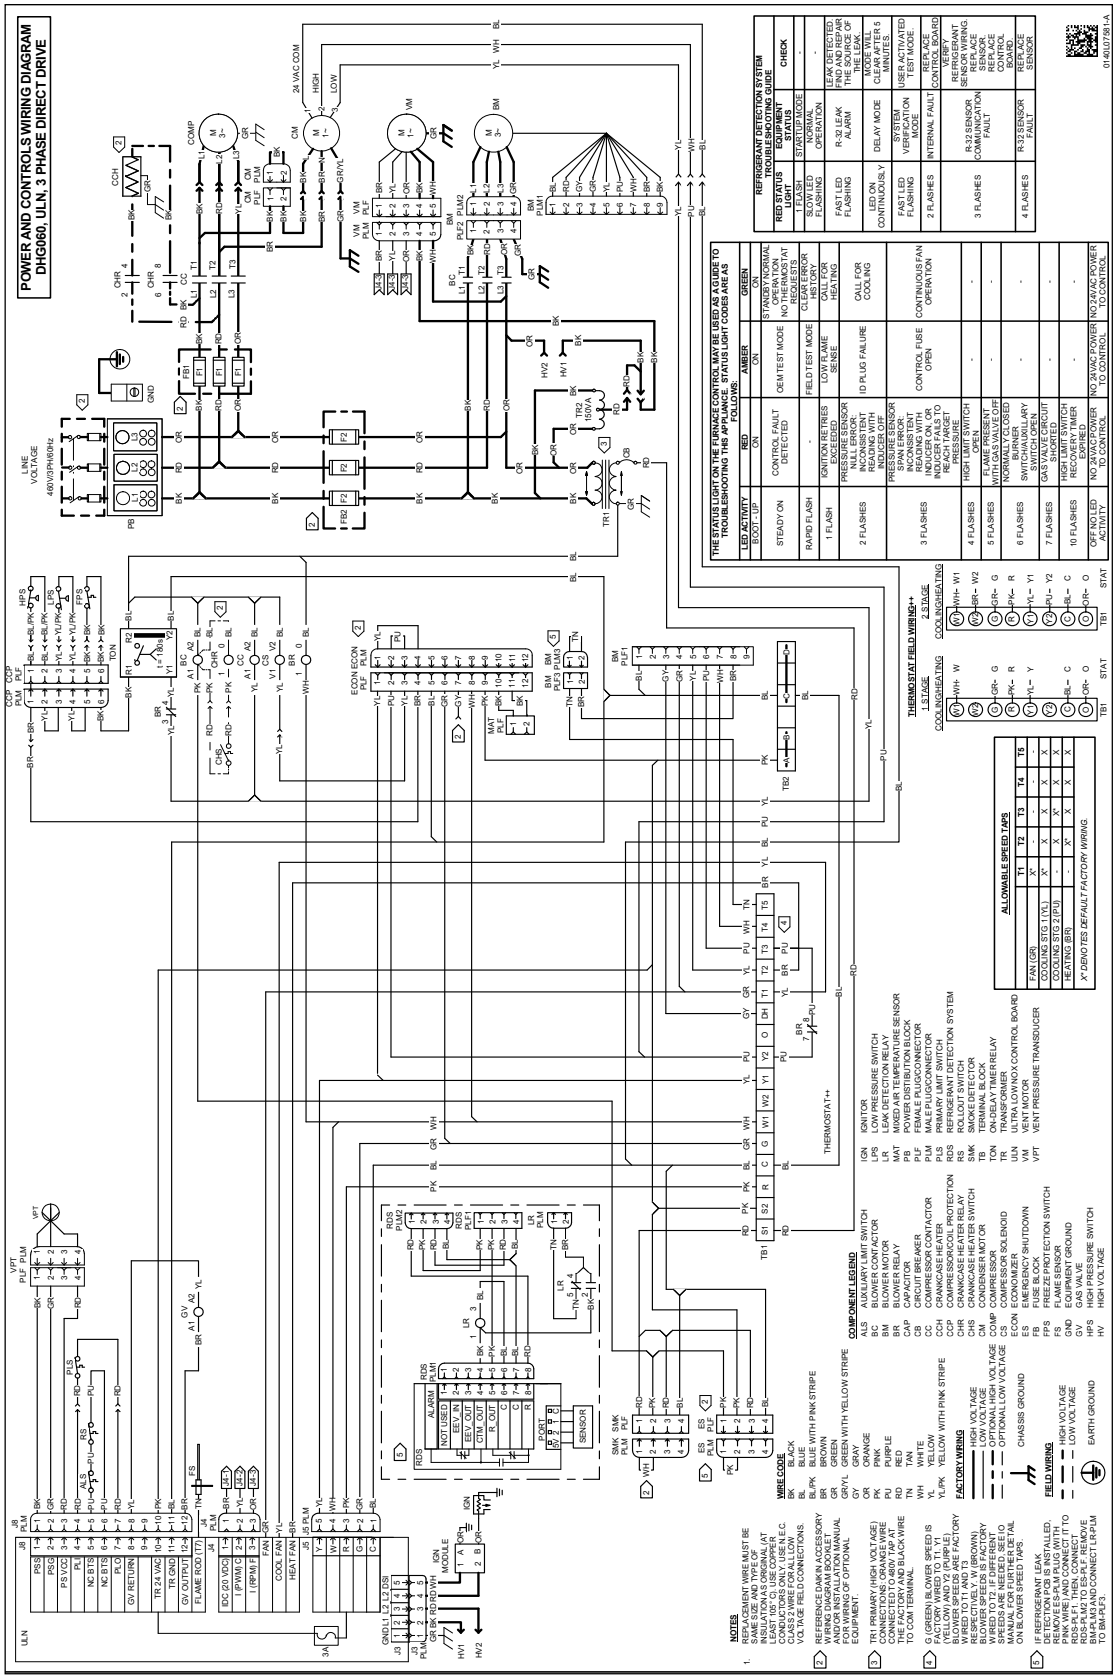

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

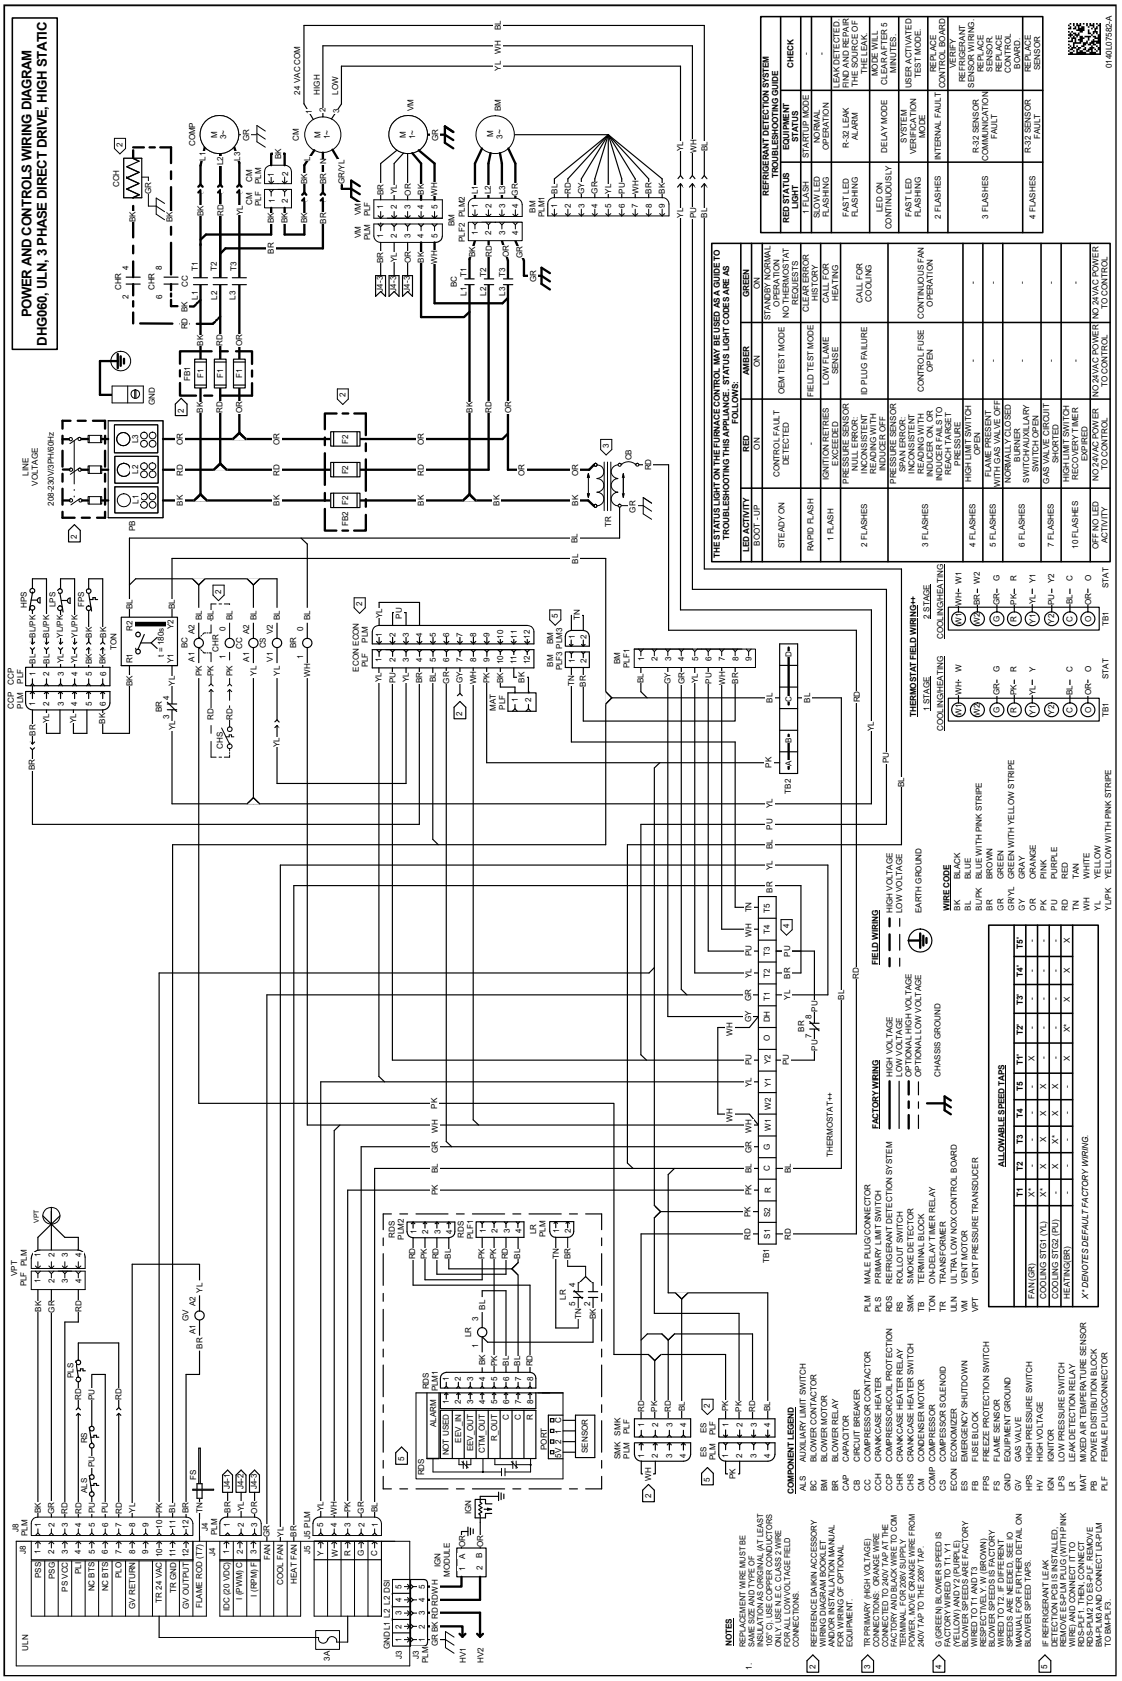



Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

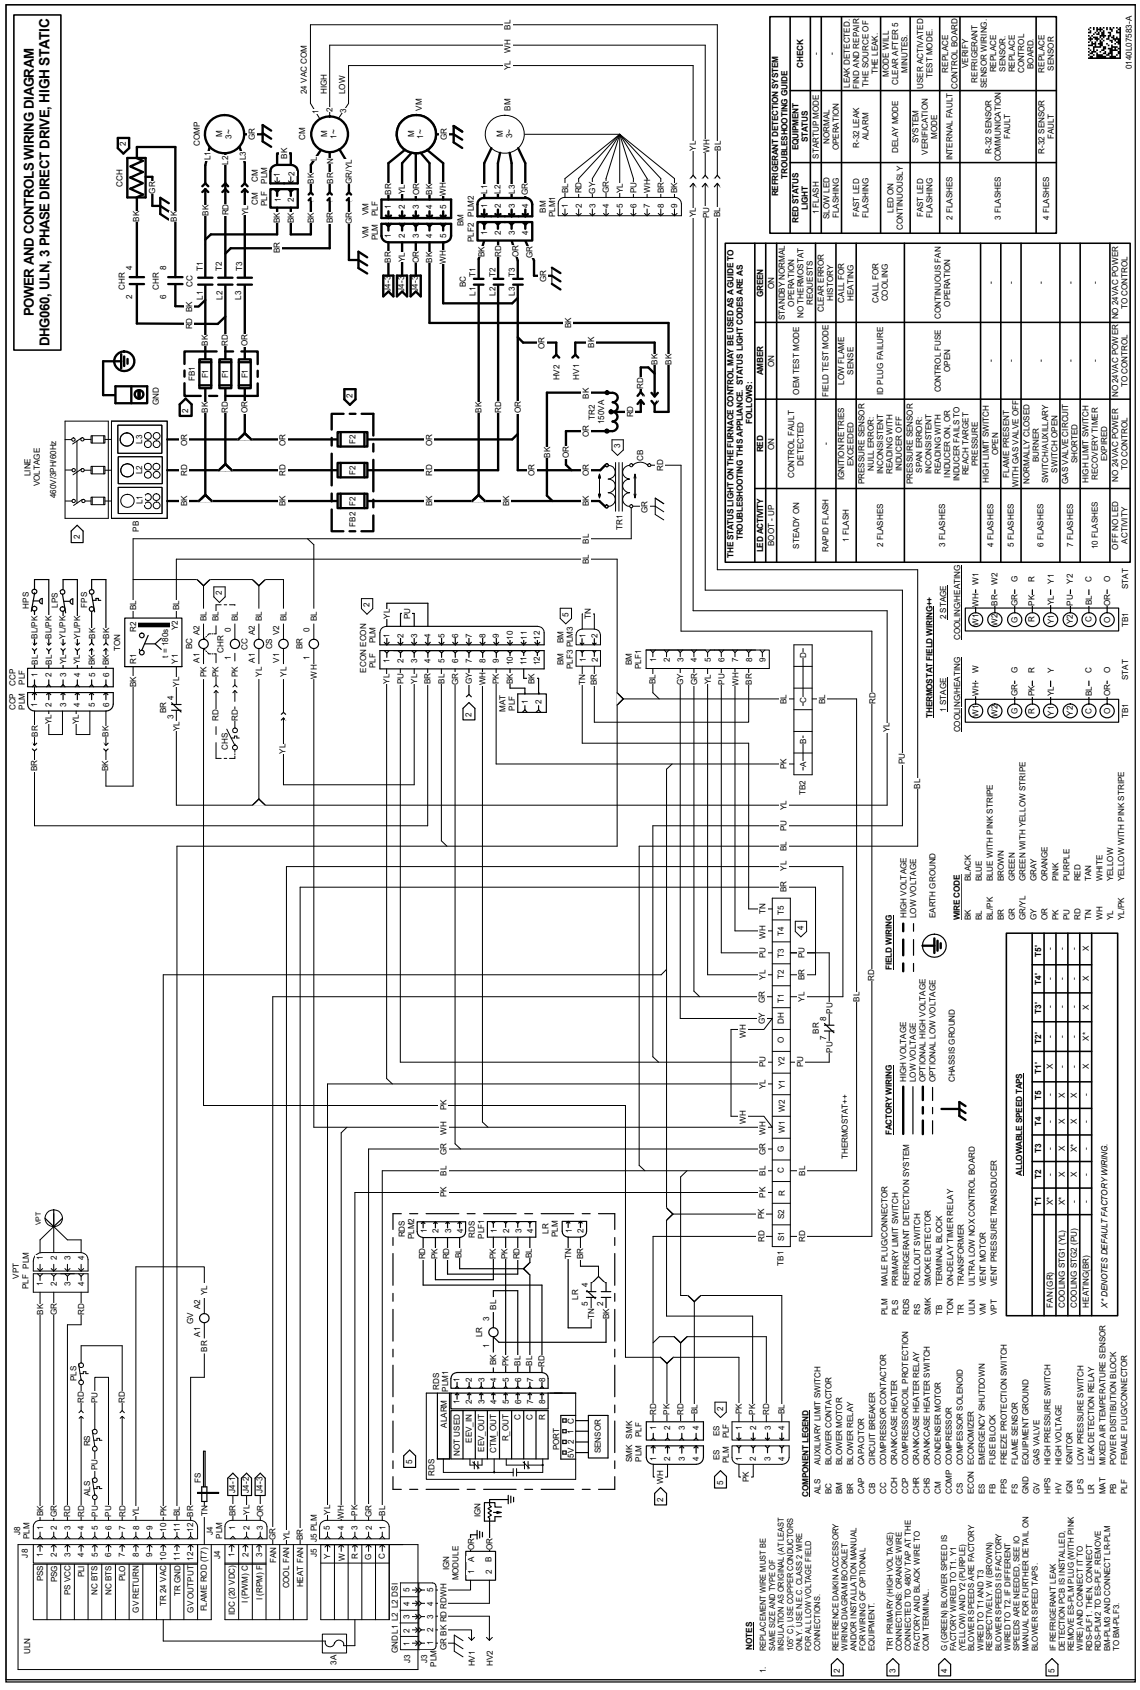
POWER AND CONTROLS WIRING DIAGRAM
DHG060, ULN, 3 PHASE DIRECT DRIVE, HIGH STATIC
LINE VOLTAGE 460V/3PH/60Hz
ULN
NOTES
COMPONENT LEGEND
FACTORY WIRING
FIELD WIRING
WIRE CODE
ALLOWABLE SPEED TAPS
THERMOSTAT FIELD WIRING**
THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:
REFRIGERANT DETECTION SYSTEM TROUBLESHOOTING GUIDE
0140U07583-A
WARNING
High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.
Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

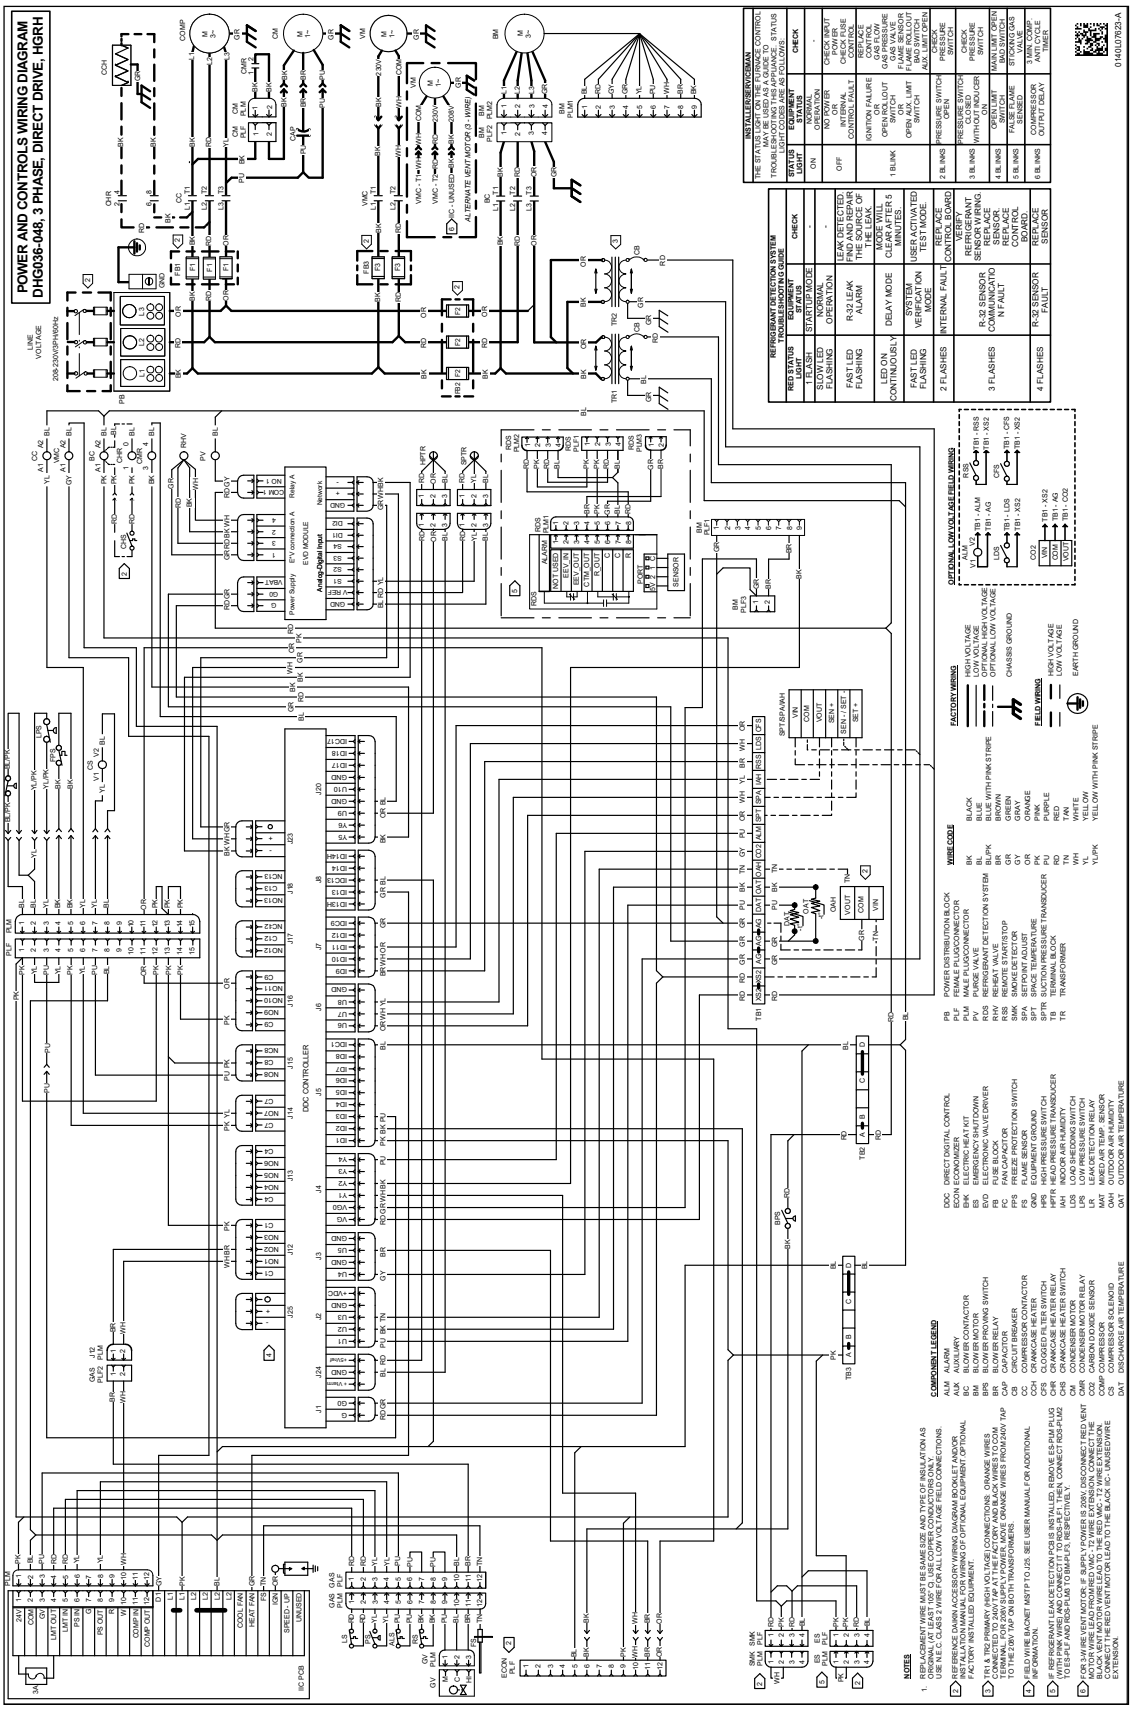

POWER AND CONTROLS WIRING DIAGRAM
DHG036-048; 3 PHASE, DIRECT DRIVE, HGRH
NOTES
COMPONENT LEGEND
WIRE CODE
FACTORY WIRING
FIELD WIRING
OPTIONAL LOW VOLTAGE FIELD WIRING
REFRIGERANT DETECTION SYSTEM
INSTALLER/SERVICEMAN
Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.
WARNING
High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

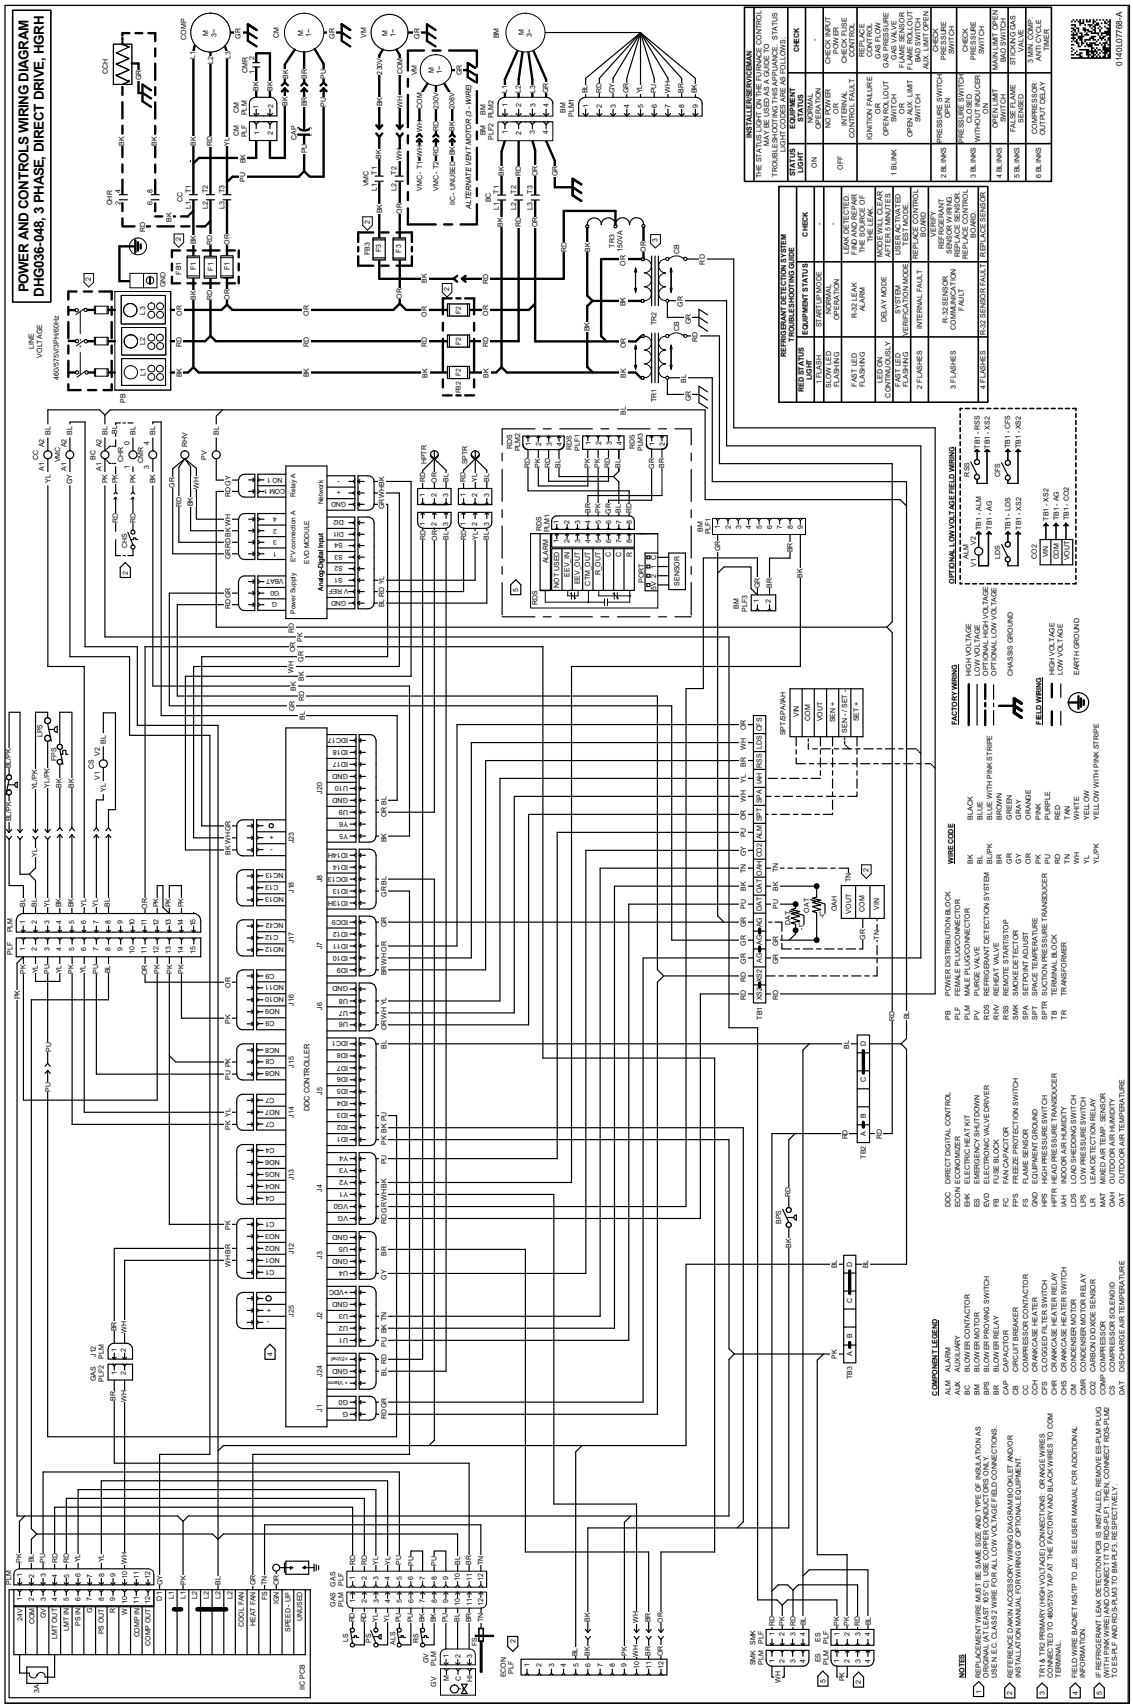

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

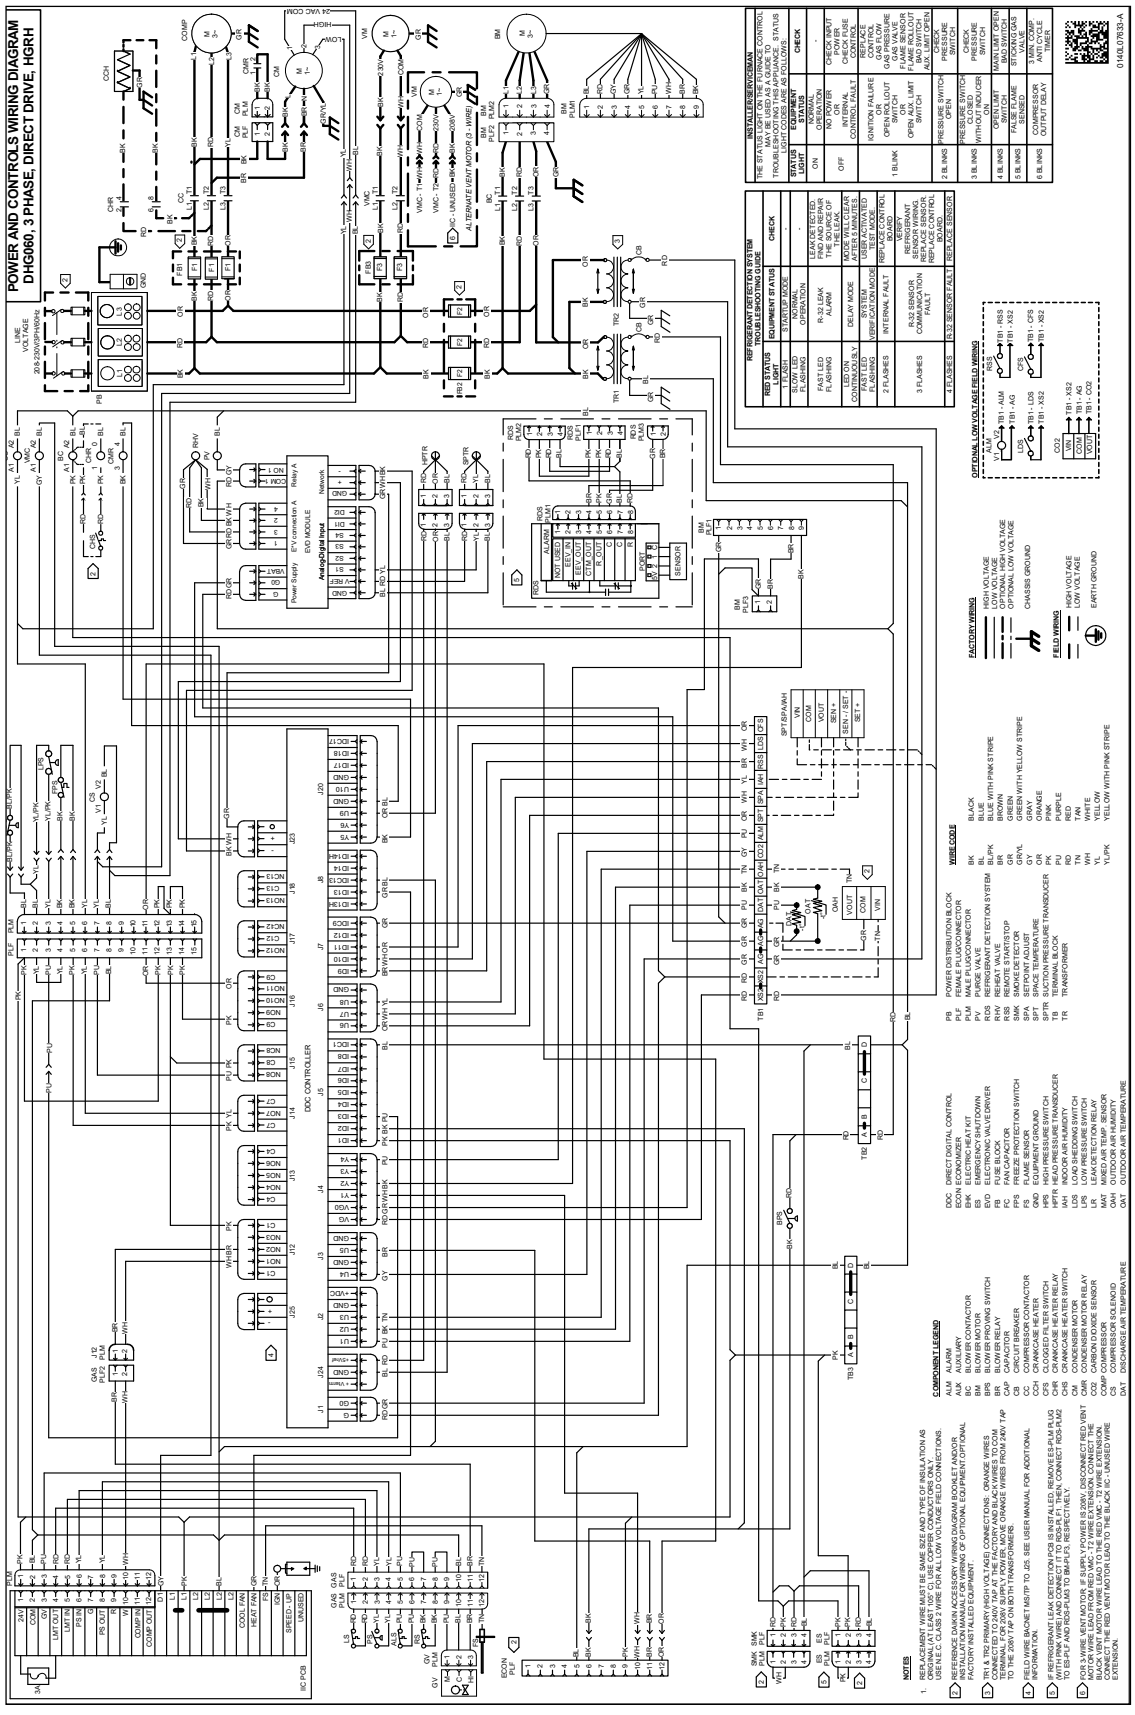


WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

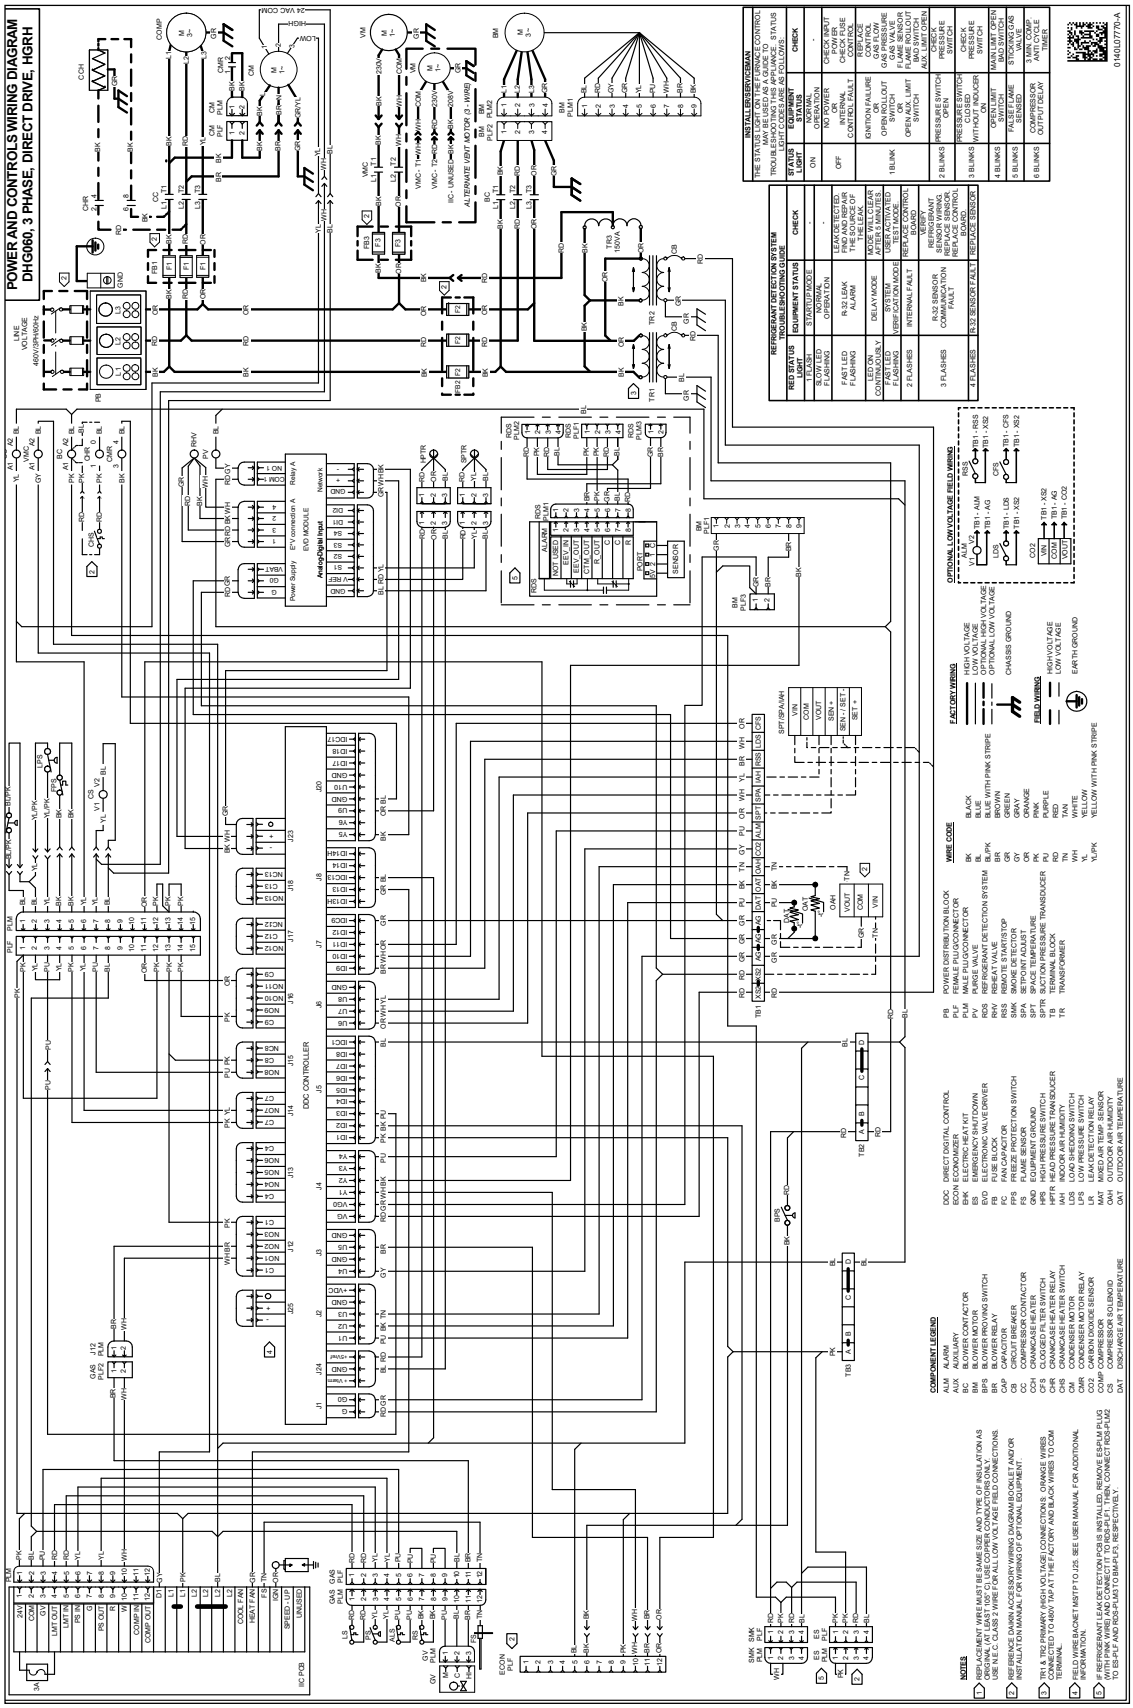

POWER AND CONTROLS WIRING DIAGRAM
DHG060, 3 PHASE, DIRECT DRIVE, HGRH
WARNING
High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.
Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

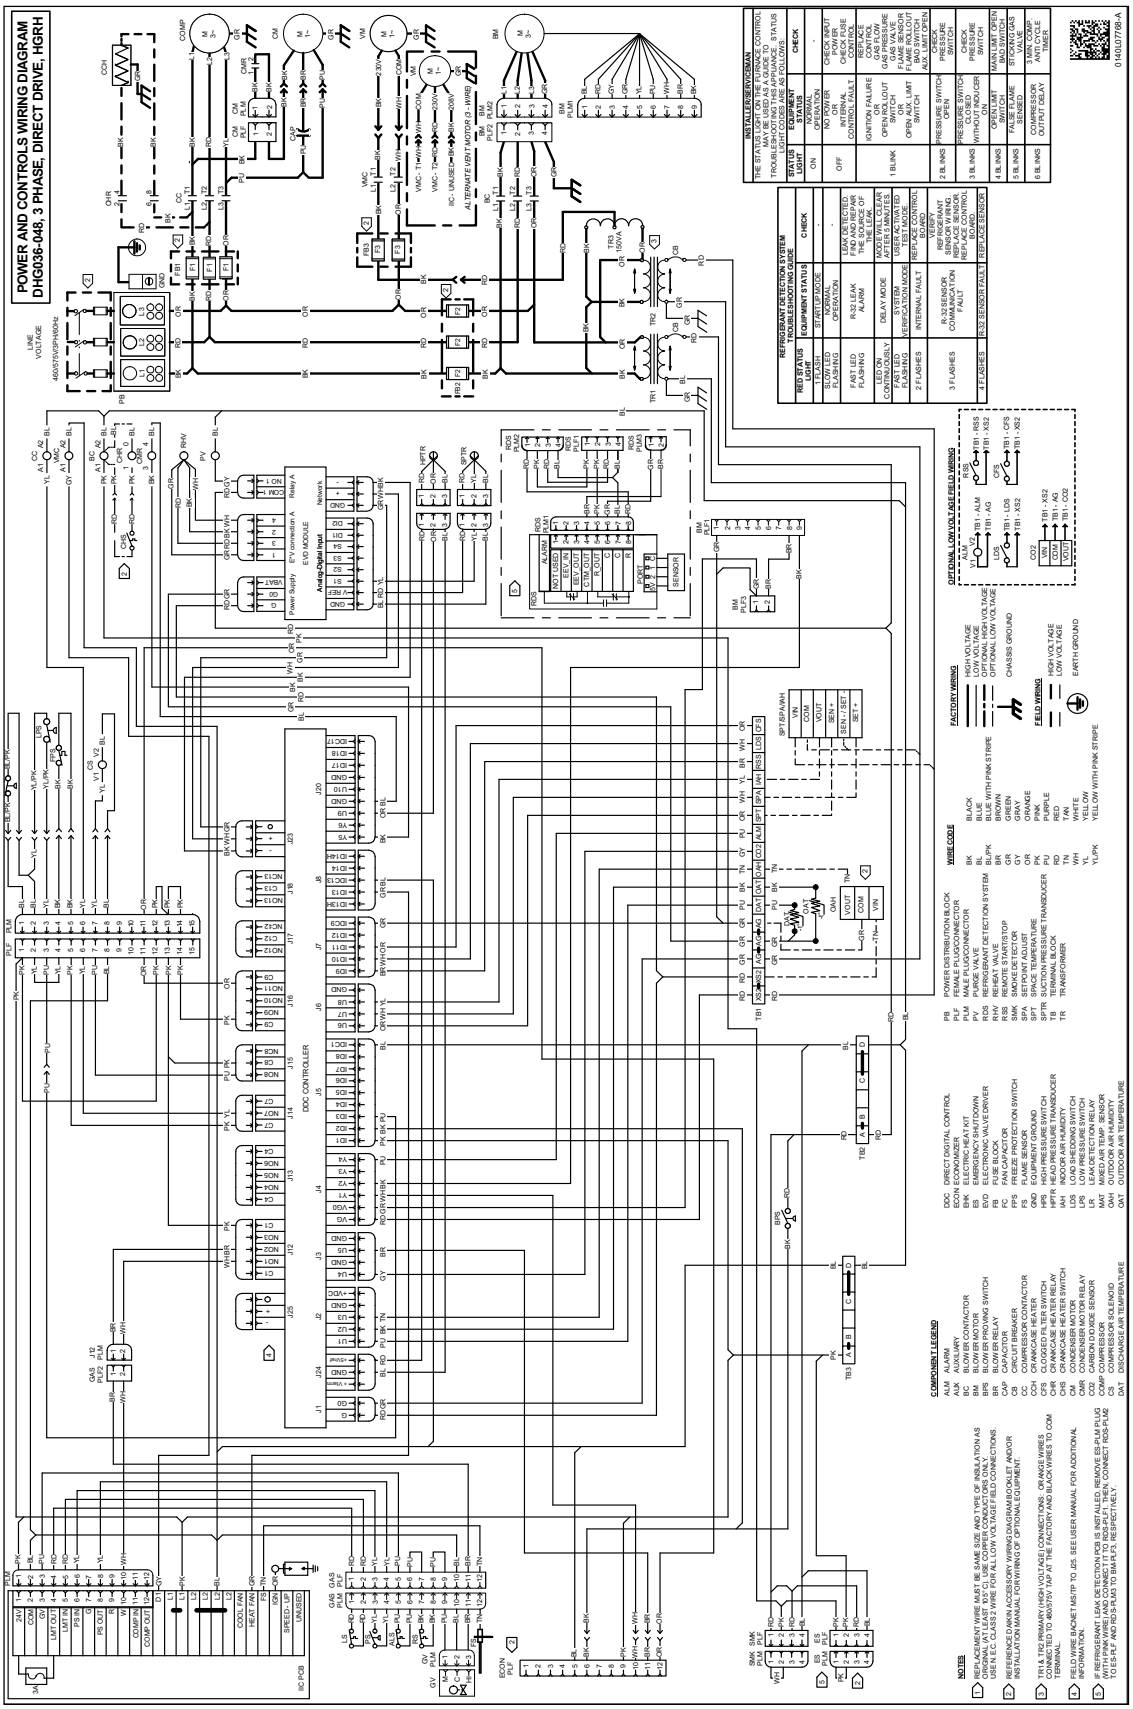

POWER AND CONTROLS WIRING DIAGRAM
DHG036-048; 3 PHASE, DIRECT DRIVE, HGRH
WARNING
Hot Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.
Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

Electrical Connections

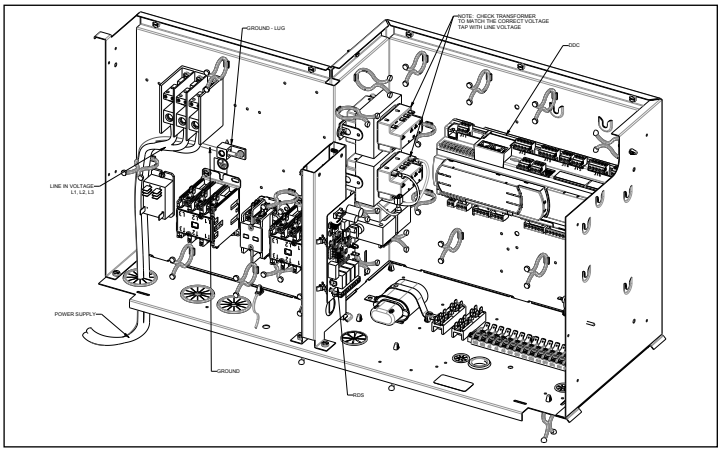

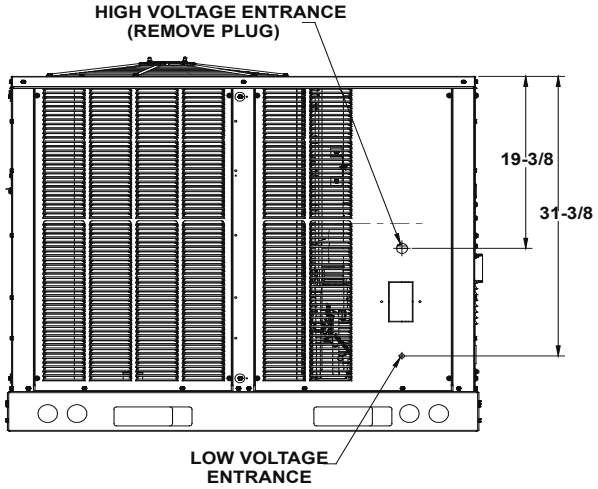

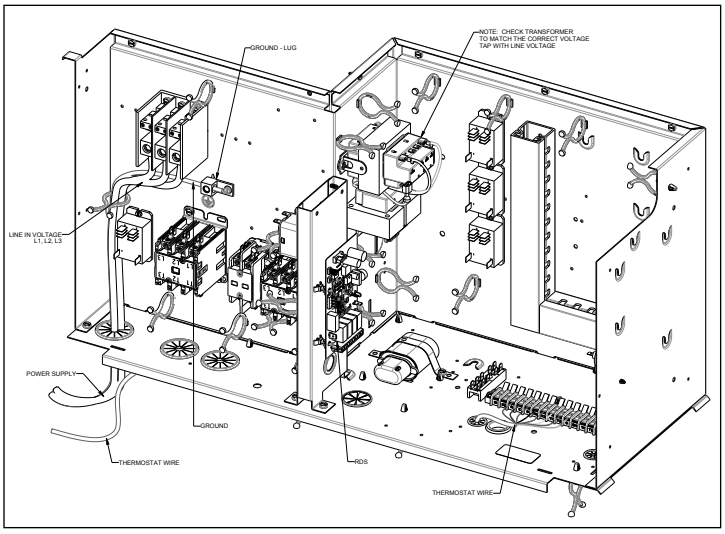


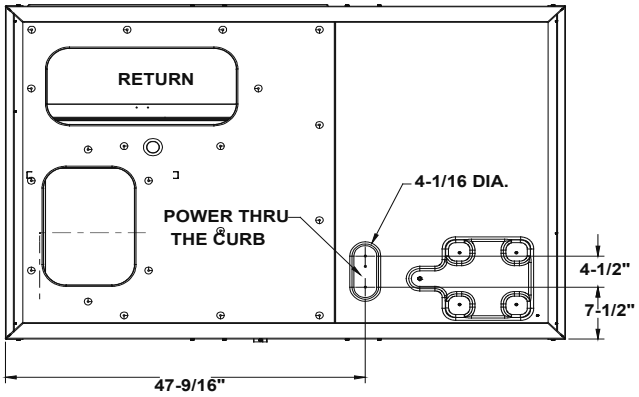

Unit Clearances

Service Clearance

Allow for recommended service clearances as shown in figure to the right. In situations that have multiple units, a 36” minimum clearance is required between the condenser coils. A clearance of 48” is recommended on all sides of the unit to allow service access and to ensure proper ventilation and condenser airflow. The top of the unit should be unobstructed. Provide a roof walkway along the sides of the unit for service and access to controls and components. Contact your Daikin sales representative for service requirements less than those recommended.

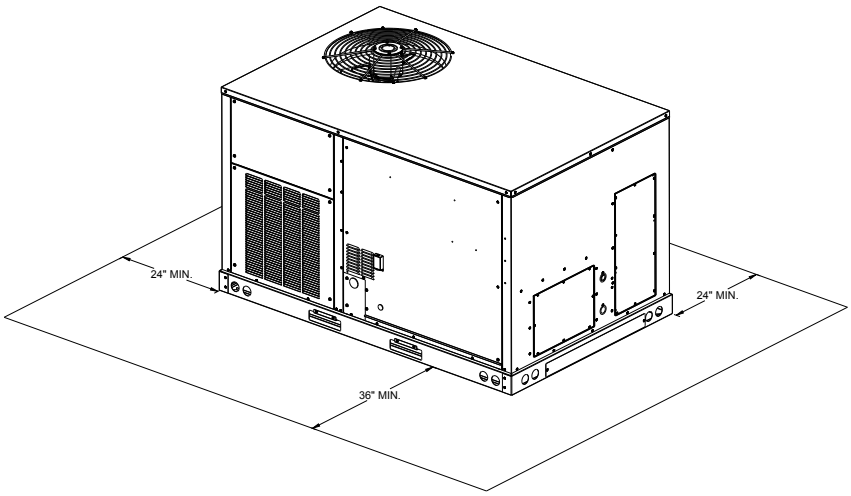

Unit Location


The structural engineer must verify that the roof has adequate support and ability to minimize deflection. Take extreme caution when using on a wooden roof structure. Unit condenser coils should be in a location that avoids any heated exhaust air.

Allow sufficient space around the unit for maintenance/service clearance. Consult your Daikin sales representative if available clearances do not meet minimum recommendations.

Where code considerations, such as the NEC, require extended clearances, these take precedence.

Provisions for forks have been included in the unit base frame. No other fork locations are approved.

- Unit must be lifted by the four lifting holes located at the base frame corners.
- Lifting cables should be attached to the unit with shackles.
- The distance between the crane hook and the top of the unit must not be less than 60".
- Two spreader bars must span over the unit to prevent damage to the cabinet by the lift cables. Spreader bars must be of sufficient length so that cables do not come in contact with the unit during transport. Remove wood struts mounted beneath unit base frame before setting unit on roof curb. These struts are intended to protect unit base frame from fork lift damage. To remove the struts, extract the sheet metal retainers and pull the struts through the base of the unit. Refer to rigging label on the unit.

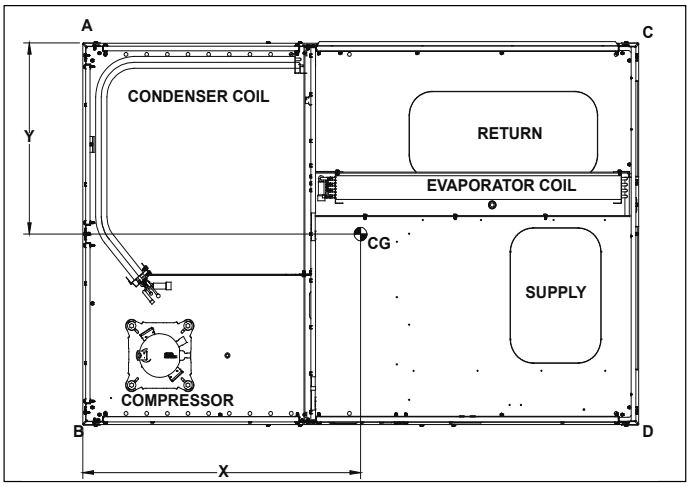

CORNER & CENTER-OF-GRAVITY LOCATIONS

Important: If using bottom discharge with roof curb, duct-work should be attached to the curb prior to installing the unit. Refer to the Roof Curb Installation Instructions for proper curb installation. Curbing must be installed in compliance with the National Roofing Contractors Association Manual. Lower unit carefully onto roof mounting curb. While rigging the unit, the center of gravity will cause the condenser end to be lower than the supply air end. Bring condenser end of unit into alignment with the curb. With condenser end of the unit resting on curb member and using curb as a fulcrum, lower opposite end of the unit until entire unit is seated on the curb. When a rectangular cantilever curb is used, take care to center the unit. Check for proper alignment and orientation of supply and return openings with duct.

Roof Curb Installation

The roof curb is field-assembled and must be installed level (within 1/16" per foot side to side). A sub-base must be constructed by the contractor in applications involving pitched roofs. Gaskets are furnished and must be installed between the unit and curb. For proper installation, follow NRCA guidelines. In applications requiring post and rail installation, an I-beam securely mounted on multiple posts should support the unit on each side. In addition, the insulation on the underside of the unit should be protected from the elements. Applications in geographic areas subjected to seismic or hurricane conditions must meet code requirements for fastening the unit to the curb and the curb to the building structure. For further and more detailed information please refer to our Daikin Light Commercial Packaged unit IOD.

Weights

Model	Shipping Weight (lbs)	Operating Weight (lbs)	Corner Weights (lbs)				Length	Width
			A	B	C	D	X (in)	Y (in)
DHG036	630	572	104	141	186	141	36½	27 7/10
DHG048	705	647	118	231	180	118	36⅛	27 9/10
DHG060	713	655	148	189	135	183	34⅝	27½
DHG072	763	705	122	246	180	157	35⅛	27 1/7

The numbers may slightly vary depending on installed options

For details on accessories refer to document **PM-LC-ACCESSORIES**

Our continuing commitment to quality products may mean a change in specifications without notice.
©2026 DAIKIN COMFORT TECHNOLOGIES MANUFACTURING, INC. • Houston, Texas

Notes

Notes

Notes

Our continuing commitment to quality products may mean a change in specifications without notice.
©2026 DAIKIN COMFORT TECHNOLOGIES MANUFACTURING, INC. • Houston, Texas