



Submittal Data Sheet

R-32 --- 1-Ton Wall Mounted Daikin OTERRA Heat Pump System
FTXF12BVJU9-RXF12BVJU9

FEATURES

- Built in WI-FI
- Daikin Swing Compressor
- Indoor Quiet Operation
- Included Handheld Remote
- Titanium Apatite Air-Purifying Filter
- Anti-corrosion Treatment of Outdoor Heat Exchanger

INDOOR UNIT



BENEFITS

- R-32 Easy, Proven, Efficient, Available
- Precharged Line set - 49 ft
- Cooling Operation Range - 50-118F for 9K/12K 50-122F for 18/24K
- 12 Year Parts and Compressor Registered Residential Warranty
- 5 year Parts and Compressor Commercial Warranty
- Facilities cooling to -4F- Please refer to Installation Manual

OUTDOOR UNIT





Submittal Data Sheet

R-32 --- 1-Ton Wall Mounted Daikin OTERRA Heat Pump System
FTXF12BVJU9-RXF12BVJU9

SYSTEM PERFORMANCE

Indoor Unit Model No.	FTXF12BVJU9	Indoor Unit Name:	R-32 --- 1- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
Outdoor Unit Model No.	RXF12BVJU9	Outdoor Unit Name:	R-32-- Daikin OTERRA 1 Ton ODU Heatpump
Rated Cooling Capacity (Btu/hr):	12,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	9,880	Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	14,600 / 4,400	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	1.480		
SEER2 (Non-Ducted/Ducted):	21.00 /	HSPF2 (Non-Ducted/Ducted):	10.2 /
EER2 (Non-Ducted/Ducted):	12.50 /		
Rated Heating Capacity (Btu/hr):	13,500	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 118
Holding Refrigerant Charge (lbs):	1.74	Heating Operation Range (°F WB):	5 - 65
Additional Charge (oz/ft):	0.22	Max. Pipe Length (Vertical) (ft):	49
Pre-charge Piping (Length) (ft):	49	Cooling Range w/Baffle (°F DB):	-4 - 118
Max. Pipe Length (Total) (ft):	66		
Max Height Separation (Ind to Ind ft):	0		



Submittal Data Sheet


R-32 --- 1-Ton Wall Mounted Daikin OTERRA Heat Pump System
FTXF12BVJU9-RXF12BVJU9

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	399/282/219/117
Power Supply Connections:	L1, L2, L3 Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	3/8
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	11-1/4 x 30-5/8 x 8-3/4	Condensate Connection (inch):	5/8
Net Weight (lb):	19	Sound Pressure (H/M/L/SL) (dBA):	46/37/31/19
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

Model : FTKF09/12A, FTXF09/12A

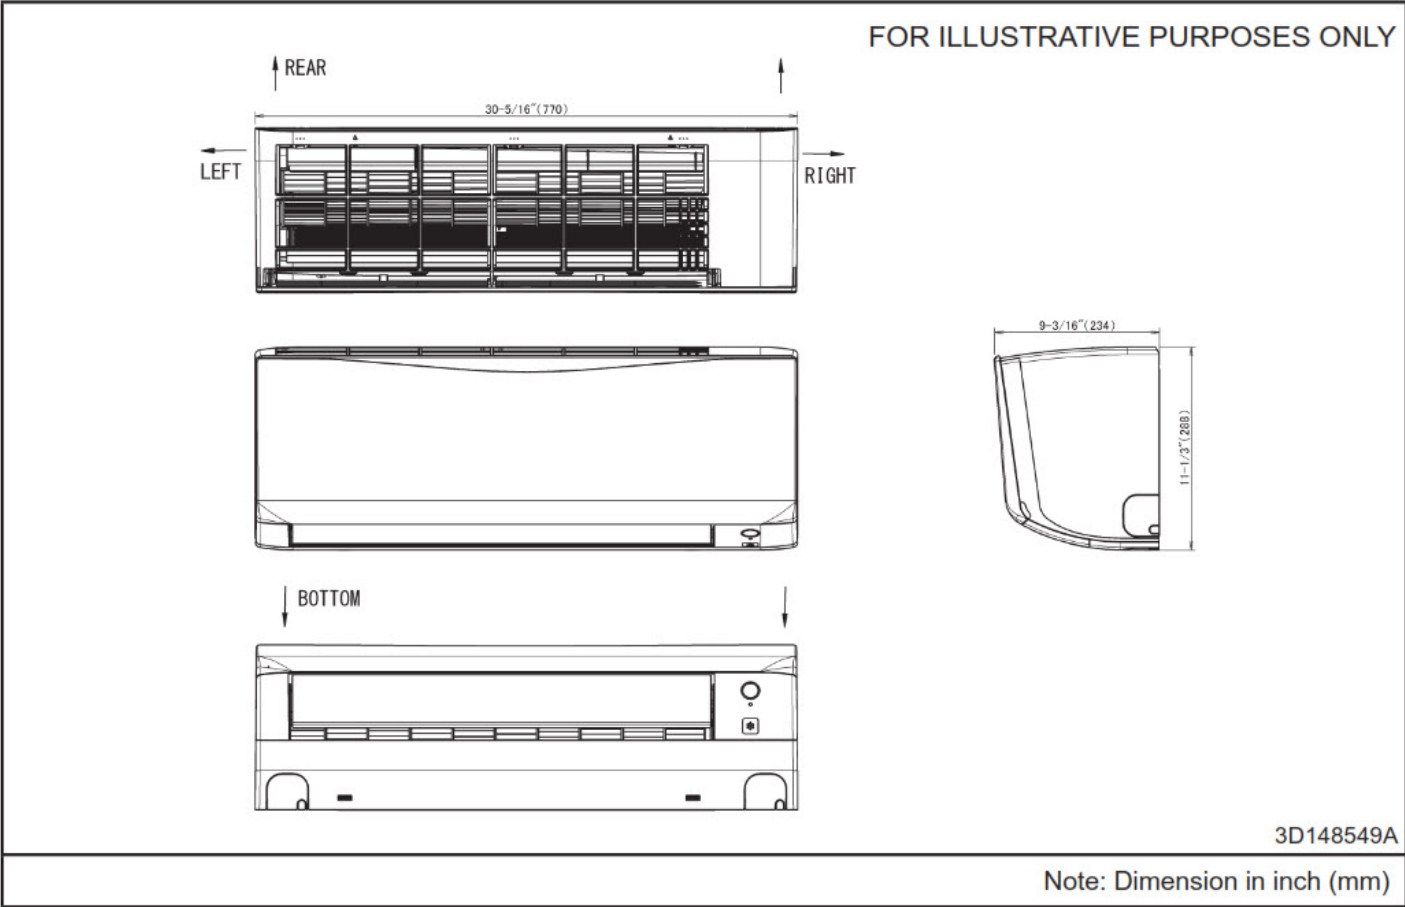



Submittal Data Sheet

R-32 --- 1-Ton Wall Mounted Daikin OTERRA Heat Pump System

FTXF12BVJU9-RXF12BVJU9

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)	No
AZAI6WSPDKC	DKN Plus Interface	No
BRC073A6	Wired Remote Controller (Requires Additional Wire Harness)	No
BRC944B2	Wired Remote Controller	No
BRCW901A03	BRC944B2 CONTROL CABLE, 10FT	No
BRCW901A08	Wired Remote Controller Cord - 8m/26ft	No
DCS301C71	Unified On/Off Controller	No
DCS302C71	Centralized Controller	No
DST301BA61	Schedule Timer	No
KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame	Yes
KKF936A4	LP CONVERSION KIT	No
KRP067A41E	Adaptor for wired remote controller	No
KRP928BB2S	RA Interface Adaptor for DIII-Net -	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
KEH068A41	Drain Pan Heater	No
KKG067A41	Back protection wire net (09 & 12)	No
KKP937A4	Drain Plug for OD Unit	Yes