



Air Conditioning & Heating

INDOOR COILS

CAPEA, CHPEA, CAPFA, CAPTA AND CHPTA PAINTED UPFLOW/DOWNFLOW AND HORIZONTAL "A"



CAPTA – Cased with Internal TXV




CHPTA – Cased with Internal TXV



CAPFA cased



CAPEA / CAPE
Cased with EEV

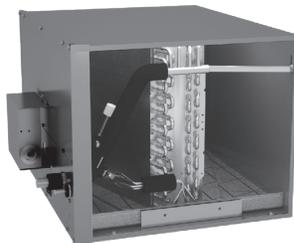

CHPE
Horizontal "A" with EEV

R32

Standard Features

- All-Aluminum evaporator coil
- Optimized for use with R-32 refrigerant including circuits and manifolds
- R-32 sensor designed for the life span of the coil
- CAPTA and CHPTA models feature factory-installed thermal expansion valves for cooling and heat pump applications
- CAPEA and CHPEA models feature:
 - Factory-installed electronic expansion valve (EEV) for precise refrigerant control
 - Compatibility with Daikin *One+* smart thermostat and other Daikin communicating equipment
 - Cooling and heat pump applications
 - Fault recall of six most recent faults
- CAPFA models feature optimized metering devices (piston)
- Standardized copper suction tube stub length
- Vertical and horizontal models available
- 21" depth for easier attic access
- CAPFA, CAPTA, CHPTA and CAPEA, CHPEA include single front access panel
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Drain pan rails designed to remove and reposition coils with ease without compromising structural integrity
- UV-resistant drain pan
- AHRI certified; ETL listed

Note: Do not use these coils on oil furnaces or any applications where the temperature on the drain pan may exceed 300° F. If these coils are applied with an oil furnace or another application where high temperatures threaten or jeopardize the durability of the drain pan, you must replace the factory-installed drain pan with a high-temperature drain pan. High-temperature drain pan kits are available as field-installed accessories.



* Complete warranty details available from your local dealer or at www.amana-hac.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

NOMENCLATURE

	C	A	P	T	A	1	8	1	4	A	3	A	A		
	1	2	3	4	5	6	7	8	9	10	11	12	13		
Product Category															
C Indoor Coil															
Application															
A Upflow/Downflow Coil															
H Horizontal A Coil															
S Horizontal Slab Coil															
Cabinet Finish															
U Uncased															
P Cased - Painted															
C Cased - Unpainted															
Expansion Device															
F Flowrater															
T TXV															
E Electronic Expansion Valve															
Coil Configuration (7mm)															
A A Coil															
											Engineering				
											Major/ Minor Revisions				
											Refrigerant				
											3 - R-32				
											CA & CS Series Width / CH Series Height				
											S - 25½" A - 14" D - 24½"				
											M - 33½" B - 17½"				
											L - 39½" C - 21"				
											CA Series Height / CH Series Width / CS Series Depth				
											12 - 12" Coil 14 - 14" Coil 22 - 22" Coil				
											18 - 18" Coil 26 - 26" Coil				
											30 - 30" Coil				
Nominal Capacity															
				18 - 1½ Tons				30 - 3 Tons				42 - 3½ Tons			
				24 - 2 Tons				36 - 3 Tons				48 - 4 Tons			
												60 - 5 Tons			


CAPTA — CASED UPFLOW/DOWNFLOW INDOOR COILS

SPECIFICATIONS

MODEL	CABINET DIMENSIONS			NOMINAL TONS	CONNECTION		SHIP WEIGHT (LBS)
	W	D	H		LIQUID	SUCTION	
CAPTA1818A3	14"	21"	18"	1½	¾"	¾"	30
CAPTA1818B3	17½"	21"	18"	1½	¾"	¾"	35
CAPTA2422A3	14"	21"	22"	1½ - 2	¾"	¾"	37
CAPTA2422B3	17½"	21"	22"	1½ - 2	¾"	¾"	40
CAPTA2422C3	21"	21"	22"	1½ - 2	¾"	¾"	43
CAPTA3022A3	14"	21"	22"	2 - 2½	¾"	¾"	37
CAPTA3022B3	17½"	21"	22"	2 - 2½	¾"	¾"	40
CAPTA3022C3	21"	21"	22"	2 - 2½	¾"	¾"	43
CAPTA3026B3	17½"	21"	26"	1½ - 2½	¾"	7⁄8"	46
CAPTA3026C3	21"	21"	26"	1½ - 2½	¾"	7⁄8"	51
CAPTA3626B3	17½"	21"	26"	2 - 3	¾"	7⁄8"	48
CAPTA3626C3	21"	21"	26"	2 - 3	¾"	7⁄8"	51
CAPTA4230C3	21"	21"	30"	2½ - 3½	¾"	7⁄8"	66
CAPTA4230D3	24½"	21"	30"	2½ - 3½	¾"	7⁄8"	70
CAPTA6030C3	21"	21"	30"	3½ - 5	¾"	7⁄8"	66
CAPTA6030D3	24½"	21"	30"	3½ - 5	¾"	7⁄8"	70

Note: For a properly matched system and piston sizing information, refer to Daikin piston kit chart of the corresponding Daikin outdoor unit.

DIMENSIONS

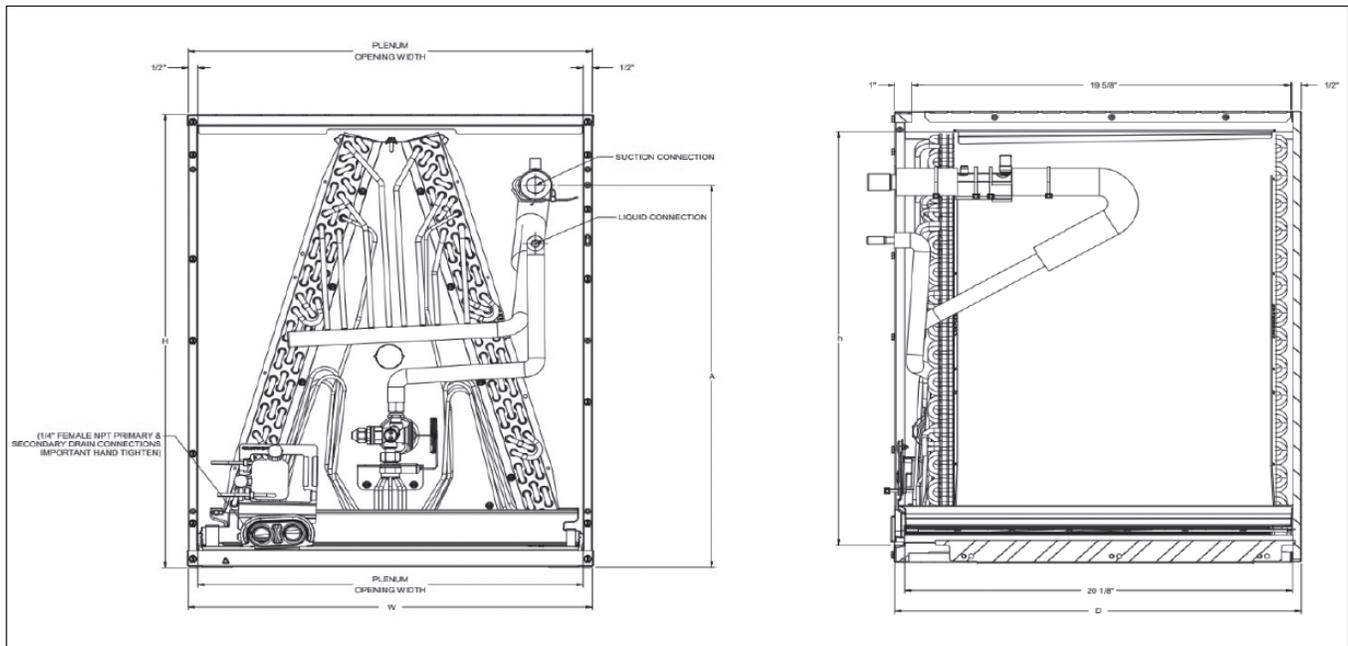

CHPTA— CASED HORIZONTAL INDOOR COILS





SPECIFICATIONS

MODEL	CABINET DIMENSIONS			NOMINAL TONS	CONNECTION		SHIP WEIGHT (LBS)
	W	D	H		LIQUID	SUCTION	
CHPTA1822A3	22"	21"	14"	1½	¾"	¾"	46
CHPTA1822B3	22"	21"	17½"	1½	¾"	¾"	50
CHPTA2426B3	26"	21"	17½"	1½ - 2	¾"	7⁄8"	55
CHPTA2426C3	26"	21"	21"	1½ - 2	¾"	7⁄8"	57
CHPTA3026B3	26"	21"	17½"	2 - 2½	¾"	7⁄8"	59
CHPTA3026C3	26"	21"	21"	2 - 2½	¾"	7⁄8"	62
CHPTA3630B3	30"	21"	17½"	2½ - 3	¾"	7⁄8"	66
CHPTA3630C3	30"	21"	21"	2½ - 3	¾"	7⁄8"	70
CHPTA4230C3	30"	21"	21"	2½ - 3½	¾"	7⁄8"	70
CHPTA4830C3	30"	21"	21"	3½ - 4	¾"	7⁄8"	78
CHPTA6030D3	30"	21"	24½"	4 - 5	¾"	7⁄8"	82

Note: For a properly matched system and piston sizing information, refer to Daikin piston kit chart of the corresponding Daikin outdoor unit.

DIMENSIONS

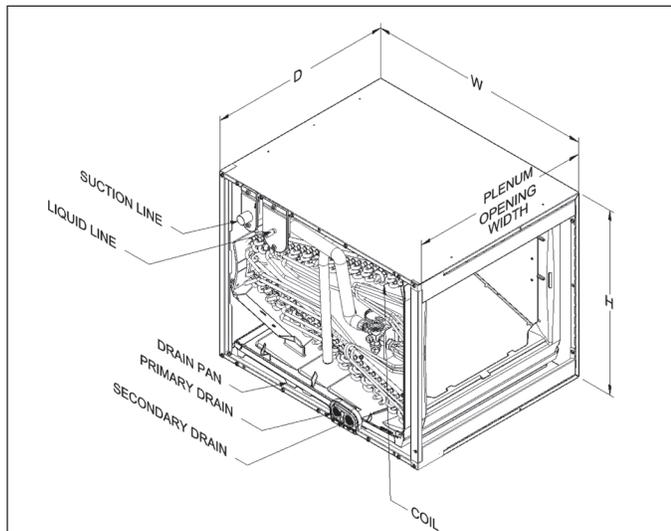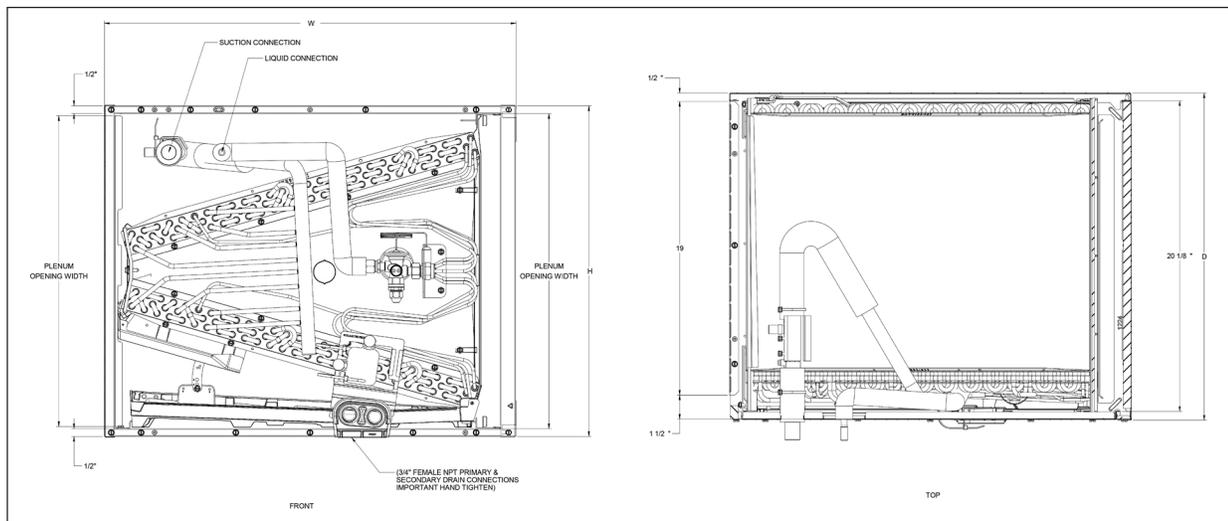

CAPFA— CASED HORIZONTAL INDOOR COILS




SPECIFICATIONS

MODEL	CABINET DIMENSIONS				NOMINAL TONS	CONNECTION		SHIP WEIGHT (LBS)
	W	D	H	A		LIQUID	SUCTION	
CAPFA1818A3	14"	21"	18"	14"	1½	¾"	¾"	28
CAPFA1818B3	17½"	21"	18"	15½"	1½	¾"	¾"	34
CAPFA1818C3	21"	21"	18"	14"	1½	¾"	¾"	43
CAPFA2422A3	14"	21"	22"	18"	2	¾"	¾"	42
CAPFA2422B3	17½"	21"	22"	18"	2	¾"	¾"	42
CAPFA2422C3	21"	21"	22"	18"	2	¾"	¾"	42
CAPFA3022A3	14"	21"	22"	18"	2½	¾"	¾"	36
CAPFA3022B3	17½"	21"	22"	18"	2½	¾"	¾"	42
CAPFA3022C3	21"	21"	22"	18"	2½	¾"	¾"	42
CAPFA3022D3	24½"	21"	22"	18"	2½	¾"	¾"	53
CAPFA3626B3	17½"	21"	26"	22"	3	¾"	¾"	46
CAPFA3626C3	21"	21"	26"	22"	3	¾"	¾"	50
CAPFA3626D3	24½"	21"	26"	22"	3	¾"	¾"	61
CAPFA4226B3	17½"	21"	26"	22"	3½	¾"	¾"	46
CAPFA4226C3	21"	21"	26"	22"	3½	¾"	¾"	50
CAPFA4226D3	24½"	21"	26"	22"	3½	¾"	¾"	61
CAPFA6030C3	21"	21"	30"	26"	4	¾"	¾"	66
CAPFA6030D3	24½"	21"	30"	26"	5	¾"	¾"	69

Note: For a properly matched system and piston sizing information, refer to Daikin piston kit chart of the corresponding Daikin outdoor unit.

DIMENSIONS

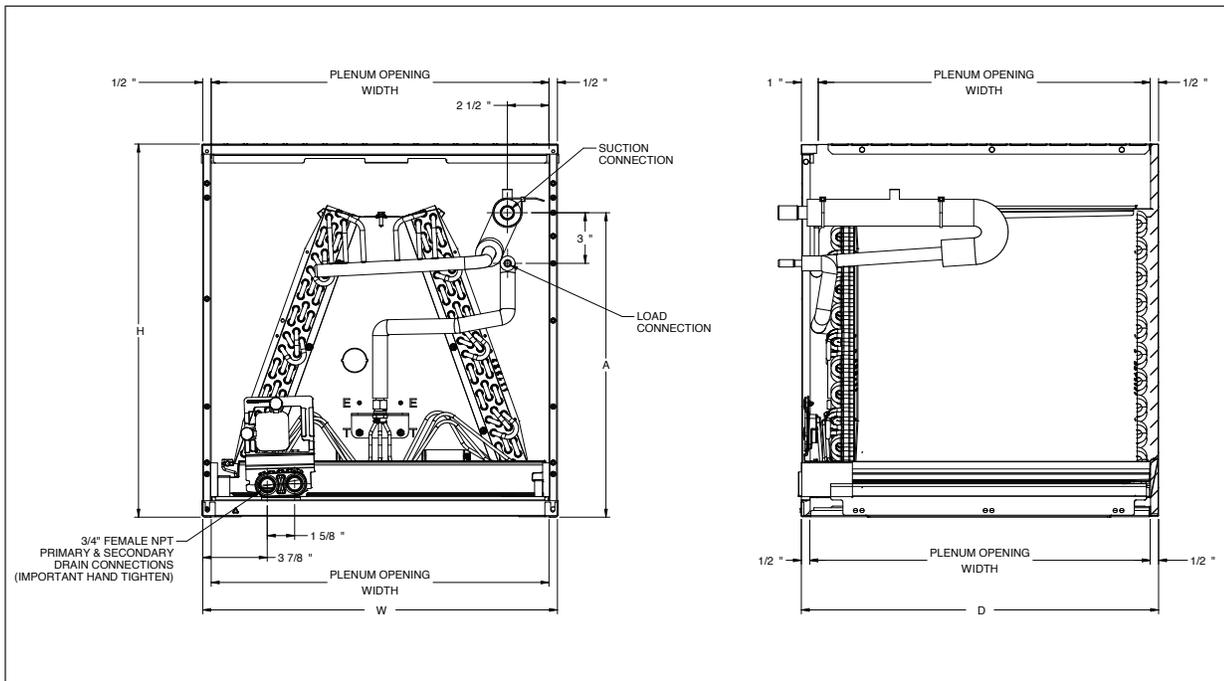

CAPEA— CASED HORIZONTAL INDOOR COILS




SPECIFICATIONS

MODEL	CABINET DIMENSIONS			NOMINAL TONS	CONNECTION		SHIP WEIGHT (LBS)
	W	D	H		LIQUID	SUCTION	
CAPEA2418B3	17.5	21	18		5/16" or 3/8"	5/8" or 3/4"	43
CAPEA2418C3	21	21	18		5/16" or 3/8"	5/8" or 3/4"	45
CAPEA3022B3	17.5	21	22		5/16" or 3/8"	3/4" or 7/8"	48
CAPEA3022C3	21	21	22		5/16" or 3/8"	3/4" or 7/8"	51
CAPEA3626B3	17.5	21	26		5/16" or 3/8"	3/4" or 7/8"	54
CAPEA3626C3	21	21	26		5/16" or 3/8"	3/4" or 7/8"	57
CAPEA3626D3	24.5	21	26		5/16" or 3/8"	3/4" or 7/8"	62
CAPEA4830C3	21	21	30		3/8"	7/8" or 1 1/8"	68
CAPEA4830D3	24.5	21	30		3/8"	7/8" or 1 1/8"	70
CAPEA6030C3	21	21	30		3/8"	7/8" or 1 1/8"	75
CAPEA6030D3	24.5	21	30		3/8"	7/8" or 1 1/8"	78

Note: For a properly matched system and piston sizing information, refer to Daikin piston kit chart of the corresponding Daikin outdoor unit.

DIMENSIONS

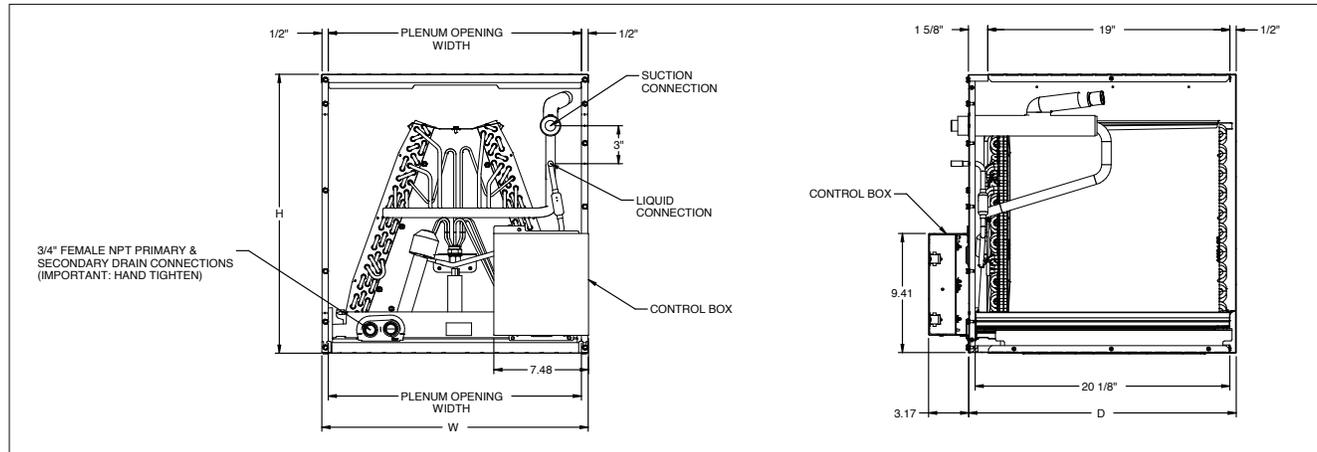

CHPEA— CASED HORIZONTAL INDOOR COILS





SPECIFICATIONS

MODEL	CABINET DIMENSIONS			NOMINAL TONS	CONNECTION		SHIP WEIGHT (LBS)
	W	D	H		LIQUID	SUCTION	
CHPEA2422B3	22"	21"	17.5"		5/16" or 3/8"	5/8" or 3/4"	56
CHPEA3026B3	26"	21"	17.5"		5/16" or 3/8"	3/4" or 7/8"	63
CHPEA3026C3	26"	21"	21"		5/16" or 3/8"	3/4" or 7/8"	67
CHPEA3626B3	26"	21"	17.5"		5/16" or 3/8"	3/4" or 7/8"	68
CHPEA3626C3	26"	21"	21"		5/16" or 3/8"	3/4" or 7/8"	70
CHPEA4830C3	30"	21"	21"		3/8"	7/8" or 1 1/8"	76
CHPEA4830D3	30"	21"	24.5"		3/8"	7/8" or 1 1/8"	78
CHPEA6030D3	30"	21"	21"		3/8"	7/8" or 1 1/8"	76
CHPEA6030C3	30"	21"	24.5"		3/8"	7/8" or 1 1/8"	78

Note: For a properly matched system and piston sizing information, refer to Daikin piston kit chart of the corresponding Daikin outdoor unit.

DIMENSIONS

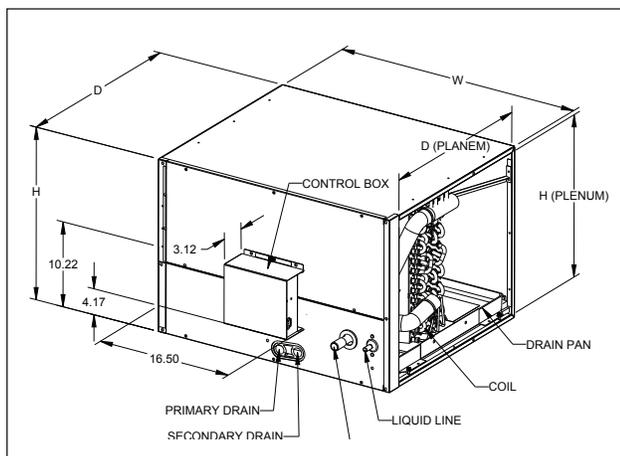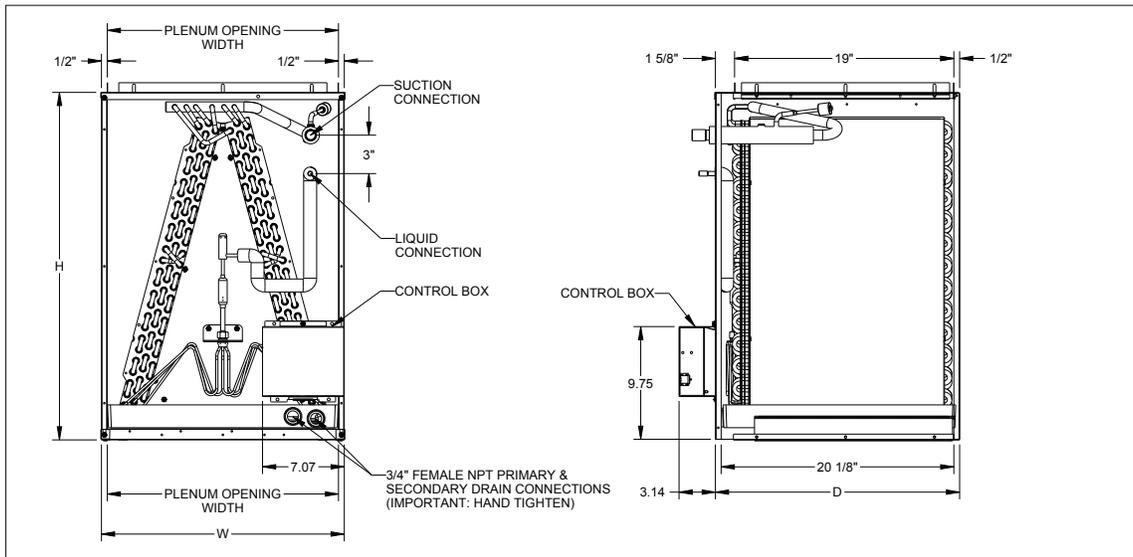

AIRFLOW DATA FOR CAPTA

AIR QUANTITY (SCFM) VS. PRESSURE DROP (IN. WC)

	SCFM	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	
CAPTA1818A3**	Wet	0.080	0.135	0.205	0.275	0.346	0.422	0.516	0.620	0.715	-	-	-	-	-	-	-	-	-	-	-
	Dry	0.074	0.115	0.180	0.239	0.297	0.368	0.443	0.543	0.638	-	-	-	-	-	-	-	-	-	-	-
CAPTA1818B3**	Wet	0.067	0.106	0.165	0.215	0.261	0.317	0.372	0.425	0.482	-	-	-	-	-	-	-	-	-	-	-
	Dry	0.050	0.087	0.125	0.175	0.215	0.265	0.319	0.381	0.444	-	-	-	-	-	-	-	-	-	-	-
CAPTA2422A3**	Wet		0.108	0.150	0.195	0.250	0.310	0.379	0.460	0.543	0.625	-	-	-	-	-	-	-	-	-	-
	Dry		0.088	0.125	0.170	0.215	0.265	0.320	0.385	0.440	0.535	-	-	-	-	-	-	-	-	-	-
CAPTA2422B3**	Wet		0.090	0.130	0.150	0.220	0.250	0.310	0.369	0.436	0.508	-	-	-	-	-	-	-	-	-	-
	Dry		0.082	0.100	0.140	0.170	0.210	0.260	0.300	0.350	0.410	-	-	-	-	-	-	-	-	-	-
CAPTA2422C3**	Wet		0.091	0.110	0.139	0.172	0.205	0.245	0.285	0.335	0.387	-	-	-	-	-	-	-	-	-	-
	Dry		0.069	0.084	0.111	0.133	0.162	0.185	0.210	0.250	0.295	-	-	-	-	-	-	-	-	-	-
CAPTA3022A3**	Wet			0.150	0.195	0.250	0.310	0.379	0.460	0.543	0.625	0.730	-	-	-	-	-	-	-	-	-
	Dry			0.125	0.170	0.215	0.265	0.320	0.385	0.440	0.535	0.618	-	-	-	-	-	-	-	-	-
CAPTA3022B3**	Wet			0.130	0.150	0.220	0.250	0.310	0.369	0.436	0.508	0.584	-	-	-	-	-	-	-	-	-
	Dry			0.100	0.140	0.170	0.210	0.260	0.300	0.350	0.410	0.480	-	-	-	-	-	-	-	-	-
CAPTA3022C3**	Wet			0.110	0.139	0.172	0.205	0.245	0.285	0.335	0.387	0.437	-	-	-	-	-	-	-	-	-
	Dry			0.084	0.111	0.133	0.162	0.185	0.210	0.250	0.295	0.330	-	-	-	-	-	-	-	-	-
CAPTA3026B3**	Wet			0.115	0.150	0.190	0.229	0.270	0.310	0.365	0.420	0.475	-	-	-	-	-	-	-	-	-
	Dry			0.096	0.122	0.150	0.183	0.215	0.252	0.292	0.334	0.382	-	-	-	-	-	-	-	-	-
CAPTA3026C3**	Wet			0.090	0.110	0.140	0.170	0.200	0.240	0.280	0.320	0.370	-	-	-	-	-	-	-	-	-
	Dry			0.080	0.100	0.120	0.150	0.180	0.210	0.240	0.260	0.300	-	-	-	-	-	-	-	-	-
CAPTA3626B3**	Wet					0.134	0.167	0.204	0.245	0.290	0.338	0.389	0.444	0.485	-	-	-	-	-	-	-
	Dry					0.127	0.157	0.190	0.229	0.269	0.316	0.360	0.415	0.450	-	-	-	-	-	-	-
CAPTA3626C3**	Wet					0.100	0.120	0.150	0.180	0.210	0.240	0.280	0.310	0.360	-	-	-	-	-	-	-
	Dry					0.080	0.100	0.130	0.150	0.170	0.200	0.230	0.270	0.300	-	-	-	-	-	-	-
CAPTA4230C3**	Wet							1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	
	Dry							0.130	0.150	0.180	0.210	0.250	0.280	0.310	0.340	0.378	0.414	0.490	0.600	0.660	
CAPTA4230D3**	Wet							0.110	0.132	0.156	0.181	0.208	0.237	0.270	0.300	0.335	0.372	0.440	0.530	0.590	
	Dry							0.120	0.140	0.160	0.190	0.220	0.250	0.280	0.310	0.350	0.380	0.480	0.530	0.590	
CAPTA6030C3**	Wet							1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	
	Dry							0.091	0.109	0.127	0.147	0.160	0.190	0.210	0.230	0.260	0.280	0.477	0.520	0.580	
CAPTA6030D3**	Wet							0.150	0.174	0.210	0.240	0.270	0.310	0.340	0.400	0.440	0.490	0.540	0.600	0.660	
	Dry							0.133	0.160	0.190	0.210	0.250	0.280	0.320	0.350	0.390	0.440	0.480	0.530	0.590	

AIRFLOW DATA FOR CHPTA

AIR QUANTITY (SCFM) VS. PRESSURE DROP (IN. WC)

	SCFM	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	
CHPTA1822A3**	Wet	0.095	0.151	0.215	0.284	0.354	0.429	0.519	0.601												
	Dry	0.064	0.094	0.144	0.199	0.284	0.353	0.431	0.513												
CHPTA1822B3**	Wet	0.090	0.120	0.140	0.190	0.250	0.310	0.390	0.460												
	Dry	0.080	0.110	0.130	0.180	0.230	0.290	0.360	0.430												
CHPTA2426B3**	Wet		0.130	0.150	0.180	0.204	0.255	0.304	0.365	0.419	0.468										
	Dry		0.100	0.120	0.150	0.170	0.210	0.240	0.290	0.330	0.410										
CHPTA2426C3**	Wet		0.110	0.140	0.160	0.180	0.200	0.230	0.270	0.320	0.370										
	Dry		0.090	0.110	0.130	0.150	0.190	0.220	0.260	0.300	0.350										
CHPTA3026B3**	Wet			0.110	0.150	0.180	0.230	0.280	0.320	0.370	0.430	0.490									
	Dry			0.120	0.140	0.170	0.210	0.250	0.290	0.340	0.400	0.460									
CHPTA3026C3**	Wet			0.100	0.130	0.150	0.170	0.200	0.230	0.260	0.300	0.340									
	Dry			0.060	0.080	0.110	0.130	0.150	0.174	0.198	0.229	0.259									
CHPTA3630B3**	Wet			0.150	0.187	0.229	0.279	0.323	0.372	0.430	0.465										
	Dry			0.128	0.153	0.191	0.237	0.285	0.330	0.377	0.428										
CHPTA3630C3**	Wet			0.140	0.175	0.205	0.245	0.285	0.325	0.365	0.410										
	Dry			0.086	0.105	0.135	0.155	0.185	0.210	0.245	0.279										
CHPTA4230C3**	Wet			0.140	0.175	0.205	0.245	0.285	0.325	0.365	0.410										
	Dry			0.086	0.105	0.135	0.155	0.185	0.210	0.245	0.279										
CHPTA4830C3**	Wet							0.210	0.250	0.304	0.352	0.402	0.457	0.510	0.570	0.630	0.693	0.761	0.831	0.894	
	Dry							0.163	0.194	0.226	0.263	0.297	0.337	0.381	0.420	0.470	0.520	0.580	0.630	0.690	
CHPTA6030D3**	Wet							0.161	0.189	0.221	0.254	0.292	0.332	0.370	0.413	0.461	0.502				
	Dry							0.140	0.160	0.190	0.220	0.250	0.283	0.314	0.351	0.389	0.402				

AIRFLOW DATA FOR CAPFA

AIR QUANTITY (SCFM) VS. PRESSURE DROP (IN. WC)

	SCFM	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	
CAPFA1818A3**	Wet	0.080	0.135	0.205	0.275	0.346	0.422	0.516	0.620	0.715											
	Dry	0.074	0.115	0.180	0.239	0.297	0.368	0.443	0.543	0.638											
CAPFA1818B3**	Wet	0.067	0.106	0.165	0.215	0.261	0.317	0.372	0.425	0.482											
	Dry	0.050	0.087	0.125	0.175	0.215	0.265	0.319	0.381	0.444											
CAPFA1818C3**	Wet	0.089	0.124	0.162	0.211	0.261	0.305	0.366	0.433	0.504											
	Dry	0.070	0.101	0.132	0.171	0.205	0.253	0.300	0.350	0.400											
CAPFA2422A3**	Wet		0.126	0.180	0.220	0.280	0.340	0.410	0.500	0.580	0.670										
	Dry		0.088	0.125	0.170	0.215	0.265	0.320	0.385	0.440	0.535										
CAPFA2422B3**	Wet		0.117	0.167	0.211	0.257	0.309	0.360	0.430	0.470	0.540										
	Dry		0.082	0.100	0.140	0.170	0.210	0.260	0.300	0.350	0.410										
CAPFA2422C3**	Wet		0.135	0.165	0.195	0.235	0.277	0.324	0.365	0.430											
	Dry		0.107	0.129	0.154	0.183	0.214	0.242	0.278	0.318											
CAPFA3022A3**	Wet		0.150	0.195	0.250	0.310	0.379	0.460	0.543	0.625	0.730										
	Dry		0.125	0.170	0.215	0.265	0.320	0.385	0.440	0.535	0.618										
CAPFA3022B3**	Wet		0.130	0.150	0.220	0.250	0.310	0.369	0.436	0.508	0.584										
	Dry		0.100	0.140	0.170	0.210	0.260	0.300	0.350	0.410	0.480										
CAPFA3022C3**	Wet		0.110	0.139	0.172	0.205	0.245	0.285	0.335	0.387	0.437										
	Dry		0.084	0.111	0.133	0.162	0.185	0.210	0.250	0.295	0.330										
CAPFA3022D3**	Wet		0.135	0.165	0.198	0.230	0.272	0.312	0.361	0.413											
	Dry		0.110	0.135	0.165	0.190	0.220	0.255	0.290	0.330											
CAPFA3626B3**	Wet		0.190	0.229	0.270	0.310	0.365	0.420	0.475												
	Dry		0.127	0.157	0.190	0.229	0.269	0.316	0.360												
CAPFA3626C3**	Wet		0.140	0.170	0.200	0.240	0.280	0.320	0.370												
	Dry		0.080	0.100	0.130	0.150	0.170	0.200	0.230												
CAPFA3626D3**	Wet		0.188	0.226	0.263	0.307	0.359														
	Dry		0.105	0.131	0.157	0.183	0.210														
CAPFA4226B3**	Wet		0.211	0.255	0.299	0.345	0.395	0.450	0.512	0.579	0.642										
	Dry		0.180	0.217	0.255	0.297	0.342	0.393	0.449	0.510	0.572										
CAPFA4226C3**	Wet		0.176	0.208	0.243	0.281	0.321	0.364	0.410	0.457	0.507										
	Dry		0.138	0.162	0.187	0.215	0.244	0.276	0.310	0.346	0.384										
CAPFA4226D3**	Wet		0.162	0.186	0.211	0.236	0.262	0.291	0.321	0.354	0.388										
	Dry		0.105	0.131	0.157	0.183	0.210	0.237	0.264	0.293	0.323										
CAPFA6030C3**	Wet		0.150	0.174	0.210	0.240	0.270	0.310	0.350	0.400	0.440										
	Dry		0.133	0.160	0.190	0.210	0.250	0.280	0.320	0.350	0.390										
CAPFA6030D3**	Wet		0.150	0.180	0.210	0.230	0.270	0.300	0.340	0.380	0.430										
	Dry		0.120	0.140	0.160	0.190	0.210	0.230	0.260	0.290	0.320										

AIRFLOW DATA FOR CHPEA

AIR QUANTITY (SCFM) VS. PRESSURE DROP (IN. WC)

	SCFM	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
CHPEA2422B3	Wet	0.057	0.103	0.158	0.22	0.291	0.371	0.453	0.532	0.625	0.697			
	Dry	0.027	0.052	0.087	0.131	0.175	0.225	0.279	0.346	0.416	0.491			
CHPEA3026B3	Wet	0.033	0.060	0.092	0.131	0.173	0.220	0.273	0.331	0.400	0.469	0.540	0.621	0.696
	Dry	0.024	0.042	0.064	0.095	0.126	0.158	0.194	0.236	0.283	0.335	0.389	0.444	0.501
CHPEA3026C3	Wet	0.032	0.061	0.087	0.119	0.148	0.184	0.222	0.277	0.323	0.361	0.415	0.468	0.500
	Dry	0.038	0.052	0.068	0.084	0.107	0.134	0.165	0.192	0.244	0.284	0.330	0.380	0.432
CHPEA3626B3	Wet	0.041	0.064	0.092	0.132	0.169	0.205	0.252	0.303	0.357	0.415	0.480	0.549	0.621
	Dry	0.028	0.048	0.072	0.099	0.131	0.166	0.207	0.251	0.299	0.353	0.412	0.474	0.540
CHPEA3626C3	Wet	0.040	0.061	0.083	0.110	0.141	0.171	0.195	0.233	0.272	0.314	0.357	0.401	0.444
	Dry	0.025	0.036	0.052	0.069	0.088	0.106	0.126	0.155	0.186	0.221	0.255	0.286	0.326
CHPEA4830C3	Wet	0.042	0.071	0.097	0.128	0.154	0.194	0.230	0.260	0.300	0.343	0.390	0.433	0.483
	Dry	0.019	0.031	0.044	0.059	0.077	0.099	0.123	0.153	0.181	0.211	0.247	0.283	0.321
CHPEA4830D3	Wet	0.036	0.058	0.081	0.112	0.143	0.171	0.204	0.238	0.277	0.319	0.363	0.410	0.447
	Dry	0.016	0.024	0.034	0.047	0.061	0.077	0.095	0.114	0.135	0.156	0.182	0.208	0.236
CHPEA6030C3	Wet	0.043	0.069	0.105	0.148	0.188	0.226	0.265	0.312	0.366	0.428	0.489	0.548	0.605
	Dry	0.019	0.031	0.044	0.059	0.077	0.099	0.123	0.153	0.181	0.211	0.247	0.283	0.321
CHPEA6030D3	Wet	0.019	0.039	0.068	0.096	0.126	0.154	0.205	0.253	0.305	0.347	0.406	0.453	0.500
	Dry	0.016	0.024	0.034	0.047	0.061	0.077	0.095	0.114	0.135	0.156	0.182	0.208	0.236
CHPEA1600	Wet	0.529	0.589	0.627	0.676	0.730	0.783	0.820	0.860	0.900	0.940	0.980	1.020	1.060
	Dry	0.362	0.404	0.451	0.496	0.546	0.596	0.646	0.696	0.746	0.796	0.846	0.896	0.946
CHPEA1700	Wet	0.491	0.537	0.582	0.618	0.662	0.706	0.750	0.794	0.838	0.882	0.926	0.970	1.014
	Dry	0.268	0.300	0.332	0.366	0.400	0.434	0.468	0.502	0.536	0.570	0.604	0.638	0.672
CHPEA1800	Wet	0.529	0.589	0.627	0.676	0.730	0.783	0.820	0.860	0.900	0.940	0.980	1.020	1.060
	Dry	0.362	0.404	0.451	0.496	0.546	0.596	0.646	0.696	0.746	0.796	0.846	0.896	0.946
CHPEA1900	Wet	0.491	0.537	0.582	0.618	0.662	0.706	0.750	0.794	0.838	0.882	0.926	0.970	1.014
	Dry	0.268	0.300	0.332	0.366	0.400	0.434	0.468	0.502	0.536	0.570	0.604	0.638	0.672
CHPEA2000	Wet	0.529	0.589	0.627	0.676	0.730	0.783	0.820	0.860	0.900	0.940	0.980	1.020	1.060
	Dry	0.362	0.404	0.451	0.496	0.546	0.596	0.646	0.696	0.746	0.796	0.846	0.896	0.946

ACCESSORIES

HIGH-TEMP DRAIN PAN KITS FOR CAPFA & CAPTA

DRAIN PAN KITS	FURNACE SIZE
HTP7-A	14" Furnaces
<i>coming soon</i>	17½" Furnaces
HTP7-C	21" Furnaces
HTP7-D	24½" Furnaces

DRAIN PAN INSULATION KITS FOR CAPTA, CAPFA

KIT NUMBER	CABINET WIDTH
DPICX-AB	14"
DPICX-BB	17½"
DPICX-CB	21"
DPICX-DB	24½"
DPICX-DC (Use only for CAPTA6030D3, CAPFA6030D3 and CAUTA6030D3)	24½"

UV-C PART NUMBERS

MODELS	LAMP
UC18S15-24	UCP-16013
UC18S15-24B	UCP-16012

HORIZONTAL RIGHT COIL ACCESSORY FOR HIGH HUMIDITY ENVIRONMENT FOR CHPTA

DRAIN PAN KITS	FURNACE SIZE
HHCMK01	All Horizontal cabinets

R32 ACCESSORY KIT FOR NON-A2L FURNACE FOR CAPTA, CHPTA, CAPFA

KIT NUMBER	FURNACE TYPE
0230K00044	Non-A2L furnaces

R32 ZONING ACCESSORY KIT FOR CAPTA, CHPTA and CAPFA

KIT NUMBER	MODELS
0230K00007	All CAPTA, CHPTA, CAPFA models

