

RO1D Series

Oil Furnace


The RO1D Series furnace is designed for manufactured and modular homes. These units incorporate high efficiency, reliability, and low maintenance. Units may be installed free standing in a utility room or enclosed in an alcove or closet. RO1D Series furnaces are A/C ready, with coil cavity box, and many burner options.



FEATURES and BENEFITS

- Sealed Combustion System: Vents exhaust gas directly outdoors and draws in 100% outside air for the burner.
- Easy Open Pawl Latch: Secures the door firmly for transit, yet allows easy removal for access.
- Choice of Air Conditioning Options: From 2 to 3 tons A/C ready.
- Large, Effective Air Filter: Room air is cleaner with this permanent washable filter.
- **High Efficiency Drum Heat Exchanger:** Delivers optimum heat transfer with low air resistance.
- Appliance Quality Door: Protects against rust and other corrosion. Baked enamel finish allows for easy cleaning.
- Fully Insulated Cabinet: Insures minimized heat loss and quiet operation.
- Reliable Burner: With uniform flame pattern extends life of heat exchanger.

MODEL IDENTIFICATION

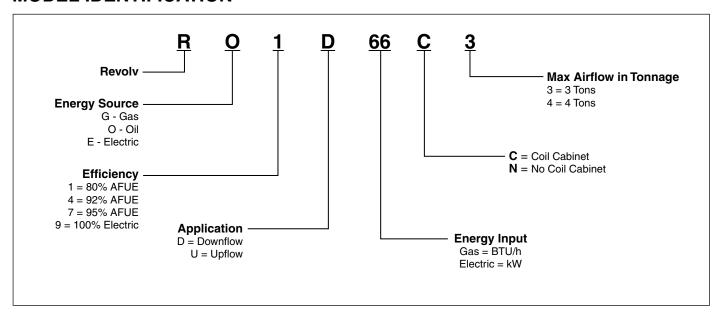

SPECIFICATIONS

Furnace	Input	Output	Output		Burner	Comb.	Motor	Motor	A/C Ready		Shippin	g Weight
Model No	MBtu/h	MBtu/h	Nozzle	In WC	Model	Blower	Нр	FLA	Tons	AFUE %	A Cabinet	B Cabinet
RO1D66C3	66	56	.50 Gph, 80°A	0.3	Beckett	х	1/4	6	3	83	151	165
RO1D86C3	86	73	.65 Ghp, 80°A	0.3		x	1/4	6	3	63	158	173


Electrical Supply - 120 volts, 60HZ, 1 Ph.

Fuse or Breaker - 15 amps Temperature Rise - 45° to 75°F

Thermostat Circuit - 24 volts, 60HZ, 30 vac

Normal Anticipator Setting - 0.4

DIMENSIONS

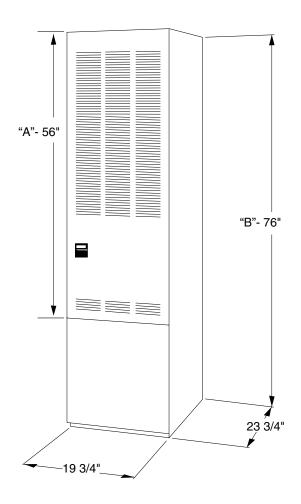

"A" Model without Coil Cabinet "B" Model with Coil Cabinet

CLEARANCES

ALL MODELS	CLOSET	ALCOVE
Front	6"	18"
Back	0"	0"
Sides	0"	0"
Roof Jack	0"	0"
Тор	6"	6"
Top and Sides of Duct	0"	0"
Bottom of Duct		
B Cabinet	0"	0"
A Cabinet (w/coil box)	0"	0"
A Cabinet (w/o coil box)	1/4"	1/4"

BLOWER PERFORMANCE

			ESP	CFM WITHOUT COIL			CFM WITH COIL				
Model No.	HP/wheel	Speed	(" WC)	Low	Med-Lo	Med-Hi	High	Low	Med-Lo	Med-Hi	High
			0.1		740	950	1210		730	930	1140
			0.2		730	940	1190		720	920	1110
RO1D66C3	1/4 HP		0.3		700	920	1140		690	880	1050
RO1D86C3 10 x 8	10 x 8	0.4		670	880	1090		660	840	990	
			0.5		640	840	1030		620	790	930
			0.6		610	780	970		580	740	870

ACCESSORIES

Description	Part Number
Blower, 2-4 Ton	903413
Blower, 2-5 Ton	903890
Automatic Cavity Damper	901083
New England Safety Kit	901855
Ceiling Rings (2 piece adjustable)	902521
Transit Vent Kit 12 / carton	903838

Vent Kits	Part Number
Soffit Air Inlet (for VentilAire III only)	917201A
Wall Vent Kit (side wall depressurization)	914115
Soffit Vent Kit (soffit depressurization)	914116
Roof Vent Kit (roof depressurization)	914117
Air Tube Kit M (high capacity M Series gas/oil furnaces)	914118
VentilAire III - Sloped 3/12	914098B
VentilAire IV - Sloped 3/12	914229B

Plenum Connectors		Part Number
11.25 x 13.50 x 0.88	12 / carton	901987A
11.25 x 13.50 x 2.00	12 / carton	901988A
11.25 x 13.50 x 4.25	6 / carton	901989A
11.25 x 13.50 x 6.25	6 / carton	901990A
11.25 x 13.50 x 8.25	4 / carton	901991A
11.25 x 13.50 x 10.25	3 / carton	901992A
11.25 x 13.50 x 12.25	3 / carton	901993A
11.25 x 13.50 x 6.25	24 / carton	902681A

Slope Flas	Part Number	
2.5" in 12"	- 4 / carton	903893
3" in 12"	- 4 / carton	903894
4" in 12"	903895	

Roof Jack	Part Number
FAW1523-0A	903658
FAW2135-0A	903659
FAW2747-0A	903660
SAW2135-2A	903662
SAW2747-2A	903663
SAW3563-2A	903664
SAW5195-2A	920638
SAW2747-4A	903678A
SAW3563-4A	903665A
SAW5195-4A	903666A

Stainless Steel	Part Number
FAW 1523-0S	903670
FAW 2135-0S	903671
SAW 2135-2S	903672
SAW 3563-2S	903673
SAW 5195-4S	903674A

Flue Extensions	Part Number
E110A-5	901935
E118A-5	903107
E116A-5	901937







GENERAL TERMS OF LIMITED WARRANTY

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Style Crest® warranty department for a copy.